


APPLETON RECEPTACLE

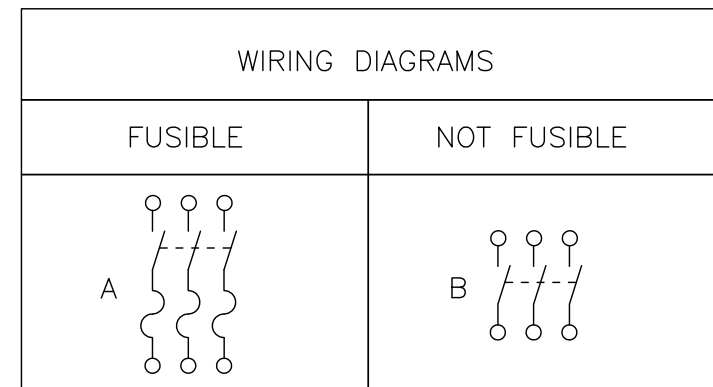

| TERMINAL LUG DATA ± | | | |
|---------------------|----------|----------|------|
| AMPERES | MAX WIRE | MIN WIRE | TYPE |
| 100 | #1/0 AWG | #12 AWG | AL |
| 100 | #1/0 AWG | #14 AWG | CU |

NOTES:
FINISH: SWITCH – GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPHATIZED STEEL.
RECEPTACLE – EPOXY POWDER COATING OVER COPPER-FREE CAST ALUMINUM.
UL LISTED – FILE E85159
CSA CERTIFIED
SUITABLE FOR USE AS SERVICE EQUIPMENT.
SHORT CIRCUIT RATING:
10,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS H OR K FUSES.
200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS R OR J FUSES.
WHEN MOUNTING THESE SWITCHES, ALLOW 4.00/[102] MIN CLEARANCE BETWEEN ENCLOSURES FOR
OPENING OF SIDE HINGED DOOR.
■ FOR SINGLE PHASE HP RATINGS USE 2 OUTER SWITCHING POLES.
◆ USE 2 OUTER SWITCHING POLES.
± LUG SUITABLE FOR 60°C OR 75°C CONDUCTORS.

DUAL DIMENSIONS: INCHES
MILLIMETERS

| CATALOG NUMBER | VOLTAGE RATING | AMPERE RATING | WIRING DIAG | HORSEPOWER RATINGS ■ | | | | | | | | |
|---------------------|--------------------------------|------------------|----------------|----------------------|---------|----------|----------|---------|---------|----------|--------------|---------|
| | | | | 480VAC | | | | 600VAC | | | 250 VDC ♦ | |
| | | | | STD | | MAX | | STD | MAX | | | |
| | | | | 1Ø | 3Ø | 1Ø | 3Ø | 3Ø | 1Ø | 3Ø | STD | MAX |
| H363AWA HU363AWA | 600VAC;250VDC 600VAC;250VDC | 100 100 | A B | 10 — | 25 — | 30 40 | 60 75 | 30 — | — 40 | 75 75 | 20 — | — 20 |

HEAVY DUTY SAFETY SWITCHES
WITH RECEPTACLE
100 AMPERES – SERIES F7
ENCLOSURE – NEMA TYPE 12 INDUSTRIAL AND
NEMA TYPE 3R RAIN-TIGHT



DWG# 1945
NO.