


APPLETON RECEPTACLE

DUAL DIMENSIONS: INCHES
MILLIMETERS

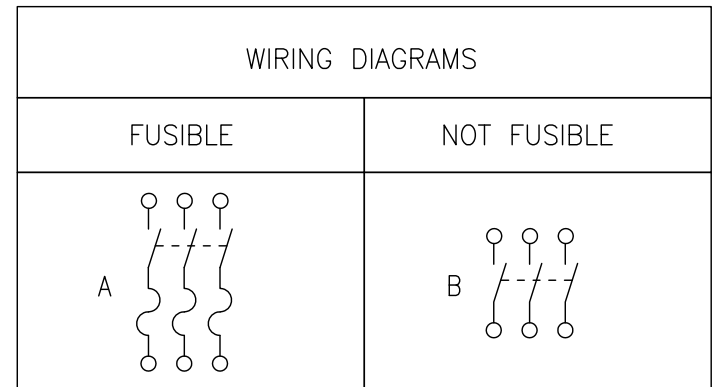

TERMINAL LUG DATA			
AMPERES	MAX WIRE	MIN WIRE	TYPE
30	#6 AWG	#12 AWG	AL
30	#6 AWG	#14 AWG	CU
60	#3 AWG	#12 AWG	AL
60	#3 AWG	#14 AWG	CU

NOTES:
FINISH: SWITCH – GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPHATIZED STEEL.
RECEPTACLE – EPOXY POWDER COATING OVER COPPER-FREE CAST ALUMINUM.
UL LISTED – FILE E85159
CSA CERTIFIED
SUITABLE FOR USE AS SERVICE EQUIPMENT.
SHORT CIRCUIT RATING:
10,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS H OR K FUSES.
200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS R OR J FUSES.
WHEN USED IN AN OUTDOOR APPLICATION REMOVE DRAIN IN BOTTOM ENDWALL.
WHEN MOUNTING THESE SWITCHES, ALLOW 4.00/[102] MIN CLEARANCE BETWEEN ENCLOSURES FOR
OPENING OF SIDE HINGED DOOR.
■ FOR SINGLE PHASE HP RATINGS USE 2 OUTER SWITCHING POLES.
◆ USE 2 OUTER SWITCHING POLES.
LUG SUITABLE FOR 60°C OR 75°C CONDUCTORS.

CATALOG NUMBER	VOLTAGE RATING	AMPERE RATING	WIRING DIAG	HORSEPOWER RATINGS ■								
				480VAC				600VAC			250 VDC ◆	
				STD		MAX		STD	MAX			
				1 Ø	3 Ø	1 Ø	3 Ø	3 Ø	1 Ø	3 Ø	STD	MAX
H361AWA	600VAC;250VDC	30	A	3	5	7 1/2	15	7 1/2	–	20	5	–
H362AWA	600VAC;250VDC	60	A	5	15	20	30	15	–	50	10	–
HU361AWA	600VAC;250VDC	30	B	–	–	10	20	–	15	30	–	5
HU362AWA	600VAC;250VDC	60	B	–	–	25	50	–	30	60	–	10

HEAVY DUTY SAFETY SWITCHES
WITH RECEPTACLE
30–60 AMPERES – SERIES F7
ENCLOSURE – NEMA TYPE 12
INDUSTRIAL AND NEMA TYPE 3R RAINIGHT



DWG# 1934
NO.