


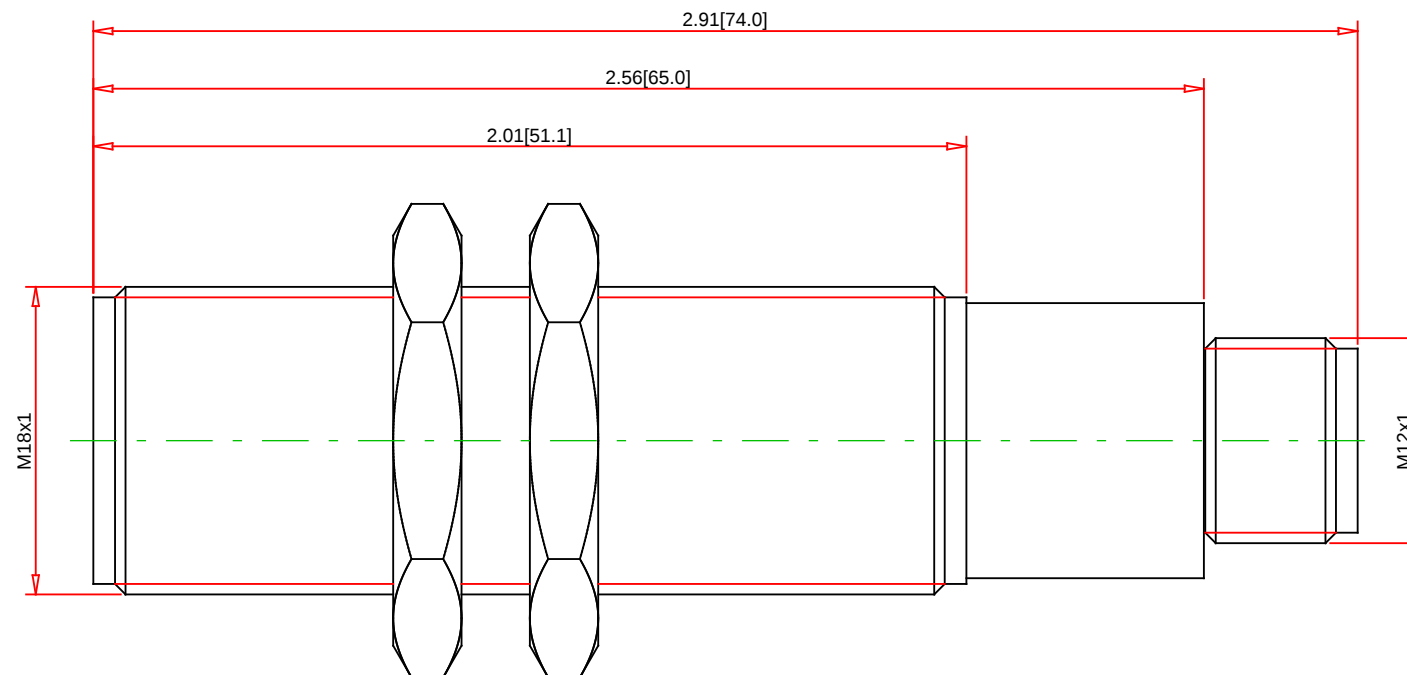

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
SM660A54800

 **Telemecanique**
Sensors
Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:
Sensing Window: 77.0 mm (3.0 in)
Far Limit: 127.0 mm (5.0 in)
Sensing Range:
Circuit Type: Normally Open
Output Mode: NPN/PNP
Volts Type: DC
Voltage Range: 12-24 VDC
Max Load: 100 mA
Current Consumption: 60 mA
Sonic Frequency: 500 Hz
Temp Range: 0° to 60° C (32° to 140° F)
NEMA Type: 4X (indoor use only)
IP Rating: IP67
Standards: UL, CE Rohs

Specification:
Sensor Type: Ultrasonic Sensor
Description: Ultrasonic Sensor, Discrete, 18 mm Barrel, 12-24 VDC
Body Style: Barrel
Diameter: 18 mm
Housing Material: 0
Face Material: Silicone Rubber
Field Configurable: No
Functionality: Standard On/Off
Cable Size:
Connector Type: M12 4-pin reversed outputs
Special Features: