
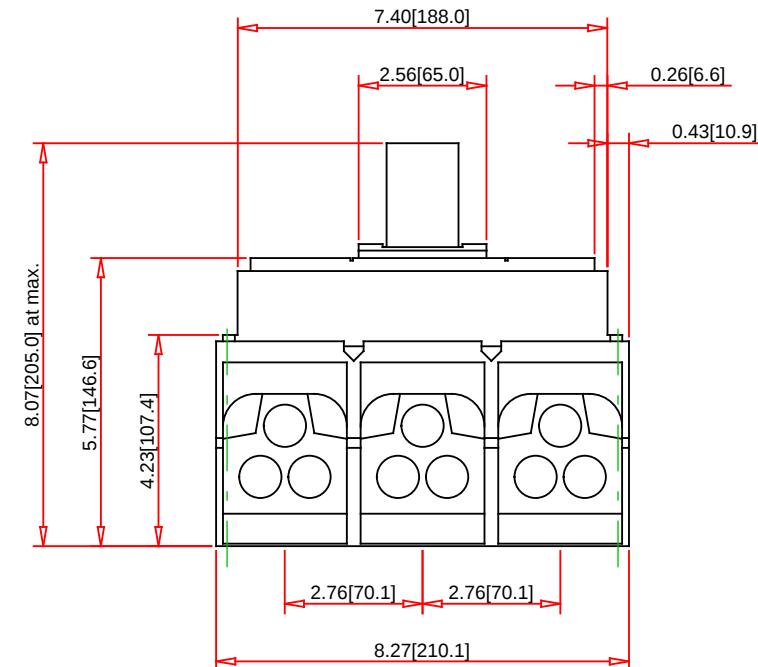
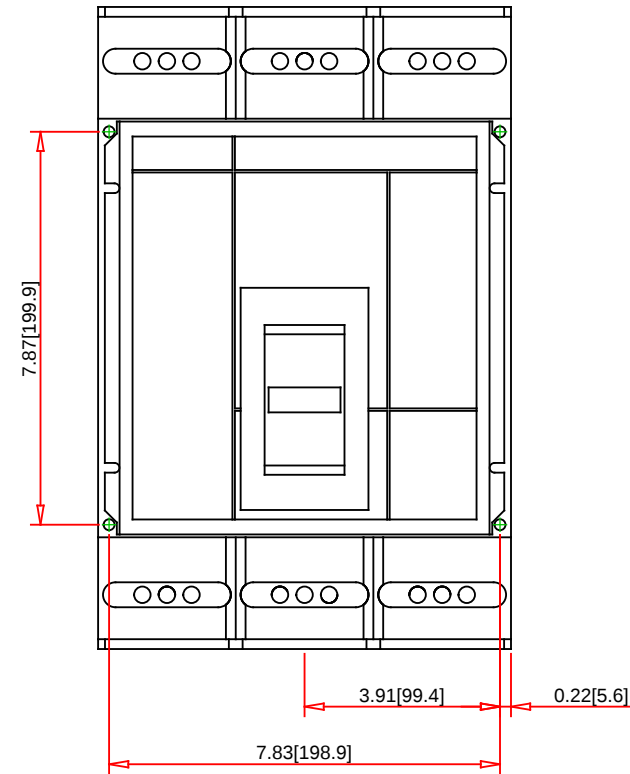


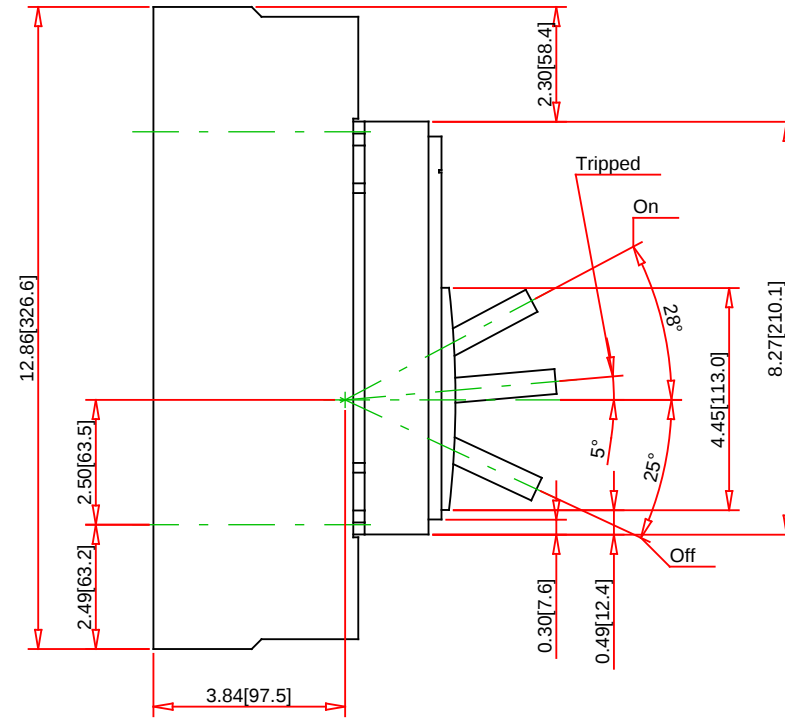

Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

PGL36060U64AE1



by Schneider Electric

Schneider Electric United States  
North American Division  
Boston One Campus  
800 Federal Street  
Andover, MA 01810, USA  
Phone: +1 8773425173  
Email: CCC@us.schneider-electric.com

Technical Information:

General Application: Provides overload and short circuit protection  
For Use With: Panelboards and Switchboards  
Approvals: UL Listed - CSA Certified - IEC Rated  
Mounting Type: Unit Mount  
Terminal Type: Lugs (ON and OFF ends)  
Wire Size: #3/0-500 AWG/kcmil(Al/Cu)  
Weight: 32 Pounds  
Depth: 8.07 Inches  
Height: 12.86 Inches  
Width: 8.27 Inches

Description: PowerPact P-frame Electronic Trip Circuit Breaker  
Number of Poles: 3-Pole  
Sensor Rating: 600A  
Voltage Rating: 600VAC  
Interrupting Rating: 65kA at 240VAC - 35kA at 480VAC - 18kA at 600VAC  
Circuit Breaker Rating: 80% Rated  
Electronic Trip Unit: Micrologic Power Trip Unit (6.0P)  
Trip Function: LSIG  
Installed Rating Plug: Type A  
Rating Plug Range: 0.4A to 1A

Specification: