


# 8536SDO2V08

NEMA Motor Starter, Type S, nonreversing,  
Size 2, 45A, 25 HP at 460 VAC, 5 kA SCCR,  
2 phase, 4 pole, melting alloy, 208 VAC coil,  
open

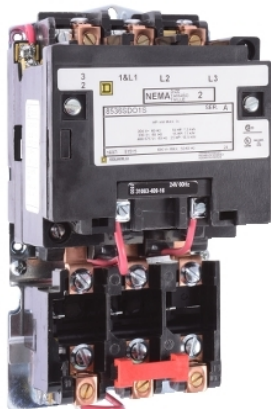

## Main

Product Type	Motor starter
Product Range	S
Starter Type	Non reversing

## Complementary

NEMA Size	2
Rated Current	45 A
Number of Poles	4P
Maximum Voltage Rating	600 V AC
Phase	2 phases
Type of Overload	Melting alloy 2
Horsepower Rating	10 HP 200 V AC 15 HP 230 V AC 25 HP 460 V AC 25 HP 575 V AC
SCCR	Circuit-breaker: 5 kA at 600 V AC Fuse: 5 kA at 600 V AC
Coil Voltage	208 V AC 60 Hz
Control Circuit Type	Common control circuit
Control Units	No control units
Pilot Light	Without pilot light
Auxiliary Contacts	Without
Terminal Type	Screw clamp terminals
Height	7.81 in (198.37 mm)
Width	5.63 in (143.00 mm)
Depth	4.94 in (125.48 mm)

## Environment

Enclosure Type	Not rated (open device)
Certifications	UL Listed CSA NEMA




## Ordering and shipping details

Category	21192-8502,36 SC,SD(NOT S*R,T,W)
Discount Schedule	CP1
GTIN	785901341864
Nbr. of units in pkg.	1
Package weight(Lbs)	7.75 lb(US) (3.515 kg)
Returnability	No
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	7.80 in (19.8 cm)
Package 1 width	5.63 in (14.3 cm)
Package 1 Length	4.92 in (12.5 cm)

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 <a href="#">Yes</a>
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
PVC free	Yes

## Contractual warranty

Warranty	18 months
----------	-----------