


# 8702SGO3V03

NEMA Contactor, Type S, reversing, horizontal, Size 5, 270A, 200 HP at 575 VAC, 3 phase, up to 100 kA, 3 pole, 240 VAC coil, open style

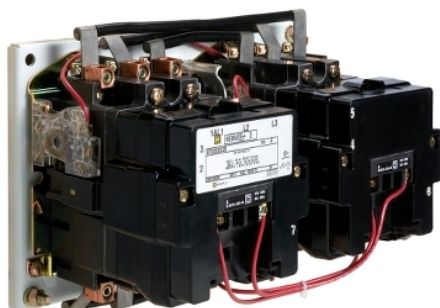

## Main

Product Type	Contactors
Product Range	Type S
Contactors Type	Reversing

## Complementary

NEMA Size	5
Rated Current	270 A
Number of Poles	3P
Mounting Orientation	Horizontal
Wiring Mode	3 wires
Maximum Voltage Rating	600 V AC
Phase	3 phase
Horsepower Rating	75 HP 200 V AC 100 HP 230 V AC 200 HP 460 V AC 200 HP 575 V AC
SCCR	Circuit-breaker 400 A maximum, SCCR: 100 kA at 480 V AC Fuse J 400 A maximum, SCCR: 100 kA at 600 V AC Fuse T 400 A maximum, SCCR: 100 kA at 600 V AC Fuse RK1 400 A maximum, SCCR: 100 kA at 600 V AC Fuse RK5 400 A maximum, SCCR: 100 kA at 600 V AC
Coil Voltage	220 V AC 50 Hz 240 V AC 60 Hz
Control Circuit Type	Common control circuit
Control Units	No control units
Pilot Light	No indicator
Other Equipment	Fuse not supplied
Terminal Type	Screw clamp terminals
Height	16.19 in (411.23 mm)
Width	19.31 in (490.47 mm)
Depth	9.38 in (238.25 mm)

## Environment

Enclosure Type	Not rated (open device)
Certifications	UL Listed CSA


## Ordering and shipping details

Category	21274-8702,36SG(NOT S*R,S*T,S*W)
Discount Schedule	CP1
GTIN	3606482141100
Nbr. of units in pkg.	1
Package weight(Lbs)	30.00 lb(US) (13.608 kg)
Returnability	No
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	16.18 in (41.1 cm)
Package 1 width	19.29 in (49 cm)
Package 1 Length	9.37 in (23.8 cm)

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
EU RoHS Directive	Not compliant
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>

## Contractual warranty

Warranty	18 months
----------	-----------