




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

SM380A22810FP

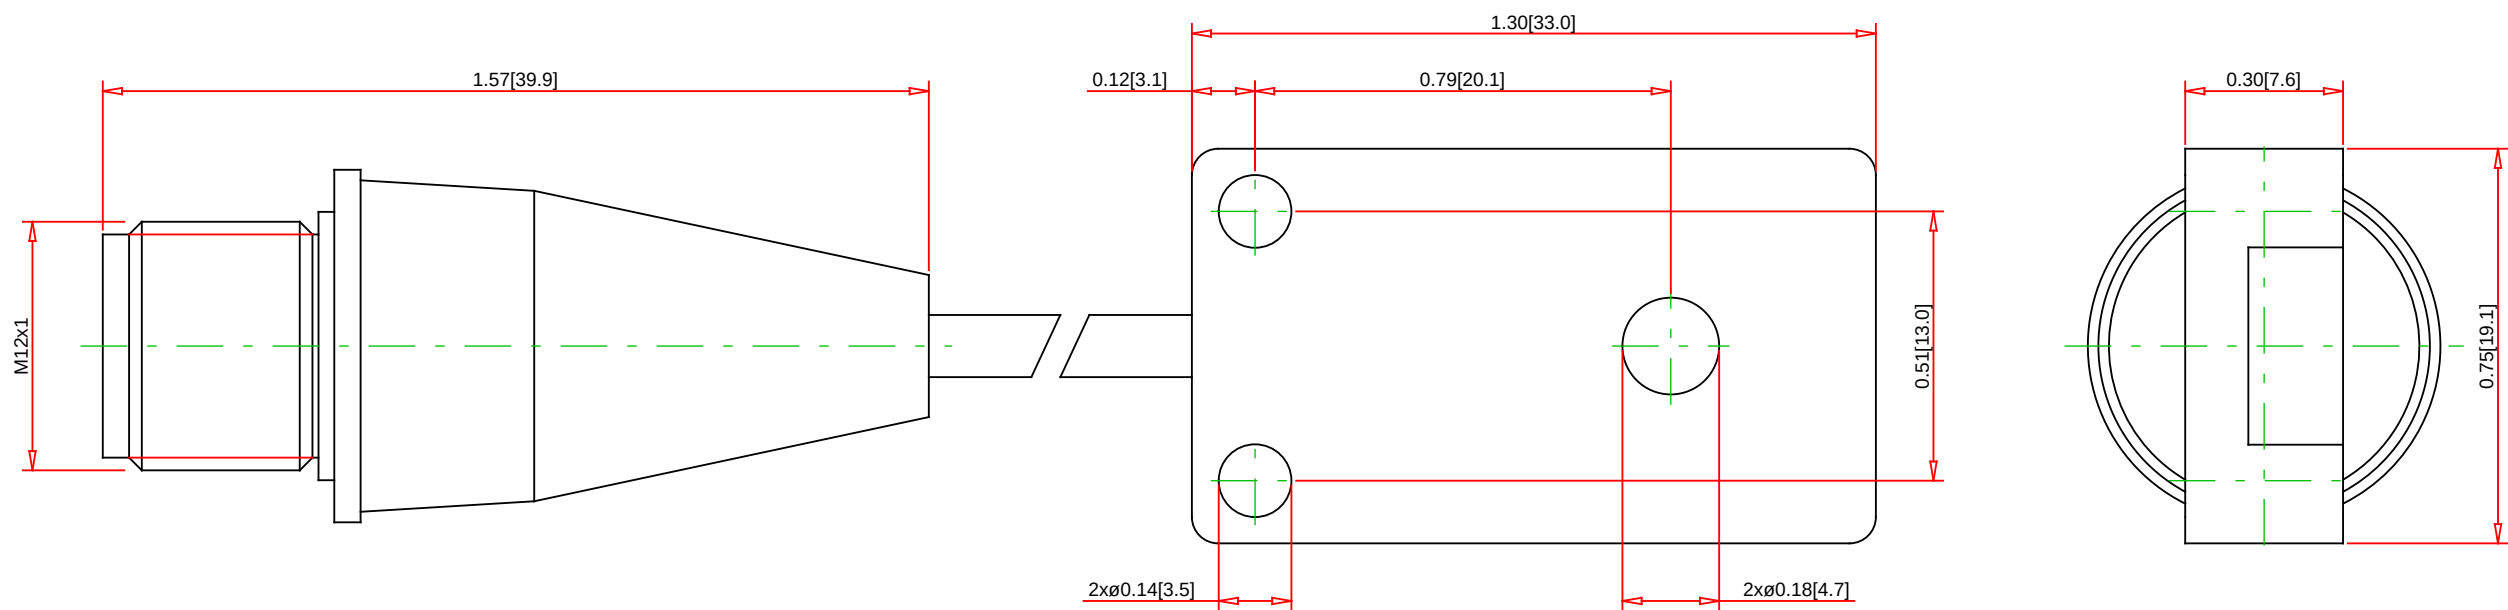

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Sensing Window: 44.5 mm (1.75 in)
Far Limit: 50.8 mm (2.0 in)
Sensing Range:
Circuit Type: Normally Closed
Output Mode: NPN/PNP
Volts Type: DC
Voltage Range: 12-24 VDC
Max Load: 100 mA
Current Consumption: 25 mA
Sonic Frequency: 500 kHz
Temp Range: -30° to 70° C (-22° to 158° F)
NEMA Type: 4X (indoor use only)
IP Rating: IP67
Standards: UL, CE Rohs

Specification:

Sensor Type: Ultrasonic Sensor
Description: Ultrasonic Sensor, Discrete, Miniature Flat Profile, 12-24 VDC
Body Style: Miniature Flat Profile
Diameter:
Housing Material: 0
Face Material: Glass Epoxy
Field Configurable: No
Functionality: Standard On/Off
Cable Size: 152 mm (6 in) pigtail
Connector Type: M12 pigtail
Special Features: Flat profile