


## Product data sheet

### Characteristics

## 8736SAO16V06

NEMA Starter, Type S, reversing, horizontal, Size 00, 9A, 2 HP at 575 VAC, 5 kA SSCR, 3 phase, 3 pole, melting alloy overload, 480 VAC coil, open

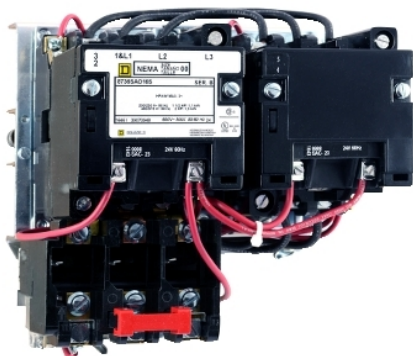

### Main

Product Type	Starter
Product Range	S
Starter Type	Reversing

### Complementary

NEMA Size	00
Rated Current	9 A
Number of Poles	3P
Mounting Orientation	Horizontal
Wiring Mode	3 wires
Maximum Voltage Rating	600 V AC
Phase	3 phase
Type of Overload	Melting alloy 3
Horsepower Rating	1.5 HP 200 V AC 1.5 HP 230 V AC 2 HP 460 V AC 2 HP 575 V AC
SCCR	Circuit-breaker: 5 kA at 600 V AC Fuse: 5 kA at 600 V AC
Coil Voltage	440 V AC 50 Hz 480 V AC 60 Hz
Control Circuit Type	Common control circuit
Control Units	No control units
Pilot Light	Without pilot light
Auxiliary Contacts	Without
Terminal Type	Screw clamp terminals
Height	6.91 in (175.51 mm)
Width	7.13 in (181.10 mm)
Depth	5.31 in (134.87 mm)

### Environment

Enclosure Type	Not rated (open device)
Certifications	UL Listed CSA

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the Schneider Electric group. It is not intended to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


### Ordering and shipping details

Category	21271 - 8702,36 SA,SB(NOT S*R,T,W)
Discount Schedule	CP1
GTIN	785901862338
Nbr. of units in pkg.	1
Package weight(Lbs)	6.54 lb(US) (2.965 kg)
Returnability	No
Country of origin	MX

### Packing Units

Unit Type of Package 1	PCE
Package 1 Height	8.50 in (21.59 cm)
Package 1 width	8.00 in (20.32 cm)
Package 1 Length	12.50 in (31.75 cm)

### Offer Sustainability

EU RoHS Directive	Not compliant
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>

### Contractual warranty

Warranty	18 months
----------	-----------