



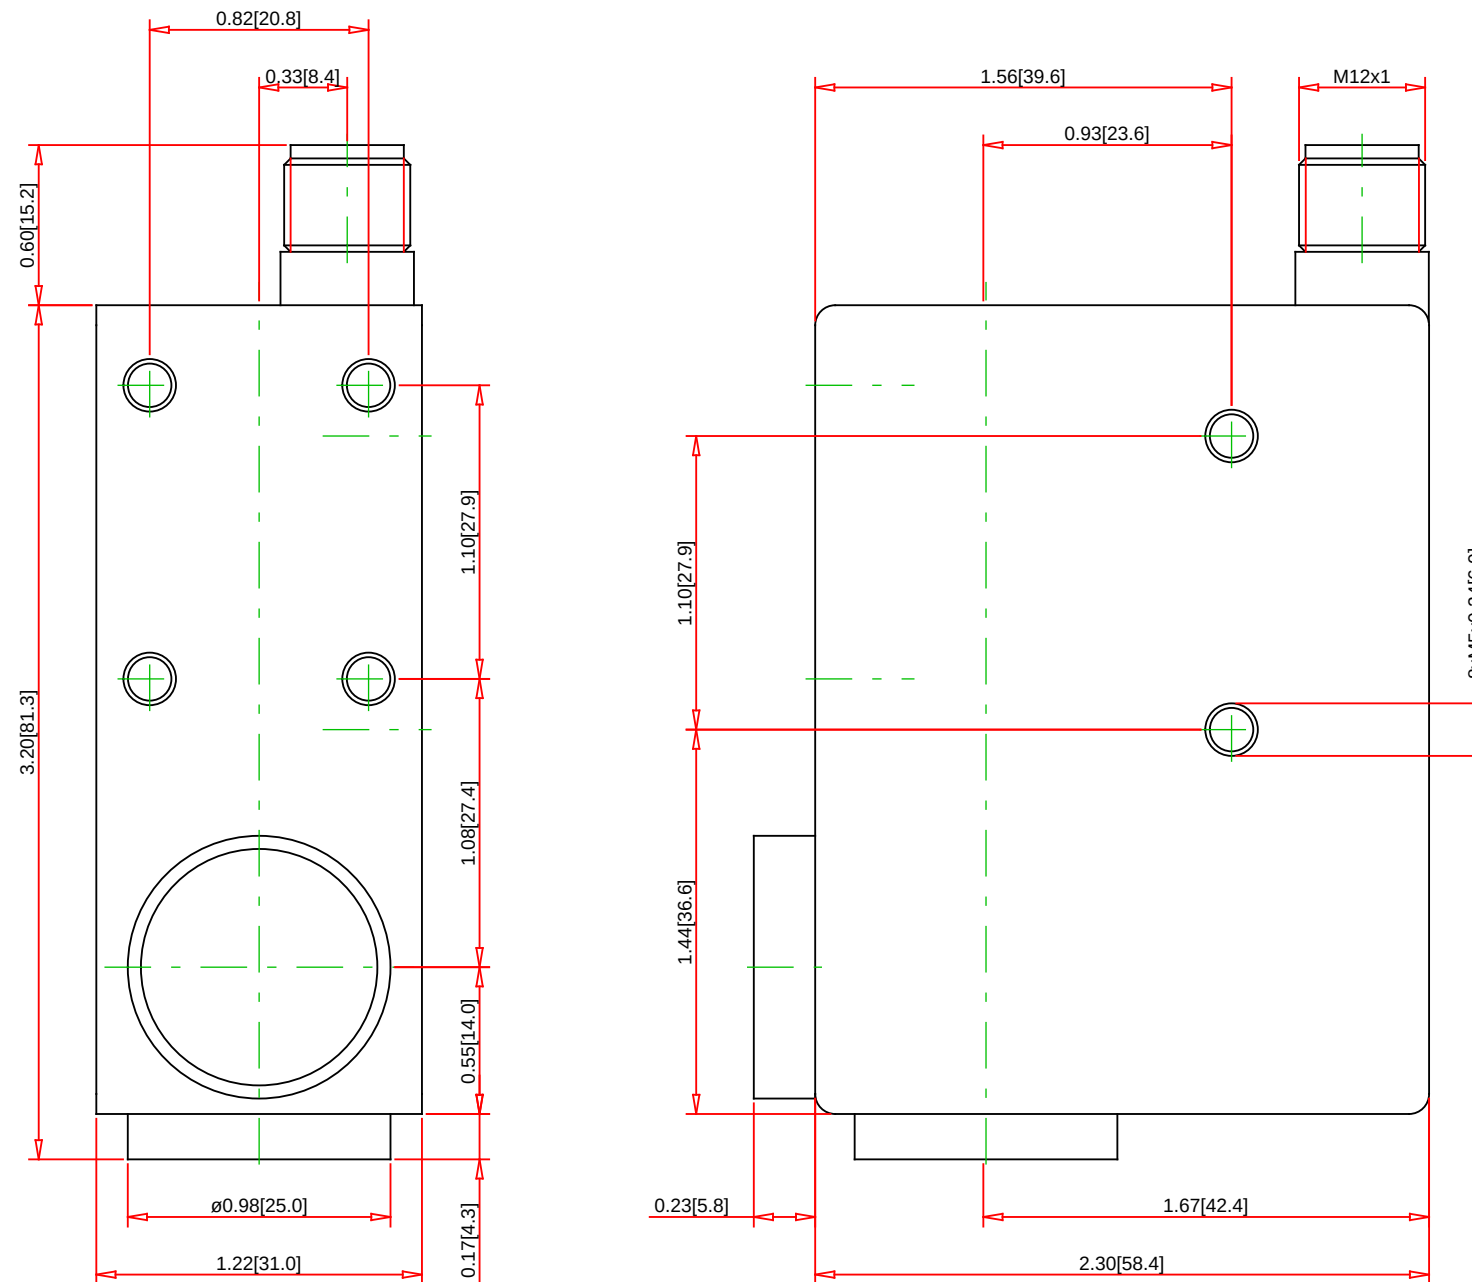

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
XURU1KSMM12



Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Diffuse with Background Suppression:
Diffuse: 9.0 mm (0.35 in)
Polarized Retroreflective:
Thru Beam:
Retroreflective:
Circuit Type: PNP/NPN or 0-7 VDC
Output Mode: Light Operate
Power: DC
Voltage Range: 12-24 VDC
Max Load: 200 mA
Max Switching Frequency : 2000 Hz
Temp Range: -10° to 55° C (13° to 131° F)
NEMA Type: 4X (indoor use only)
IP Rating: 67
Standards: UL, CE Rohs

Specification:

Sensor Type: Ultraviolet Detection - Diffuse
Description: Photoelectric, Ultraviolet Detection - Diffuse, Rectangular, 12-24 VDC
Body Style: Rectangular
Diameter:
Housing Material: Metal - Zamac
Face Material: Glass
Adjustment: Knob, Time Delay, Teach
Cable Size:
Connector Type: Adjustable M12
Special Features: Lense options: XURZ01 18 mm Sn, XURZ02 7 mm Sn