

NEMA SIZE 2 STARTER
3-POLE POLYPHASE - 600 VAC, 50-60 HZ

NEMA SIZE	CONTINUOUS CURRENT RATINGS
2	45

COIL VOLTAGE CODE (1)	VOLTAGE	
	60 HZ	50 HZ
V01	24	-
V02S	120#	110
V08	208	-
V03	240	220
V06	480	440
V07	600	550
V99	SPECIFY	SPECIFY



= 120 Volt Polyphase starters are wired for separate control.

TYPE CODE (3)	SOLID STATE OVERLOAD RELAY PROTECTION
H10	CLASS 10
H20	CLASS 20
H30	SELECTABLE CLASS 10/20

MOTOR VOLTS	MAX. HP
200	10
230	15
460	25
575	25

MINIMUM TO WALL OR BARRIER TO INSURE ADEQUATE WIRE BENDING SPACE TO LUG SURFACE WHEN THE MAXIMUM WIRE SIZE IS USED. REF. NEC 430-10

ELECTRICAL CLEARANCE/WIRE BENDING SPACE

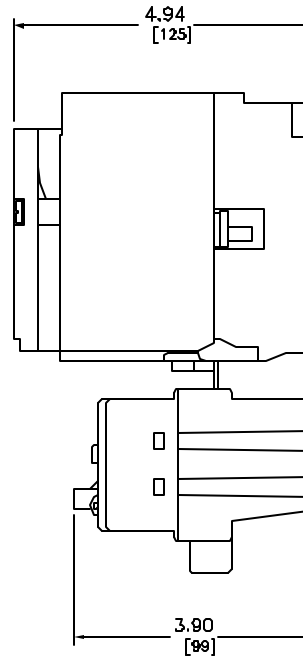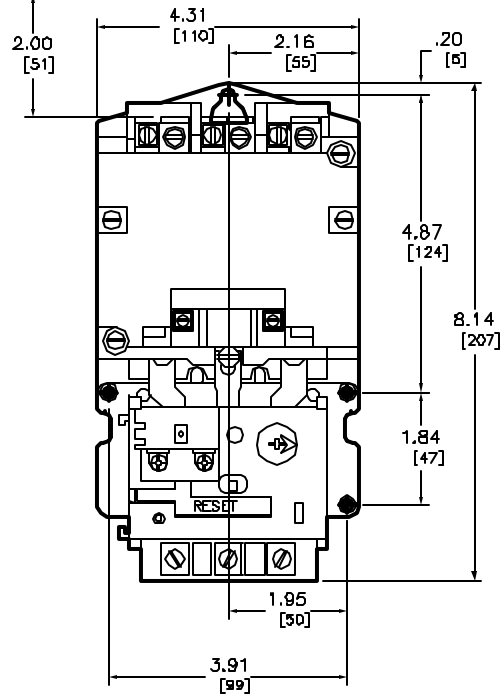

Catalog Number: 8536-SD01(1)(3)
 Ratings: SEE CHART
 UL File/CCN: NLDX
 CSA File/Class: 32011-04
 Meets Standards: -
 Weight: 6.84 lbs
 Wire Size: POWER - #14-#4, CONTROL - #10-#12
 Terminal torque: 50 lb./in.
 Mounting Hwd.: (4) #8 screws

DUAL DIMENSIONS: INCHES
MILLIMETERS

NEMA SIZE 2 STARTER W/SSOLR
CLASS 8536 TYPE SD01(1)(3)

SQUARE D
Schneider Electric

DWG# E0320501-01
NO.