




Note:  
- Drawings Not To Scale  
- Drawings Subject to Change Without Notice  
- Dimensions are inches next to [Millimeters]

Part No.:

SM380A11205FP

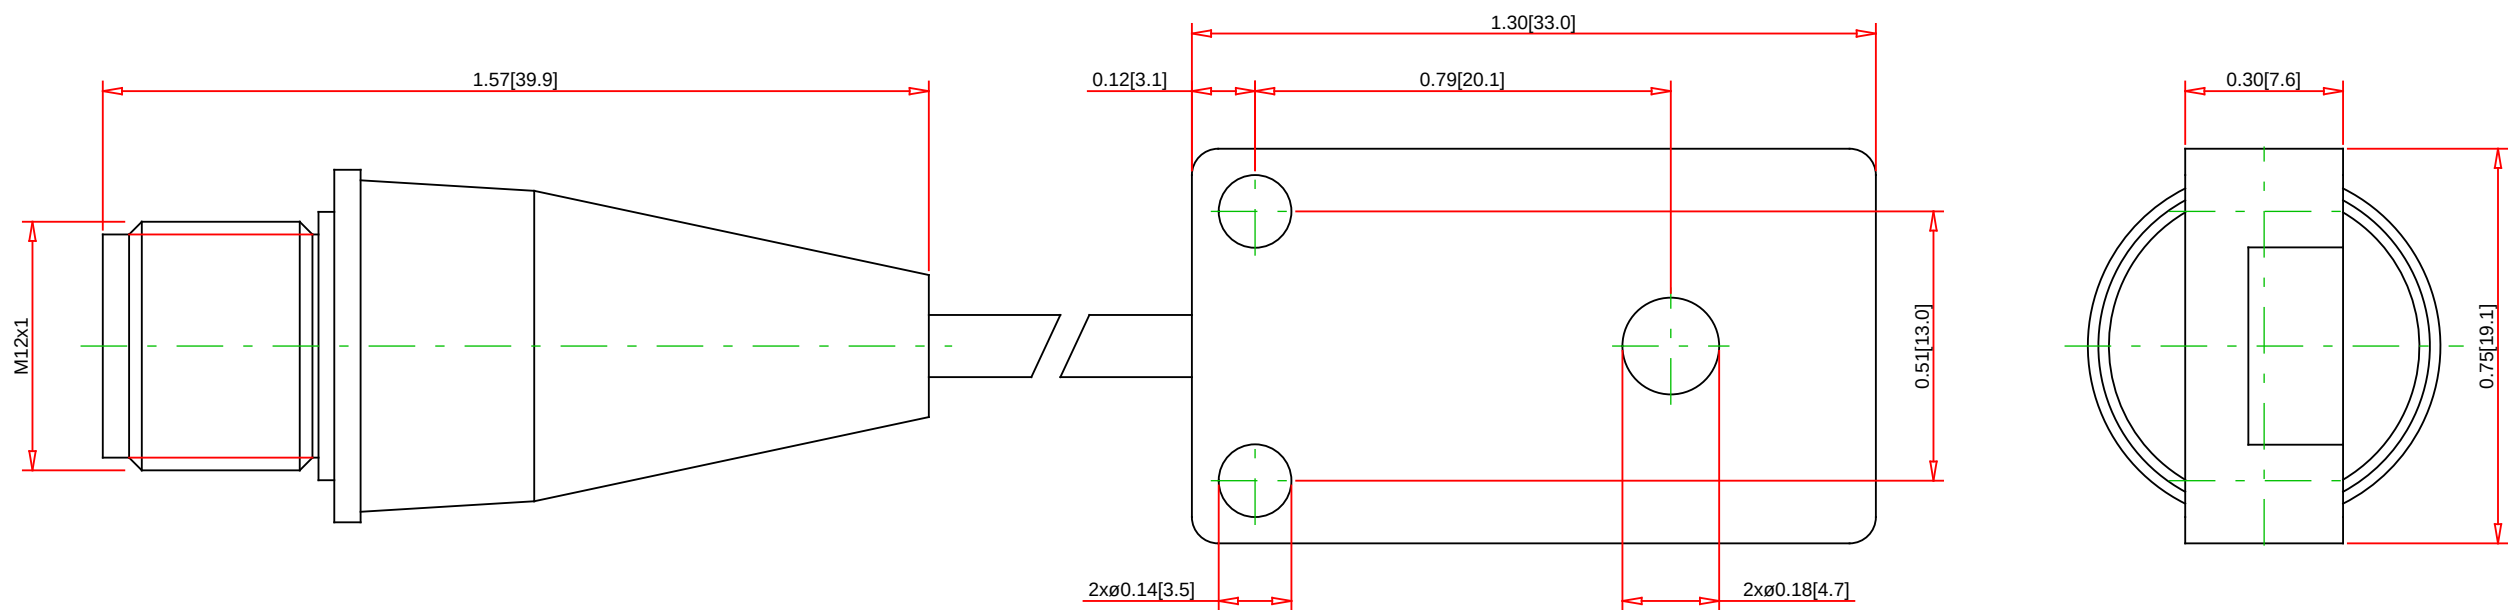

Telemecanique  
Sensors

Telemecanique Sensors  
1875 Founders Drive  
Dayton, OH 45420-4017  
Customer Care Center : 1-800-435-2121  
Web : [www.tesensors.com](http://www.tesensors.com)

Technical Information:

Sensing Window: 19.0 mm (0.75 in)  
Far Limit: 25.4 mm (1.0 in)  
Sensing Range:  
Circuit Type: Normally Open  
Output Mode: NPN/PNP  
Volts Type: DC  
Voltage Range: 12-24 VDC  
Max Load: 100 mA  
Current Consumption: 25 mA  
Sonic Frequency: 500 kHz  
Temp Range: -30° to 70° C (-22° to 158° F)  
NEMA Type: 4X (indoor use only)  
IP Rating: IP67  
Standards: UL, CE Rohs

Specification:

Sensor Type: Ultrasonic Sensor  
Description: Ultrasonic Sensor, Discrete, Miniature Flat Profile, 12-24 VDC  
Body Style: Miniature Flat Profile  
Diameter:  
Housing Material: 0  
Face Material: Glass Epoxy  
Field Configurable: No  
Functionality: 67% power, object mode  
Cable Size: 152 mm (6 in) pigtail  
Connector Type: M12 pigtail  
Special Features: Flat profile