



Main

| | |
|---------------------------|--|
| Range of Product | Harmony XVR |
| Product or Component Type | Prewired rotating mirror beacon |
| Sound signalling | Without |
| Device short name | XVR |
| Mounting diameter | 5.12 in (130 mm) |
| IP degree of protection | IP66 IEC 60529 resistant to vibration) |
| [Us] rated supply voltage | 12 V DC |
| Light source | High luminosity LED, red |

Complementary

| | |
|--|---|
| Material | ABS (acrylonitrile butadiene-styrene) body part PC globe |
| CAD overall width | 5.12 in (130 mm) |
| CAD overall depth | 5.12 in (130 mm) |
| Net Weight | 1.76 lb(US) (0.8 kg) |
| Marking | CE |
| Product mounting | By 3 M8 screws |
| Supply voltage limits | 10...15 V DC |
| [Uimp] rated impulse withstand voltage | 0.8 kV |
| Current Consumption | 250 mA |
| Flashing frequency | 2.7 Hz |
| Clamping Connection Capacity | 1.25 mm ² |
| AWG Gauge | AWG 18 |
| Cable length | 15.75 in (400 mm) |

Environment

| | |
|---------------------------------------|------------------------------|
| Standards | EN 61000-6-2 EN 61000-6-4 |
| Protective treatment | TC |
| Ambient Air Temperature for Storage | -31...158 °F (-35...70 °C) |
| Ambient Air Temperature for Operation | -22...122 °F (-30...50 °C) |
| Electrical shock protection class | Class II IEC 61140 |

Ordering and shipping details

| | |
|-------------------|------------------------|
| Category | 22617-XVC TOWER LIGHTS |
| Discount Schedule | XV |
| GTIN | 3606480033278 |
| Returnability | No |
| Country of origin | ID |

Packing Units

| | |
|------------------------------|-------------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 10.43 in (26.5 cm) |
| Package 1 Width | 7.40 in (18.8 cm) |
| Package 1 Length | 7.40 in (18.8 cm) |
| Package 1 Weight | 2.68 lb(US) (1.215 kg) |
| Unit Type of Package 2 | S04 |
| Number of Units in Package 2 | 6 |
| Package 2 Height | 11.81 in (30.0 cm) |
| Package 2 Width | 15.75 in (40.0 cm) |
| Package 2 Length | 23.62 in (60.0 cm) |
| Package 2 Weight | 18.70 lb(US) (8.482 kg) |

Offer Sustainability


| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Rotating Mirror Beacon

Dimensions

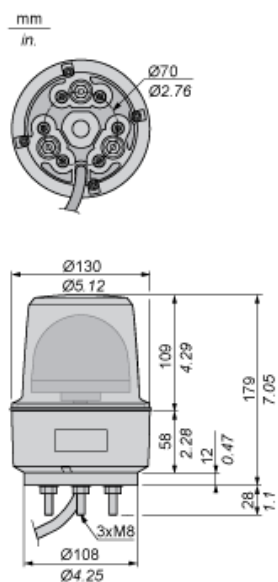

Rotating Mirror Beacon

Panel Cut-out

