


KEYSLOT MOUNTING HOLES
(2) .44/.88 DIA
[11]/[22]

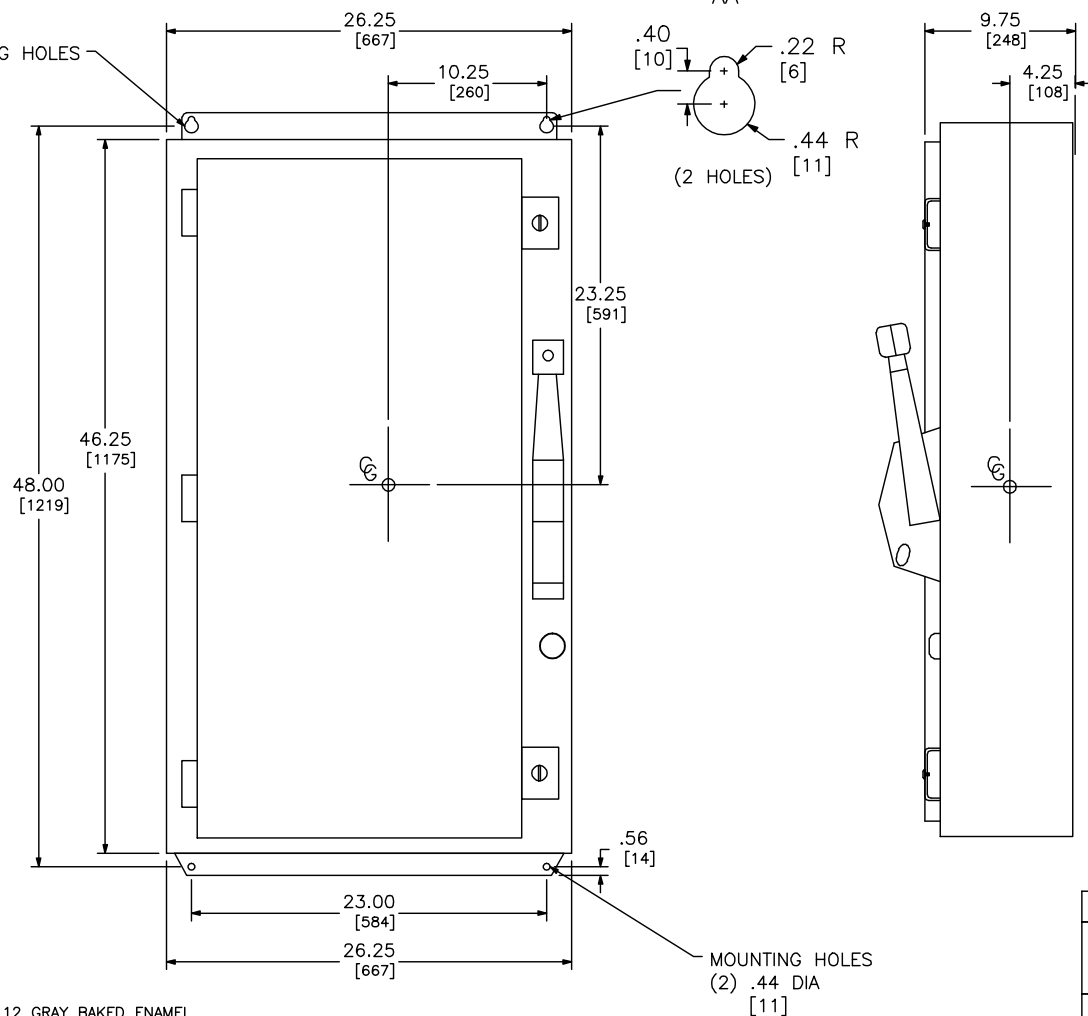

NOTES:
FINISH - NEMA TYPE 12 GRAY BAKED ENAMEL
NEMA TYPE 4, 4X, 5 TYPE 304 STAINLESS STEEL
UL LISTED - FILE E-154828
ALL NEUTRALS - INSULATED GROUNDABLE
SUITABLE FOR USE AS SERVICE EQUIPMENT
SHORT CIRCUIT CURRENT RATINGS:
10,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS H OR K FUSES.
200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS R FUSES HAVING
CLASS R REJECTION KITS INSTALLED OR CLASS J FUSES.
*FOR CORNER GROUNDED DELTA SYSTEMS ONLY AND WITH SOLID NEUTRAL ASSEMBLY INSTALLED.
■NEUTRAL ASSEMBLY CH600SNC REQUIRED FOR 480VAC, CORNER GROUNDED DELTA SYSTEM.


NEMA TYPE 4,4X,5 AND 12
NO KNOCKOUTS

MOUNTING HOLES
(2) .44 DIA
[11]

WIRING DIAGRAMS

FUSIBLE

NOT FUSIBLE



TERMINAL LUGS DATA

AMPERES	MAX WIRE	MIN WIRE	TYPE
600	(2) 500 KCMIL	(2) #3/0 AWG	AL/CU

SEISMIC NOTES:

USE (4) 3/8" DIA GRADE 5 STEEL MOUNTING BOLTS @ HOLES AA
MAX CONFIGURED WEIGHT 155 LB (AWK CATALOG NUMBERS)
157 LB (DS CATALOG NUMBERS) FOR THE PURPOSE OF DETERMINING
SEISMIC ANCHORAGE REQUIREMENTS. FOR ALL OTHER APPLICATIONS,
CONTACT SCHNEIDER ELECTRIC.

DUAL DIMENSIONS: INCHES
MILLIMETERS

CATALOG NUMBER		VOLTAGE RATINGS	WIRING DIAG	HORSEPOWER RATINGS			
NEMA TYPE 12	NEMA TYPE 4,4X,5 STAINLESS STEEL			240VAC		480VAC	
				STD	MAX	STD	MAX
				30	30	30	30
H226AWK	H226DS	240VAC;250VDC	A	75*	200*	—	—
H226NAWK	H226NDS	240VAC;250VDC	B	75*	200*	—	—
H266AWK	H266DS	600VAC;600VDC	A	—	—	150	400
HU266AWK	HU266DS	600VAC;600VDC	C	—	—	—	—

HEAVY DUTY SAFETY SWITCHES
VISIBLE BLADE TYPE
600 AMPERES
ENCLOSURE - NEMA TYPE 12
NEMA TYPE 4, 4X, 5 STAINLESS STEEL

SCHNEIDER ELECTRIC
by Schneider Electric

DWG# 2148S
NO.