


NOTES: FINISH - GRAY BAKED ENAMEL-ANSI #49  
 CSA CERTIFIED - FILE LL-97406-3  
 UL LISTED - FILE E-154828  
 ALL NEUTRALS - INSULATED GROUNDABLE (SHIPPED LOOSE)  
 SUITABLE FOR USE AS SERVICE EQUIPMENT.  
 SHORT CIRCUIT RATING:  
 200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS L FUSES.  
 75 LBS. MAX. FORCE REQUIRED TO OPERATE HANDLE.  
 FOR NEMA TYPE 3R APPLICATIONS 1/4-20 DRAIN SCREW MUST BE REMOVED.

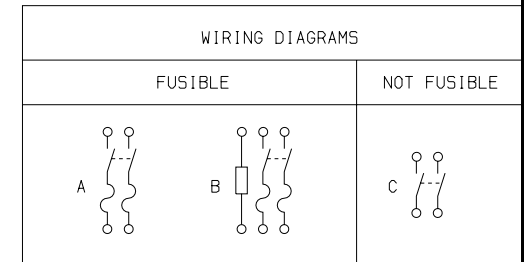

TERMINAL LUGS			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
1200	(4) 750 KCMIL	(4) #3/0 AWG	75°C AL OR CU

FUSE PROVISIONS			
AMPERES	TYPE	AMPERES	TYPE
1200	CLASS "L"	800	CLASS "L"

\* SIDE ENTRY/EXIT MUST MEET ALL APPLICABLE STANDARDS AND CODES.

DUAL DIMENSIONS: INCHES  
MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG.	3 PHASE HORSEPOWER RATINGS				DC HORSEPOWER RATINGS			
			240VAC		250VDC		600VDC			
			STD	MAX.	STD	MAX.	STD	MAX.	STD	MAX.
H228	240VAC; 250VDC	A	-	-	50	50	-	-	-	-
H228R	240VAC; 250VDC	A	-	-	50	50	-	-	-	-
H228N	240VAC; 250VDC	B	-	-	50	50	-	-	-	-
H228NR	240VAC; 250VDC	B	-	-	50	50	-	-	-	-
H268	600VAC; 600VDC	A	-	-	-	-	50	50	-	-
H268R	600VAC; 600VDC	A	-	-	-	-	50	50	-	-
HU268	600VAC; 600VDC	C	-	-	-	-	50	50	-	-
HU268R	600VAC; 600VDC	C	100	100	-	-	50	50	-	-

HEAVY DUTY SAFETY SWITCHES  
 VISIBLE BLADE TYPE  
 1200 AMPERE  
 ENCLOSURE - NEMA TYPE 1 GENERAL PURPOSE  
 NEMA TYPE 3R RAINPROOF  
 NEMA TYPE 5 DUST TIGHT (INDOOR)

**SQUARE D COMPANY**

DWG. NO. 2211