Manual switch, Type K, single unit, 600VAC, 2 pole, 30A, toggle switch, die cast zinc alloy enclosure

2510KW5B

Price*: 462.37 USD

Main

Product	Single Unit Manual Switch
Туре	К

Complementary

Complementary	
Current Rating	30 A
Cable Entry	0.75 NPT (bottom)
Horsepower Rating	2 hp 115 V AC 1 hp 90 V DC 2 hp 115 V DC 1.5 hp 230 V DC 10 hp 575 V AC 3 hp 230 V AC 7.5 hp 460 V AC
Maximum Voltage Rating	600 V AC 230 V DC
Number of Poles	2P
Control Unit Type	Toggle
Number of Phases	1 phase
Pilot Light	Red indicator, 230 V
Starter Type	Non reversing
Electrical Connection	Screw clamp terminals
Wire Gauge	AWG 14AWG 10 copper
Height	4.38 in (111.25 mm)
Width	3 in (76.20 mm)
Depth	4.56 in (115.82 mm)

Environment

Certifications	UL listed file E42243 CCN NLRV CSA LR25490 class 3211 05
NEMA Enclosure Rating	NEMA 4 die cast zinc alloy standard size

Ordering and shipping details

Category 21102-2510,2511,2512 K

^{*} Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Discount Schedule	CP1
GTIN	785901784487
Returnability	No
Country of origin	MX
Packing Units	
Unit Type of Package 1	PCE
Package 1 Length	5.50 in (13.97 cm)
Number of Units in Package 1	1
Package 1 Width	4.50 in (11.43 cm)
Package 1 Height	3.50 in (8.89 cm)
Package 1 Weight	3.52 lb(US) (1.596 kg)
Offer Sustainability	
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Not compliant
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.


Contractual warranty

PVC free

Warranty 18 months

Yes

Wiring Diagram

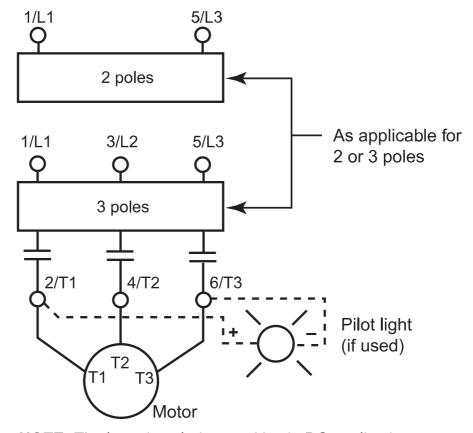

NOTE: The lamp is polarity sensitive in DC applications.

Recommended replacement(s)