


# Product data sheet

Specifications

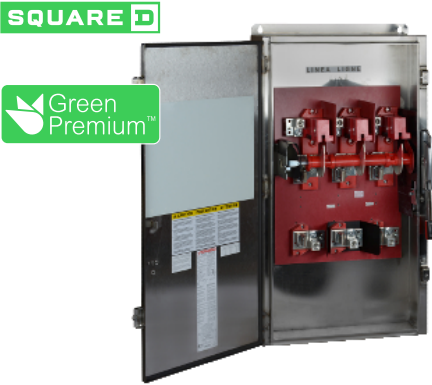

Safety switch, heavy duty, fusible,  
400A, 2 poles, 250 hp, 600 VAC/DC,  
NEMA 4, 4X, 5, 304 steel

H265DS

Product availability : Stock - Normally stocked in distribution facility

Price\* : 14,961.00 USD

## Main

Product	Single Throw Safety Switch
Duty Rating	Heavy duty
Device Application	Heavy application
Disconnect Type	Fusible disconnect
Factory Installed Neutral	None
Phase	3 phase
Number of Poles	2
Current Rating	400 A
Voltage Rating	600 V AC/DC
Enclosure Rating	NEMA 4/4X/5 stainless steel 304
Motor power hp	100 hp at 480 V AC 50-60 Hz for 3 phase motors 250 hp at 480 V AC 50-60 Hz for 3 phase motors 50 hp at 250 V DC 50 hp at 600 V DC

## Complementary

Short Circuit Current Rating	10 kA H or K 200 kA R or J
Fuse type	H or K R or J
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	2-wire
Wire Size	AWG 1/0...750 kcmil copper or aluminium
Tightening torque	550 lbf.in (62.14 N.m) (AWG 1/0...750 kcmil)
Depth	10.13 in (257.30 mm)
Width	26.25 in (666.75 mm)
Height	46.25 in (1174.75 mm)
Net Weight	175.05 lb(US) (79.4 kg)

\* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Environment

Certifications	UL listed file E2875
----------------	----------------------

Ordering and shipping details

Category	00055-H&HU SW,NEMA4&5,400-1200A
Discount Schedule	DE1
GTIN	785901259411
Returnability	No
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	18.21 in (46.251 cm)
Package 1 Width	3.99 in (10.13 cm)
Package 1 Length	10.34 in (26.251 cm)
Package 1 Weight	175.00 lb(US) (79.379 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
PVC free	Yes
Halogen content performance	Halogen free plastic parts product

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)