

Industrial control transformer, Type T, 1 phase, 250VA, 240x480V primary, 120/24V secondary, 50/60Hz

9070T250D15

Discontinued on: 30 December 2022

Price*: 447.00 USD

Main

Product Type	Industrial Control Transformer		
Power Rating	250 VA		
Туре	Т		

Complementary

Number of Phases	1 phase		
Number of Fliases	i priase		
	250 VA UL		
	250 VA CSA		
	250 VA NOM		
	160 VA		
Temperature Rise	80 °C		
Electrical Connection	Screw clamp terminals		
Height	3.2 in (81.28 mm)		
Width	3.75 in (95.25 mm)		
Depth	5.3 in (134.62 mm)		
Material	Copper winding		
Fingersafe Cover Compatibility	FSC2		

Environment

Certifications	UL listed file E61239 CSA file LR37055 guide 184-N-90
Enclosure Type	Not rated (open device)
Insulation Temperature	266 °F (130 °C)

Ordering and shipping details

Category	16206-9070 T (NOT TF) MTO				
Discount Schedule	CP8				
GTIN	785901147862				
Returnability	No				
Country of origin	US				

^{*} Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.00 in (12.7 cm)
Package 1 Width	6.00 in (15.24 cm)
Package 1 Length	7.00 in (17.78 cm)
Package 1 Weight	7.30 lb(US) (3.311 kg)

Offer Sustainability


Sustainable offer status	WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov			
California proposition 65				
REACh Regulation	REACh Declaration			
EU RoHS Directive	Compliant EU RoHS Declaration			
Mercury free	Yes			
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.			
RoHS exemption information	Yes			
Environmental Disclosure	Product Environmental Profile			
PVC free	Yes			

Contractual warranty

Warranty 10 Years

Dimensions Drawings

Approximate Dimensions

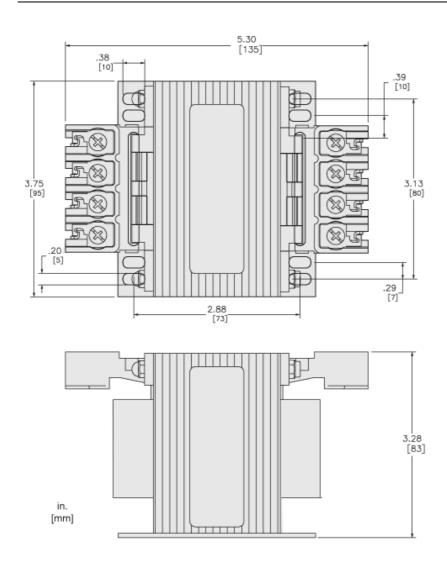

Product data sheet


9070T250D15

Connections and Schema

Connections and Wiring Diagrams

Voltage and Connection Options

Voltage Code	Voltages		Connections	
	Primary	Secondary	Primary	Secondary
D15	240 x 480	23/110 24/ /120	240: Connect to H1 and H4 Jumper H1 with H3 Jumper H2 with H4 480: Connect to H1 and H4 Jumper H2 with H3	23 or 24 or 25: Connect to X1 and X2 110 or 115 or 120: Connect to X1 and X3



Recommended replacement(s)