



NEMA TYPE 12K INDUSTRIAL

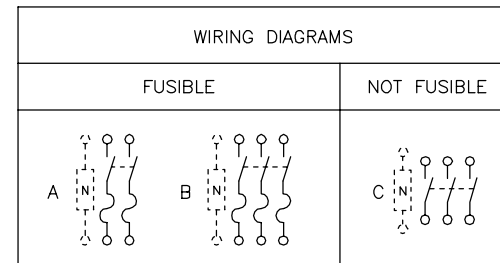

TERMINAL LUGS			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
30	#6 AWG	#12 AWG	AL
30	#6 AWG	#14 AWG	CU

KNOCKOUTS				
SYMBOL	CONDUIT SIZE		DIAMETER	
	IN	MM	IN	MM
A	.50	13	.88	22
B	.75	19	1.13	29
C	1.00	25	1.38	35
D	1.25	32	1.75	44

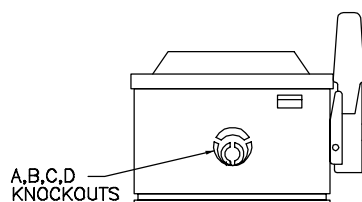

DUAL DIMENSIONS: INCHES
MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	AMPERAGE RATINGS	WIRING DIAG.	HORSEPOWER RATINGS															
				240VAC				480VAC				600VAC				250 VDC		600 VDC	
				STD.		MAX.		STD.		MAX.		STD.		MAX.		STD.	MAX.	STD.	MAX.
				1 Ø	3 Ø	1 Ø	3 Ø	1 Ø	3 Ø	1 Ø	3 Ø	1 Ø	3 Ø	1 Ø	3 Ø				
H221A	240VAC;250VDC	30	A	1 1/2●	3 *	3 ●	7 1/2 *	—	—	—	—	—	—	—	—	5 ●	—	—	—
H321A	240VAC;250VDC	30	B	1 1/2▲	3 ■	3 ▲	7 1/2 ■	—	—	—	—	—	—	—	—	5 ▲	—	—	—
H361A	600VAC;600VDC	30	B	—	—	—	—	—	—	—	—	—	—	—	—	5 ▲	—	10▲	15▲
HU361A	600VAC;600VDC	30	C	—	—	5 ▲	10 ■	—	—	7 1/2▲	20 ■	—	—	10▲	30	—	5 ▲	—	15▲
HU361AEI	600VAC;600VDC	30	C	—	—	5 ▲	10 ■	—	—	7 1/2▲	20 ■	—	—	10▲	30	—	5 ▲	—	15▲

NOTES:
UL LISTED — E2875
FINISH — GRAY BAKED ENAMEL
ALL NEUTRALS — INSULATED
WHEN MOUNTING THESE SWITCHES, ALLOW 3.00 IN / 76 MM MIN.
CLEARANCE BETWEEN ENCLOSURES FOR OPENING OF SIDE HINGED DOOR.

- ▲ USE BOTH OUTER SWITCHING POLES
- USE BOTH SWITCHING POLES
- IF CORNER GROUNDED DELTA, INSTALL NEUTRAL AND USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.
- * FOR CORNER GROUNDED DELTA ONLY, USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.

HEAVY DUTY SAFETY SWITCHES
VISIBLE BLADE TYPE
30 AMPERE—SERIES F6
ENCLOSURE — NEMA TYPE 12K

SQUARE D
Schneider Electric

DWG# 2230
NO.