


Product data sheet

Characteristics

8736SCO8V02ES

NEMA Starter, Type S, reversing, horizontal,
Size 1, 27A, 10 HP at 575 VAC, up to 65 kA
SCCR, 3 phase, 3 pole, IEC adapted bimetal,
120 VAC coil, open

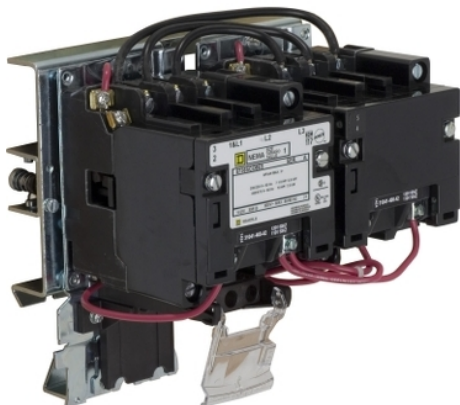

Main

Product Type	Starter
Product Range	S
Starter Type	Reversing

Complementary

NEMA Size	1
Rated Current	27 A
Number of Poles	3P
Mounting Orientation	Horizontal
Wiring Mode	3 wires
Maximum Voltage Rating	600 V AC
Phase	3 phase
Type of Overload	IEC adapted Bi-metal
Horsepower Rating	7.5 HP 200 V AC 7.5 HP 230 V AC 10 HP 460 V AC 10 HP 575 V AC
SCCR	Circuit-breaker 15 A maximum, SCCR: 65 kA at 480 V AC Circuit-breaker 15 A maximum, SCCR: 50 kA at 600 V AC Fuse J 30 A maximum, SCCR: 65 kA at 600 V AC Fuse CC 30 A maximum, SCCR: 65 kA at 600 V AC
Coil Voltage	110 V AC 50 Hz 120 V AC 60 Hz
Control Circuit Type	Separate control circuit
Control Units	No control units
Pilot Light	Without pilot light
Auxiliary Contacts	Without
Terminal Type	Screw clamp terminals
Height	6.91 in (175.51 mm)
Width	7.13 in (181.10 mm)
Depth	5.31 in (134.87 mm)

Environment

Enclosure Type	Not rated (open device)
Certifications	UL Listed CSA

Ordering and shipping details

Category	21272 - 8702,36 SC,SD(NOT S*R,T,W)
Discount Schedule	CP1
GTIN	785901395195
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.70 in (22.098 cm)
Package 1 Width	8.50 in (21.59 cm)
Package 1 Length	12.50 in (31.75 cm)
Package 1 Weight	9.49 lb(US) (4.305 kg)

Offer Sustainability

EU RoHS Directive	Not compliant
-------------------	---------------