



## Main

|                           |                    |
|---------------------------|--------------------|
| Range of Product          | Harmony 9001SK     |
| Product or Component Type | Pilot light        |
| Device short name         | 9001SK             |
| Lens type                 | Domed plastic      |
| Light block supply        | Direct 120 V AC/DC |

## Complementary

|                                             |                                                                          |
|---------------------------------------------|--------------------------------------------------------------------------|
| Bezel material                              | Plastic                                                                  |
| Mounting diameter                           | 1.18 in (30 mm)                                                          |
| Shape of signaling unit head                | Round                                                                    |
| Cap/operator or lens colour                 | Red                                                                      |
| Light source                                | incandescent                                                             |
| Bulb base                                   | BA 9s                                                                    |
| [Us] rated supply voltage                   | 120 V AC/DC                                                              |
| Tightening torque                           | 7.08 lbf.in (0.8 N.m) EN/IEC 60947-1                                     |
| Shape of screw head                         | Cross slotted                                                            |
| Connections - terminals                     | Screw clamp terminals, 1 x 0.22...2 x 1.5 mm <sup>2</sup> EN/IEC 60947-1 |
| [Ith] conventional free air thermal current | 10 A                                                                     |
| Short-circuit protection                    | 10 A cartridge fuse EN/IEC 60947-5-1                                     |
| [Ui] rated insulation voltage               | 250 V 2)EN/IEC 60947-1                                                   |
| [Uimp] rated impulse withstand voltage      | 2.5 kV EN/IEC 60947-1                                                    |
| Operating position                          | Any position                                                             |
| CAD overall width                           | 2.13 in (54 mm)                                                          |
| CAD overall height                          | 2.76 in (70 mm)                                                          |
| CAD overall depth                           | 1.65 in (42 mm)                                                          |
| Net Weight                                  | 0.18 lb(US) (0.082 kg)                                                   |
| Device presentation                         | Complete product                                                         |
| Lens type                                   | Domed                                                                    |
| [Us] rated supply voltage                   | 120 V                                                                    |
| Light block supply                          | Full voltage or resistor                                                 |
| Lens material                               | Polycarbonate                                                            |
| Size                                        | 30 mm                                                                    |
| Light source                                | Incandescent bulb                                                        |

## Environment

|                                       |                                                                                                                                  |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Electrical shock protection class     | Class II IEC 61140                                                                                                               |
| Protective treatment                  | TC                                                                                                                               |
| IP degree of protection               | IP66 IEC 60529                                                                                                                   |
| NEMA degree of protection             | NEMA 1<br>NEMA 12<br>NEMA 13<br>NEMA 2<br>NEMA 3<br>NEMA 3R<br>NEMA 4<br>NEMA 4X                                                 |
| Vibration resistance                  | 7 gn 2...500 Hz)IEC 60068-2-6                                                                                                    |
| Shock resistance                      | 50 gn IEC 60068-2-27                                                                                                             |
| Ambient Air Temperature for Operation | -13...158 °F (-25...70 °C)                                                                                                       |
| Ambient Air Temperature for Storage   | -40...158 °F (-40...70 °C)                                                                                                       |
| Standards                             | JIS C8201-5-1<br>EN/IEC 60947-5-4<br>CSA C22.2 No 14<br>EN/IEC 60947-1<br>JIS C 852<br>EN/IEC 60947-5-1<br>UL 508<br>JIS C8201-1 |
| Product Certifications                | UL 508<br>NEMA                                                                                                                   |

## Ordering and shipping details

|                   |                   |
|-------------------|-------------------|
| Category          | 21429-9001 SK,SKY |
| Discount Schedule | CS1               |
| GTIN              | 3389118037243     |
| Returnability     | Yes               |

## Packing Units


|                              |                    |
|------------------------------|--------------------|
| Unit Type of Package 1       | PCE                |
| Number of Units in Package 1 | 1                  |
| Package 1 Height             | 2.00 in (5.08 cm)  |
| Package 1 Width              | 2.20 in (5.588 cm) |
| Package 1 Length             | 3.70 in (9.398 cm) |
| Package 1 Weight             | 3.04 oz (86.183 g) |

## Offer Sustainability

|                            |                                                                                                                                                                                                                                                                                             |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                                                                                                                                       |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                                                                                                                                                                                                           |
| REACH free of SVHC         | Yes                                                                                                                                                                                                                                                                                         |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>                                                                                                                                                                                              |
| Toxic heavy metal free     | Yes                                                                                                                                                                                                                                                                                         |
| Mercury free               | Yes                                                                                                                                                                                                                                                                                         |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>                                                                                                                                                                                                                                                      |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                                                                                                                                                                                         |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                                                                                                                                                                                               |

|                             |                                                                                                                              |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Circularity Profile         | <a href="#"> End Of Life Information</a>     |
| WEEE                        | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |
| <b>Contractual warranty</b> |                                                                                                                              |
| Warranty                    | 18 months                                                                                                                    |

## Dimensions

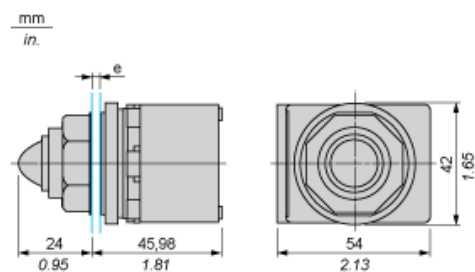

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.