70-170-1

Socket, SE Relays general purpose relay accessory, 3PDT, 15A, 300 V, 11 pins, screw clamp terminal, 750R/750H series

Main

Product Range	Legacy
Product Type	Socket
Product Compatibility	Relay 750XCXR
	Relay 750XCXH
	Relay TDRPRO-5101/5102
Number of Terminals	11
Switch Function	3PDT
Contact Composition	3 NO + 3 NC

Complementary

Rated Current	15 A
[Ue] rated operational voltage	300 V
Contact Terminal Arrangement	Mixed
Connections Terminals	Screw clamp terminals
	Output screw clamp terminalsstranded
Tightening Torque	0.9 N.m
Fixing Mode	By screw M3.5, M3.5 panel
Shape of Screw Head	Combination roundhead
Product Weight	2.01 oz (57 g)
Width	2.52 in (64 mm)
Depth	2.57 in (65.39 mm)

Environment

Ambient Air Temperature for Storage	-40…221 °F (-40…105 °C)
Ambient Air Temperature for Operation	-40…131 °F (-40…55 °C)
IP Degree of Protection	IP20
Flame Retardance	UL94-V0
Product Certifications	UL
	CSA
	CE

Ordering and shipping details

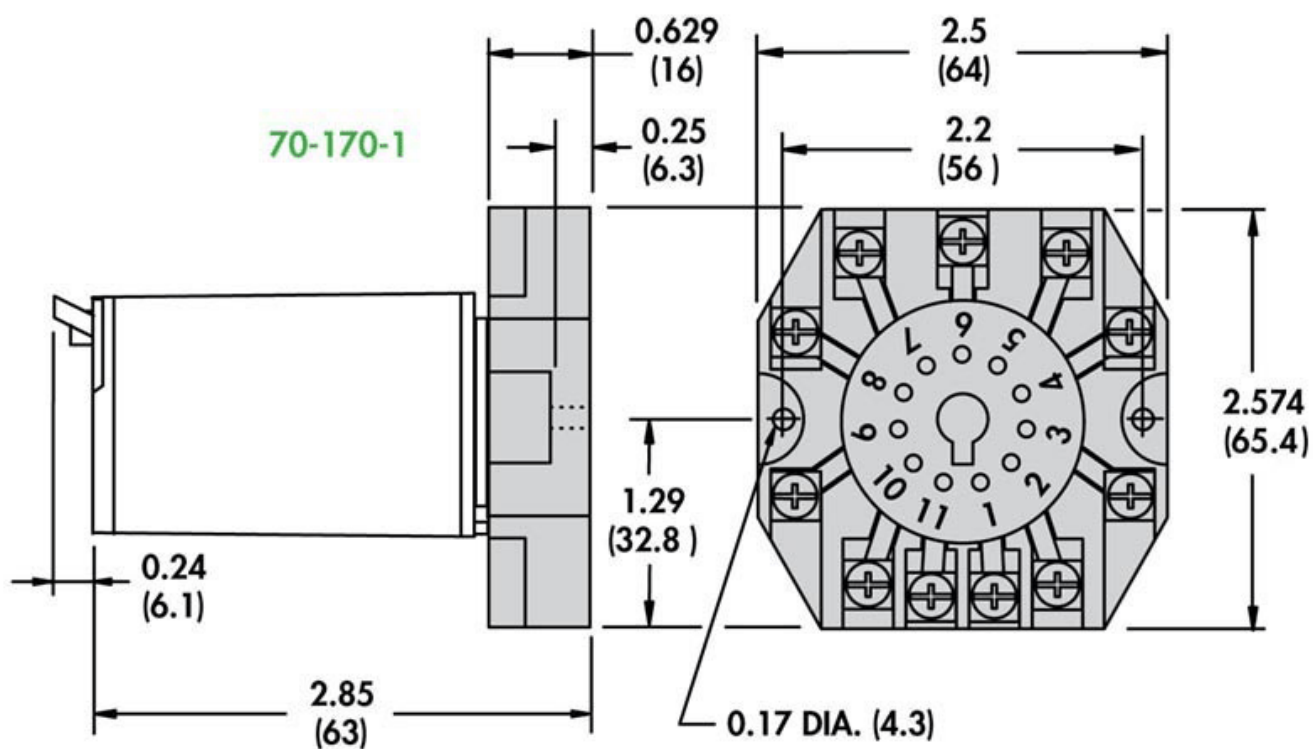|	
Category	21127-ZELIO ICE CUBE RELAYS
Discount Schedule	CP2
GTIN	3606480277788
Returnability	No

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.70 in (1.78 cm)
Package 1 Width	2.60 in (6.6 cm)
Package 1 Length	2.50 in (6.35 cm)
Package 1 Weight	0.15 lb(US) (0.07 kg)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Life Is On | Schneider Electric

Approximate Dimensions

70-170-1

0.629
(16)

0.25
(6.3)

2.5
(64)

2.2
(56)

2.574
(65.4)

1.29
(32.8)

0.24
(6.1)

2.85
(63)

0.17 DIA. (4.3)

Connections and Wiring Diagrams

24 21 22
7 6 5

32 12
8 7 6 5 4

8 4
9 3

10 2
9 11 1 3
34 14

10 11 1 2
A2 31 11 A1
INPUT INPUT

NEMA
IEC

Life Is On | Schneider Electric