SSR230DIN-DC22

Solid state relay, Harmony SE Relays, SPST, panel and DIN rail mount, SCR, AC zero cross, 22mm, 30A, 24...280V AC, 4...32V DC, 1NO





Main

Range	Legacy
Product Type	Solid state relay
Maximum output current	30 A
Mounting Support	Panel DIN rail
Network Number of Phases	1 phase
Output Voltage	24280 V AC

Complementary

812 mA at 32 V DC typical
SPST
NO
0.60.7 N.m for input 0.60.7 N.m for output
Input screw AWG 10) Output screw AWG 10)
For input status 1 LED (green)
4 V DC turn-on 1 V DC turn-off
SCR output Zero voltage switching
600 V
1200 A 16.6 ms
<1.6 V on-state
6000 A².s 8.3 ms
10 mA at off-state
500 V/µs off-state maximum
8.33 ms (turn-on, turn-off)
3.85 in (97.7 mm)
0.88 in (22.4 mm)
3.15 in (80 mm)
9.88 oz (280 g)

Environment

Product Certifications	CSA CE
Ambient Air Temperature for Operation	-40176 °F (-4080 °C)
Ambient Air Temperature for Storage	-40257 °F (-40125 °C)

Ordering and shipping details

21127-ZELIO ICE CUBE RELAYS
CP2
3606480282812
Yes
MX

Packing Units


3		
Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	3.53 in (8.97 cm)	
Package 1 Width	0.88 in (2.24 cm)	
Package 1 Length	3.85 in (9.77 cm)	
Package 1 Weight	9.59 oz (272.0 g)	

Offer Sustainability

WARNING: This product can expose you to chemicals including: Lead and	
lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov	
☑ REACh Declaration	
Pro-active compliance (Product out of EU RoHS legal scope)	
Yes	
☑ China RoHS Declaration	
₽¥Yes	
Product Environmental Profile	
[™] End Of Life Information	
The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.	

SSR230DIN-DC22

Approximate Dimensions

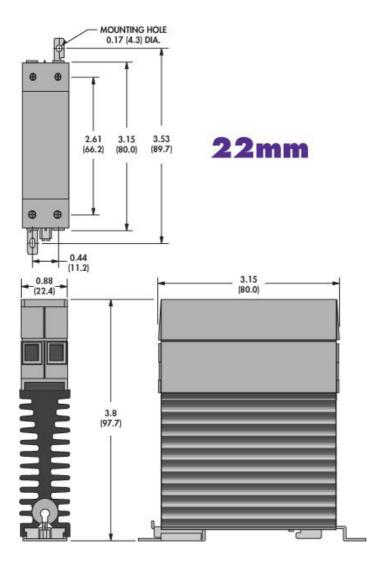

Connections and Wiring Diagrams

