# SSR630DIN-DC22

Solid state relay, Harmony SE Relays, SPST, panel and DIN rail mount, SCR, AC zero cross, 22mm, 30A, 48...660V AC, 4...32V DC, 1NO





#### Main

Range	Legacy
Product Type	Solid state relay
Maximum output current	30 A
Mounting Support	Panel DIN rail
Network Number of Phases	1 phase
Output Voltage	48660 V AC

Complementary

Complementary		
Input Current Limits	812 mA at 32 V DC typical	
Switch Function	SPST	
Contacts Type and Composition	NO	
Tightening Torque	0.60.7 N.m for input 0.60.7 N.m for output	
Connections Terminals	Input screw AWG 10) Output screw AWG 10)	
Local Signalling	For input status 1 LED (green)	
Switching Voltage	4 V DC turn-on 1 V DC turn-off	
Switching Device	SCR output Zero voltage switching	
Maximum Peak Voltage	1200 V	
Surge Current	1200 A 16.6 ms	
Voltage Drop	<1.6 V on-state	
Maximum I²t for fusing	6000 A <sup>2</sup> .s 8.3 ms	
Leakage Current	1 mA at off-state	
DV/dt	500 V/µs off-state maximum	
Response Time	8.33 ms (turn-on, turn-off)	
Height	3.85 in (97.7 mm)	
Width	0.88 in (22.4 mm)	
Depth	3.15 in (80 mm)	
Product Weight	9.88 oz (280 g)	
	·	

#### Environment

Product Certifications	CSA CE
Ambient Air Temperature for Operation	-40176 °F (-4080 °C)
Ambient Air Temperature for Storage	-40257 °F (-40125 °C)

## Ordering and shipping details

Category	21127-ZELIO ICE CUBE RELAYS
Discount Schedule	CP2
GTIN	3606480282928
Returnability	Yes
Country of origin	MX


## Packing Units

3		
Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	4.40 in (11.18 cm)	
Package 1 Width	1.20 in (3.05 cm)	
Package 1 Length	4.40 in (11.18 cm)	
Package 1 Weight	0.64 lb(US) (0.29 kg)	

#### Offer Sustainability

ng: Nickel cancer, and alifornia to mation go to
EU RoHS
lowing specific

## **Approximate Dimensions**

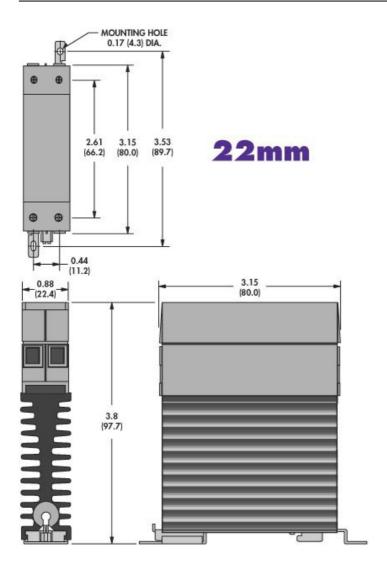

## Connections and Wiring Diagrams

