8536SCO3V07

NEMA Motor Starter, Type S, nonreversing, Size 1, 27A, 10 HP at 460 VAC, 5 kA SCCR, 3 phase, 3 pole, melting alloy, 600 VAC coil, open



Main

Product Type	Motor starter
Product Range	S
Starter Type	Non reversing

Complementary

o o mpromornary		
NEMA Size	1	
Rated Current	27 A	
Number of Poles	3P	
Maximum Voltage Rating	600 V AC	
Phase	3 phase	
Type of Overload	Melting alloy 3	
Horsepower Rating	7.5 HP 200 V AC 7.5 HP 230 V AC 10 HP 460 V AC 10 HP 575 V AC	
SCCR	Circuit-breaker: 5 kA at 600 V AC Fuse: 5 kA at 600 V AC	
Coil Voltage	550 V AC 50 Hz 600 V AC 60 Hz	
Control Circuit Type	Common control circuit	
Control Units	No control units	
Pilot Light	Without pilot light	
Auxiliary Contacts	Without	
Terminal Type	Screw clamp terminals	
Height	6.81 in (172.96 mm)	
Width	3.50 in (88.90 mm)	
Depth	4.22 in (107.19 mm)	

Environment

Enclosure Type	Not rated (open device)
Certifications	UL Listed CSA NEMA

Ordering and shipping details

Category	21192 - 8502,36 SC,SD(NOT S*R,T,W)
Discount Schedule	CP1
GTIN	785901872207
Returnability	No
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.81 in (17.3 cm)
Package 1 Width	3.50 in (8.9 cm)
Package 1 Length	4.21 in (10.7 cm)
Package 1 Weight	4.08 lb(US) (1.851 kg)

Offer Sustainability


California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov	
REACh Regulation		
EU RoHS Directive	Not compliant	
China RoHS Regulation	☐ China RoHS Declaration	
PVC free	Yes	

Contractual warranty

Warranty	18 months

Approximate Dimensions and Clearance

Electrical Clearance / Wire Bending Space

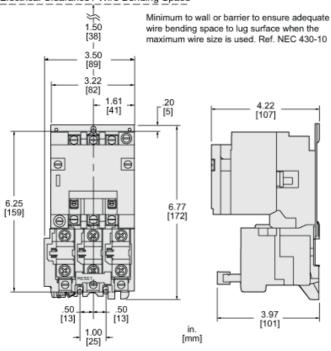

NEMA SIZE 1 STARTER 3-Pole Polyphase 600 VAC. 50-60 HZ

Coil Voltage	Voltage	
Code (*)	60 HZ	50 HZ
V01	24	_
V02	120	110
V08	208	_
V03	240	220
V06	480	440
V07	600	550
V99	Specify	Specify

 Catalog Number:
 8536SCO3(*)

 Weight:
 5 LB

 Wire Size:
 Power: #14-#8

 Control: #16-#12

 Terminal Torque:
 20 LB/IN

 Mounting Hwd.
 (3) #10 Screws