




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
XUN4ANANM12

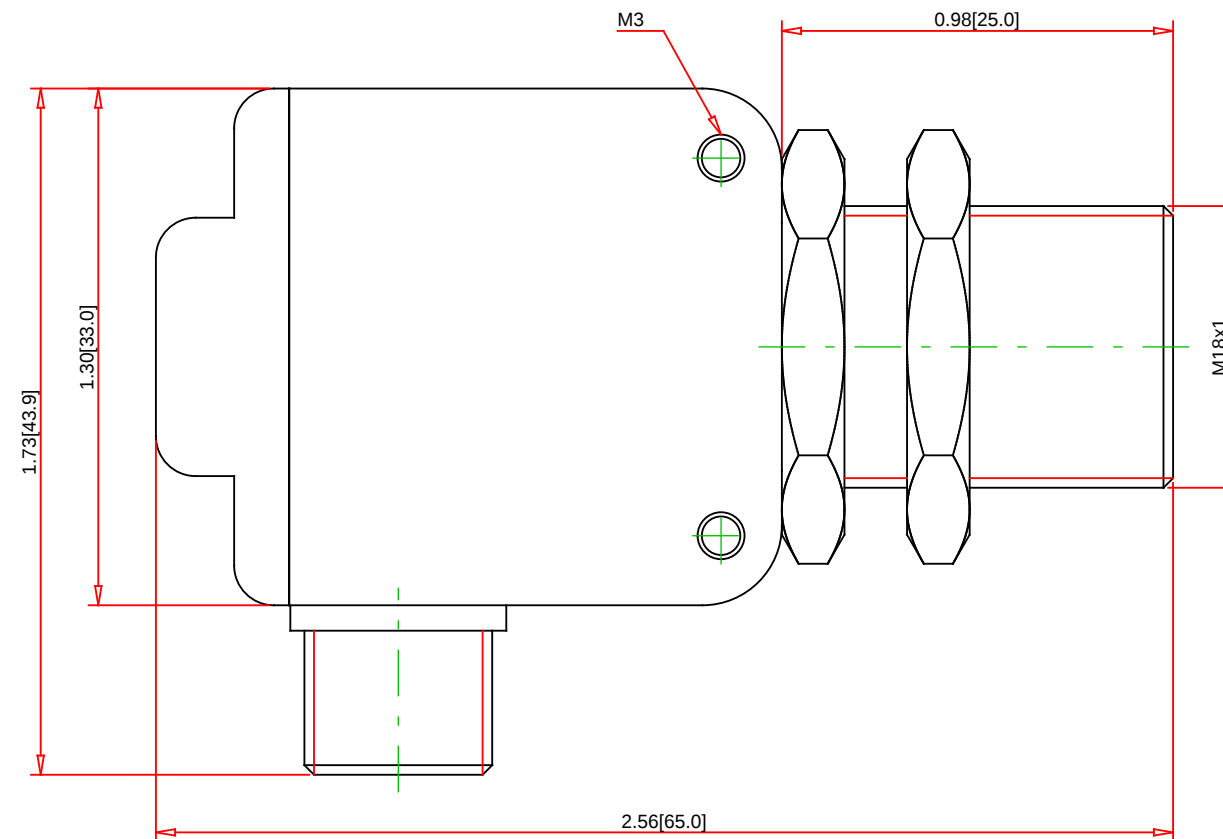

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Diffuse with Background Suppression:
Diffuse: 100.0 mm (3.9 in)
Polarized Retroreflective:
Thru Beam:
Retroreflective:
Circuit Type: NPN
Output Mode: Dark Operate
Power: DC
Voltage Range: 12-24 VDC
Max Load: 100 mA
Max Switching Frequency : 250 Hz
Temp Range: -25° to 55° C (-13° to 131° F)
NEMA Type: 4X (indoor use only)
IP Rating: 67
Standards: UL, CE Rohs

Specification:

Sensor Type: Proximity Diffuse - Short Range
Description: Photoelectric, Proximity Diffuse - Short Range, 18 mm Dual-Mount Snout, 12-24 VDC
Body Style: Dual-Mount Snout
Diameter:
Housing Material: Plastic - PBT
Face Material: PMMA
Adjustment: No
Cable Size:
Connector Type: 4-pin M12
Special Features: