

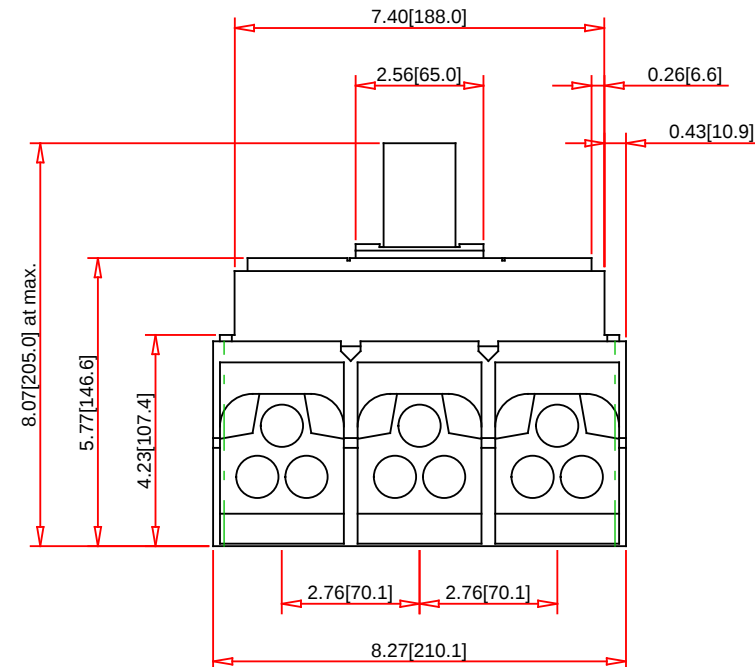


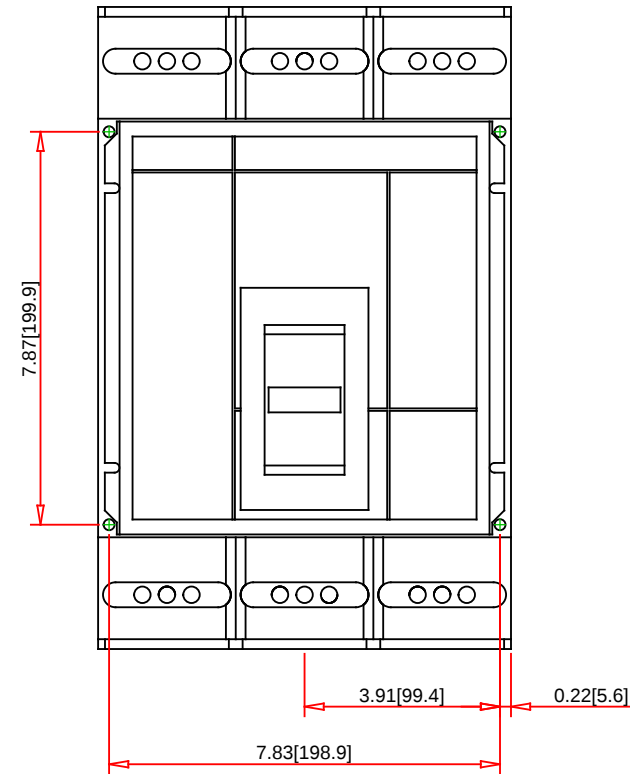

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

PGL36080CU43A

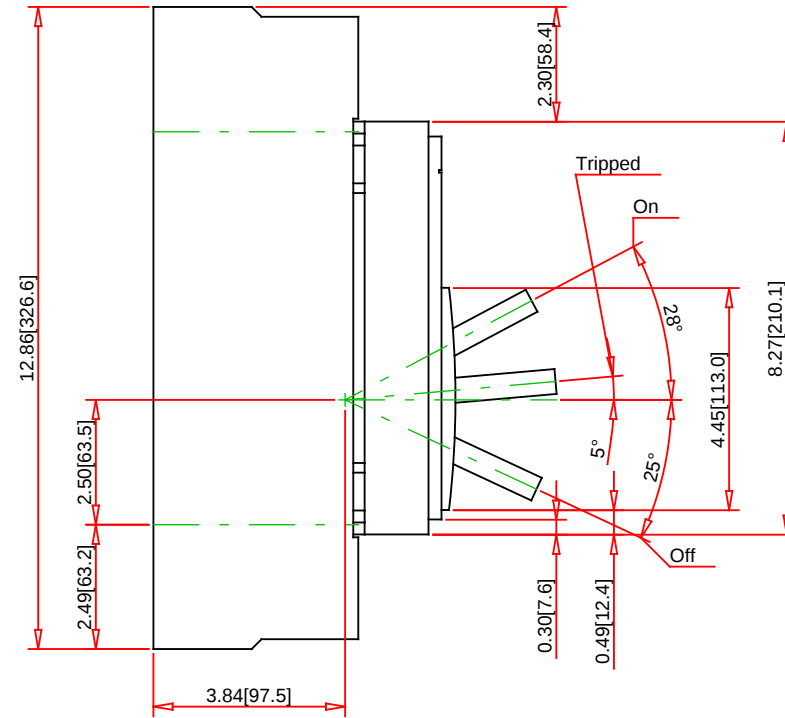

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

General Application: Provides overload and short circuit protection
For Use With: Panelboards and Switchboards
Approvals: UL Listed - CSA Certified - IEC Rated
Mounting Type: Unit Mount
Terminal Type: Lugs (ON and OFF ends)
Wire Size: #3/0-500 AWG/kcmil(Al/Cu)
Weight: 32 Pounds
Depth: 8.07 Inches
Height: 12.86 Inches
Width: 8.27 Inches

Description: PowerPact P-frame Electronic Trip Circuit Breaker
Number of Poles: 3-Pole
Sensor Rating: 800A
Voltage Rating: 600VAC
Interrupting Rating: 65kA at 240VAC - 35kA at 480VAC - 18kA at 600VAC
Circuit Breaker Rating: 100% Rated
Electronic Trip Unit: Micrologic Ammeter Trip Unit (5.0A)
Trip Function: LSI
Installed Rating Plug: Type A
Rating Plug Range: 0.4A to 1A

Specification: