

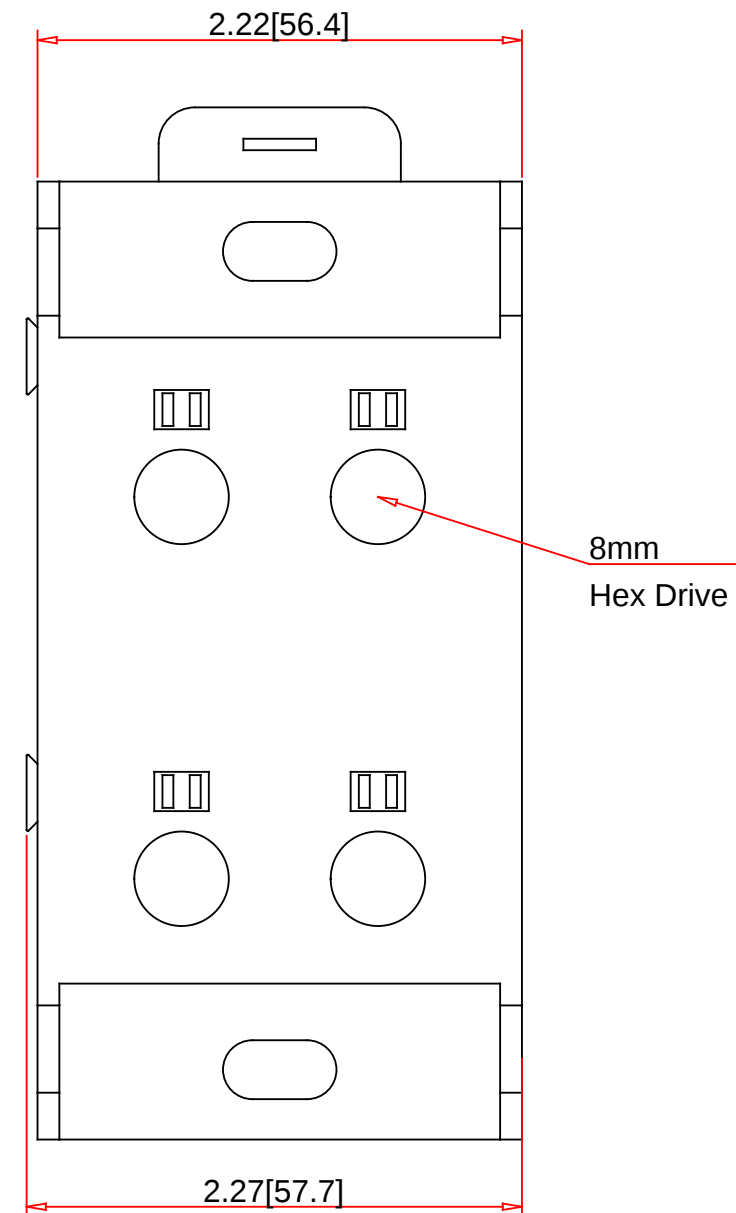


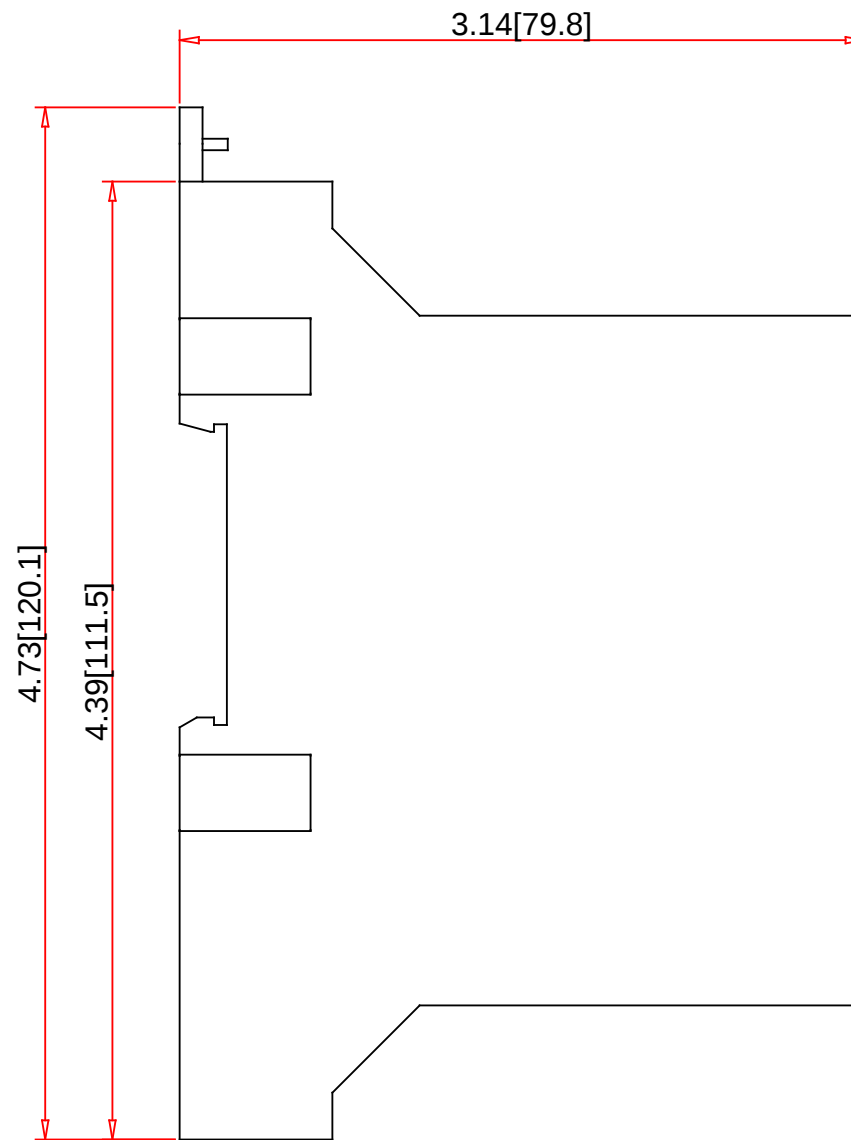

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
NSYEBCD25622



Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Type Wire:	Copper Wire
Weight (lb):	1.97
Terminal Screw Driver Line Side:	8 mm Hex
Terminal Screw Driver Load Side:	8 mm Hex
UL Listed:	N/A
UL Recognized:	E60616 XCFR2
CSA File:	File 70361, Class 6228-01 (With wire classes B&C)
RoHS:	Yes
CE Marked:	Yes
IP20 Touch Protection from the Front	Yes
Flammability Rating:	UL 94 V0

Description:	Enclosed Power Distribution Block
Mounting:	35 mm DIN rail
Ampere Rating:	510 Amps CU
Max. Voltage Rating:	600V AC/DC
Terminal Material:	Tin Plated Copper
Wire Range - Line Side AWG/kcmil:	6 - 250 CU
Wire Range - Load Side AWG/kcmil:	6 - 250 CU
Short Circuit Current Ratings with Fuses:	10kA