

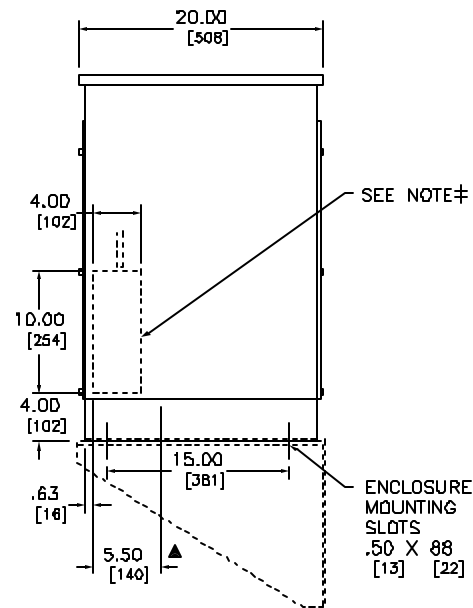


DRY-TYPE DRIVE ISOLATION TRANSFORMERS
34-40 KVA 3Ø 60HZ
480V DELTA PRIMARY

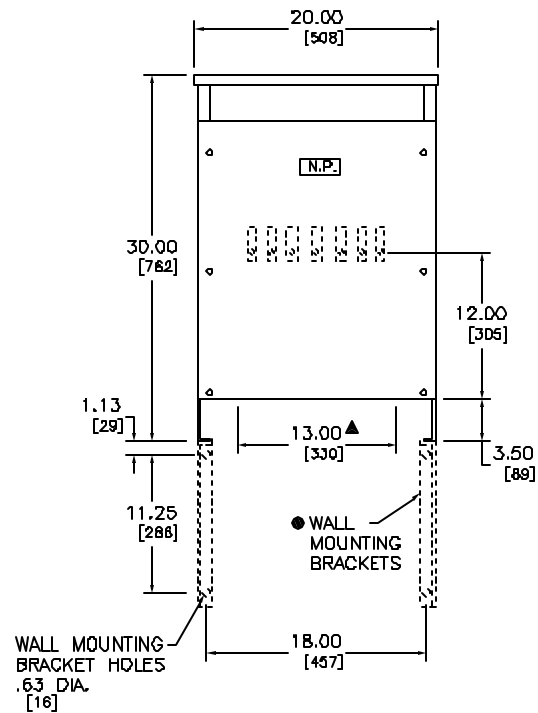

IN EACH PHASE CONNECT TO TAP	
PRIMARY VOLTS	1-5% FCAN 1-5% FCBN
483	1
480	2
437	3

- NOTES:
UL LISTED
NEMA 2 VENTILATED ENCLOSURE
MINIMUM CLEARANCE OF 8.00 IN/152 MM MUST BE MAINTAINED
BETWEEN VENT OPENINGS AND OTHER OBSTRUCTIONS.
ALUMINUM WOUND
USE WEATHERSHIELD CAT WS363 FOR NEMA 3R OUTDOOR USE
220°C INSULATION SYSTEM FOR 150°C RISE
● WALL MOUNTING BRACKET WMB363-384
▲ SPACE AVAILABLE IN BOTTOM FOR CUSTOMERS CONDUIT ENTRANCE.
‡ SPACE AVAILABLE ON BOTH ENDS FOR CUSTOMERS CONDUIT.

DRY-TYPE DRIVE ISOLATION TRANSFORMERS
34-40 KVA 3Ø 60HZ
480V DELTA PRIMARY

DUAL DIMENSIONS: INCHES MILLIMETERS					
KVA	CATALOG NUMBER		QUAR. SOUND LEVEL	WGT. LBS	AVG % Z
	230Y SECONDARY	480Y SECONDARY			
34	34T144HDIT	34T145HDIT	45 DB	295	6.3
40	40T144HDIT	40T145HDIT	45 DB	350	5.7



DWG# 3685
ND.