


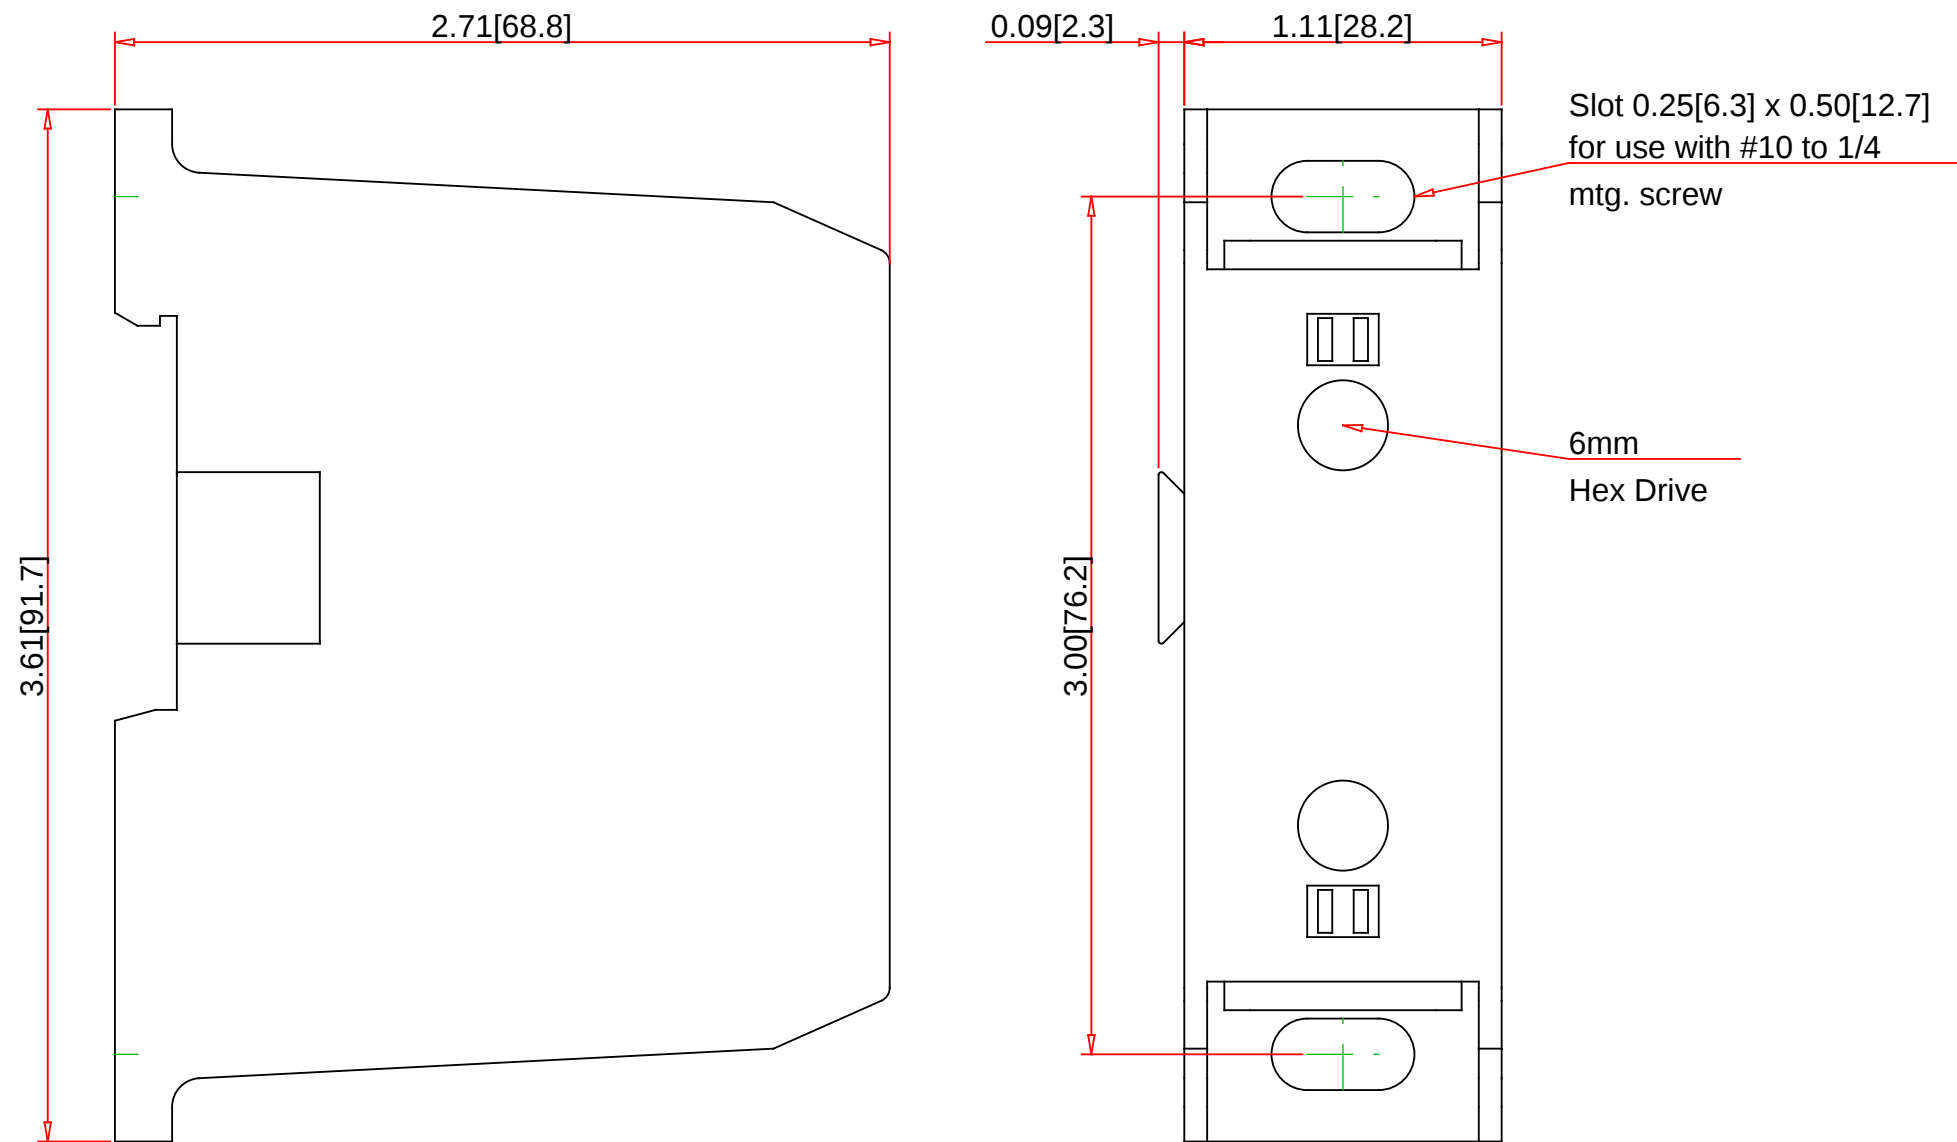

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
NSYEBCP12611

Schneider Electric
Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Type Wire: Copper Wire
Weight (lb): 0.55
Terminal Screw Driver Line Side: 6 mm Hex
Terminal Screw Driver Load Side: 6 mm Hex
UL Listed: E323110 QPQS
UL Recognized: N/A
CSA File: File 70361, Class 6228-01 (With wire classes B&C)
RoHS: Yes
CE Marked: Yes
IP20 Touch Protection from the Front: Yes
Flammability Rating: UL 94 V0

Description:
Mounting: Enclosed Power Distribution Block
Ampere Rating: Panel
Max. Voltage Rating: 200 Amps CU
Terminal Material: 600V AC/DC
Wire Range - Line Side AWG/kcmil: Tin Plated Copper
Wire Range - Load Side AWG/kcmil: 14 - 3/0 CU
Short Circuit Current Ratings with Fuses: 14 - 3/0 CU
Up to 100kA