
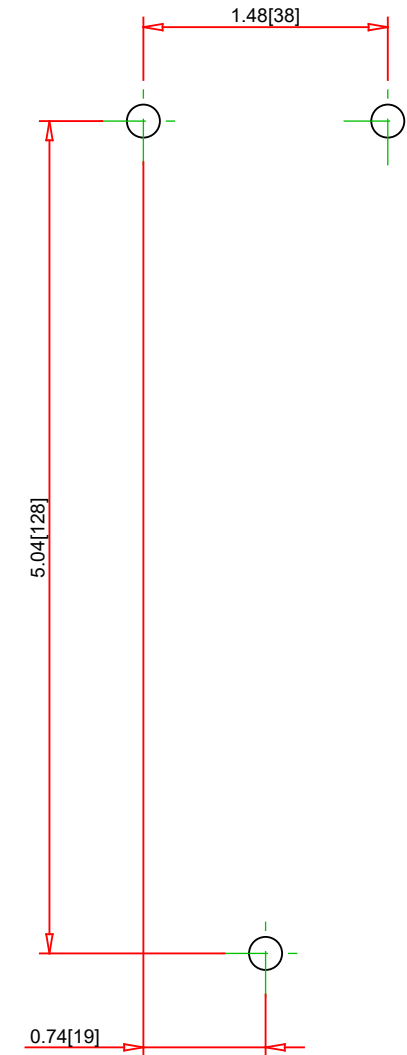
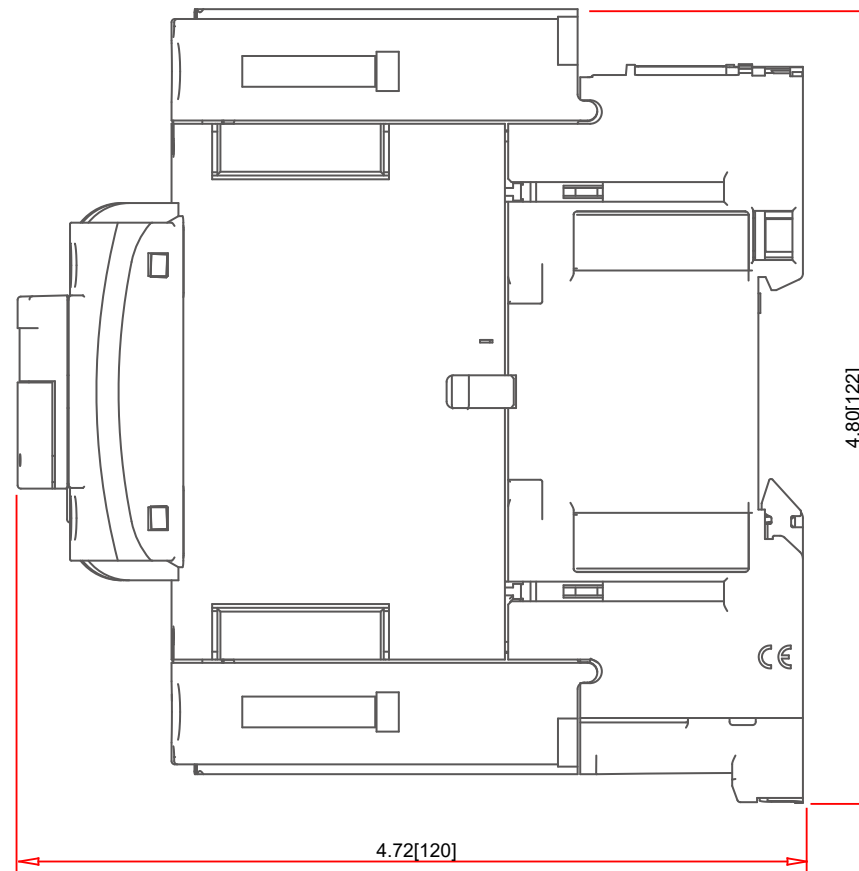



in [mm]

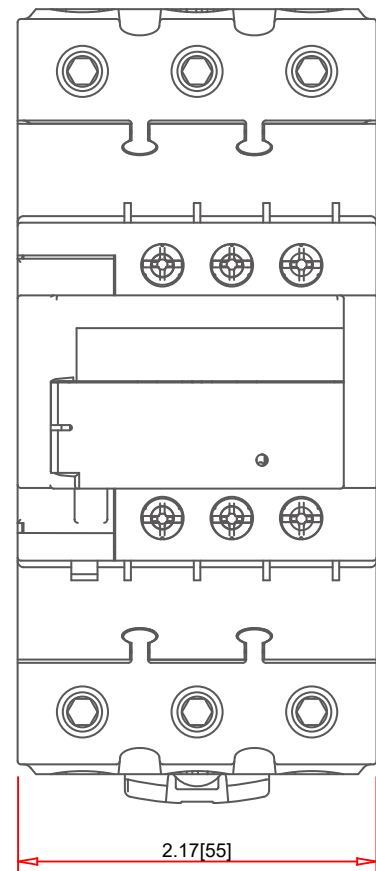

Note:
 - Drawings Not To Scale
 - Drawings Subject to Change Without Notice
 - Dimensions are inches next to [Millimeters]

Part No.:

LC1D40ABNE



Schneider Electric United States
 North American Division
 Boston One Campus
 800 Federal Street
 Andover, MA 01810, USA
 Phone: +1 8773425173
 Email: CCC@us.schneider-electric.com

Technical Information:

Rating: 600 V / 40 A
 UL File/CCN: E164862 / NLDX
 CSA File: LR43364 3211 04
 Meets Standards: IEC 60647-4-1
 Weight: 2.29 lb (0.855 kg)
 Termination Method: Screw Clamp
 Wire Size: Power: #2 - #16 AWG
 Control: #12 - #20 AWG
 Terminal torque: Power: 70 lb-in (8 Nm)
 Control: 8 lb-in (0.9 Nm)
 Mounting Hwd.: 35mm DIN Rail, #8 screw

Specification:

Description: TeSys D IEC Contactor New Type with Everlink® - 40 A - AC/DC Coil
 Type: TeSys D IEC Contactor - 40 A-24-60 VAC/DC
 Voltages Code: BNE at 24-60 VAC/DC

Coil Consumption: 16 VA
 1 VA

Single Phase		Three Phase			
115 V	230 V	200 V	230 V	460 V	575 V
3 HP	5 HP	10 HP	10 HP	30 HP	30 HP