
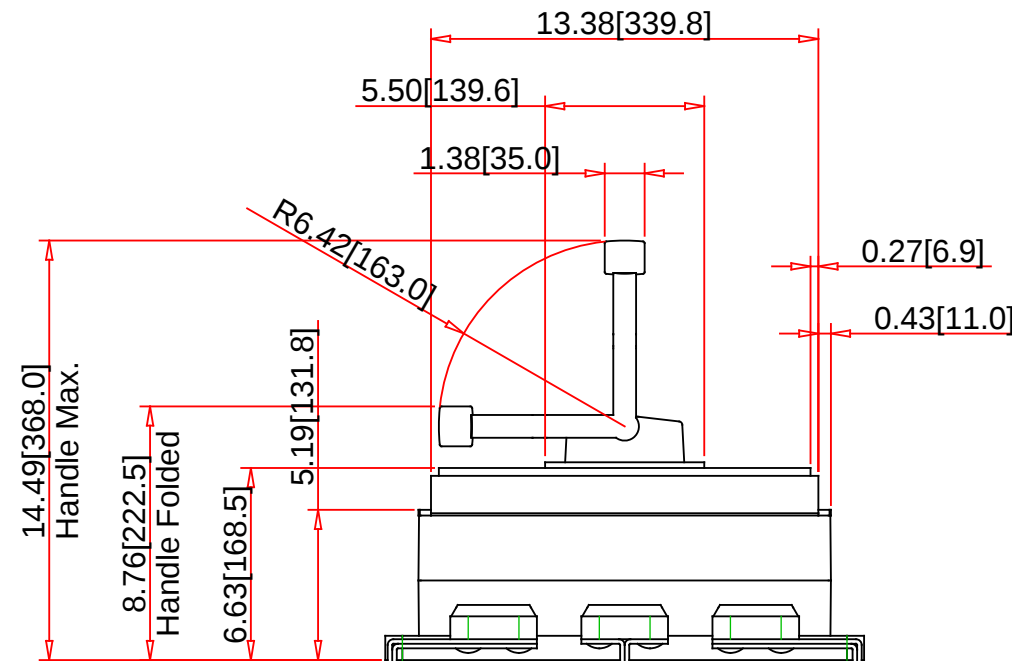
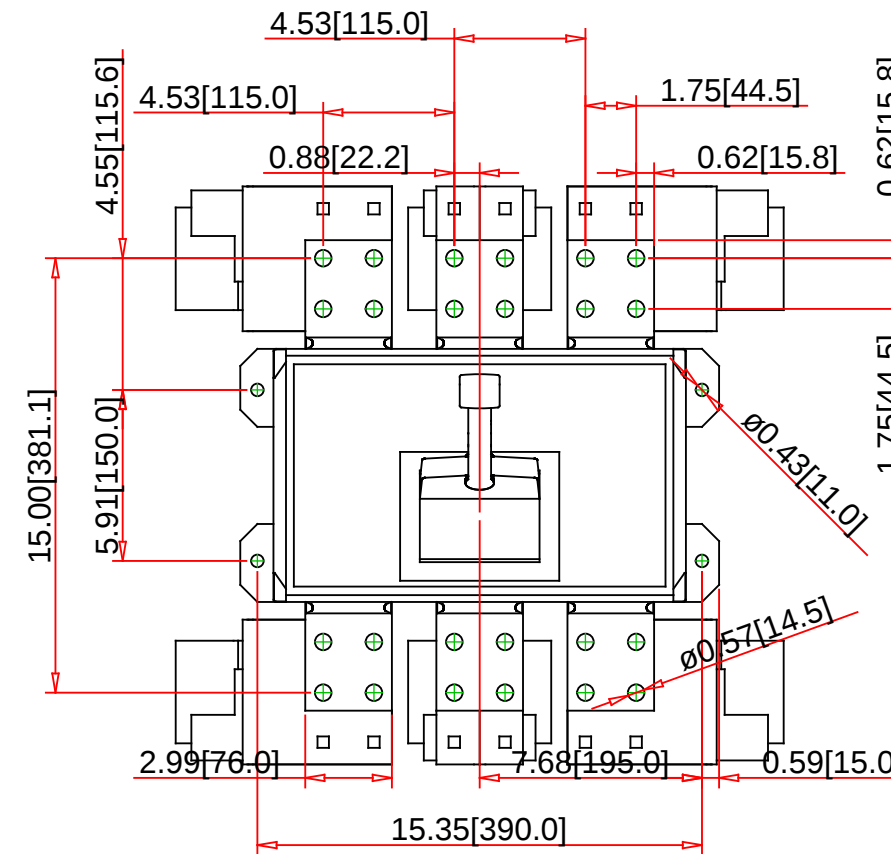


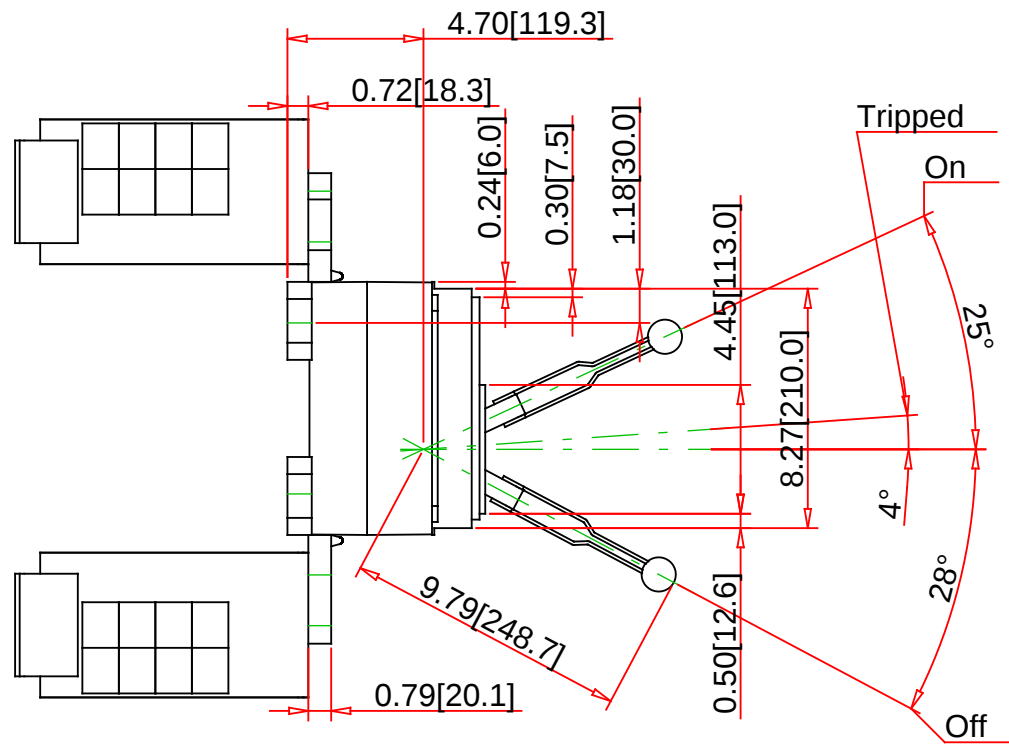

Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

RLF36250U33A

SQUARE D

by Schneider Electric

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Technical Information:

General Application:	Provides overload and short circuit protection
For Use With:	Industrial Enclosures and Switchboards
Approvals:	UL Listed - CSA Certified - IEC Rated
Mounting Type:	Unit Mount
Terminal Type:	Bus Connection - Line: terminal - Load: terminal
Wire Size:	
Weight:	52
Depth:	14.49
Height:	16.24
Width:	16.53
Mounting Height:	

Description:

Number of Poles:
Ampere Rating:
Voltage Rating:
Interrupting Rating:
Circuit Breaker Rating:
Fixed AC Magnetic Trip:

PowerPact R-frame Molded Case Circuit Breaker

3-Pole
2500A
600VAC
125kA at 240VAC - 100kA at 480VAC - 50kA at 600VAC
80% Rated

Specification: