


NEMA TYPE 12
NO KNOCKOUTS

NOTES:
FINISH - NEMA TYPE 12 GRAY BAKED ENAMEL
UL LISTED - FILE E-154828
ALL NEUTRALS - INSULATED GROUNDABLE
NOT SUITABLE FOR USE AS SERVICE EQUIPMENT
SHORT CIRCUIT CURRENT RATINGS:

10,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS H OR K FUSES.
200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS R FUSES HAVING
CLASS R REJECTION KITS INSTALLED OR CLASS J FUSES.

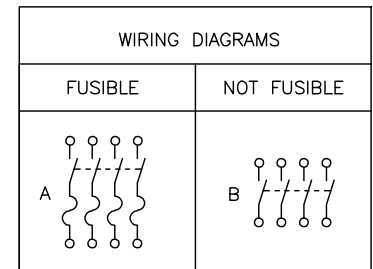

TERMINAL LUG DATA			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
400	(1) 600 KCMIL	(1) #1/0 AWG	AL/CU
	OR (2) 300 KCMIL	OR (2) #1/0 AWG	

SEISMIC NOTES:
USE (4) 3/8" DIA GRADE 5 STEEL MOUNTING BOLTS @ HOLES AA
MAX CONFIGURED WEIGHT 155 LB FOR THE PURPOSE OF DETERMINING
SEISMIC ANCHORAGE REQUIREMENTS. FOR ALL OTHER APPLICATIONS,
CONTACT SCHNEIDER ELECTRIC.

DUAL DIMENSIONS: INCHES
MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG.	HORSEPOWER RATINGS									
			240VAC		480VAC		600VAC		250 VDC		600 VDC	
			STD	MAX	STD	MAX	STD	MAX	STD	MAX	STD	MAX
H465AWK	600VAC, 600VDC	A	10	30	10	30	10	30	10	30	50	50
HU465AWK	600VAC, 600VDC	B	-	50	-	125	-	250	-	125	350	50

HEAVY DUTY SAFETY SWITCHES
VISIBLE BLADE TYPE
400 AMPERE
ENCLOSURE - NEMA TYPE 12



DWG# 1920S
NO.