






DRAWING GUIDE - Smart - UPS Li-Ion

Component /Detail	Description
Draw ing Guide	Smart-UPS Li-Ion, Short Depth SMTL1500RM3UC 120VAC Draw ing Guide
UPS Isometric View	Smart-UPS Li-Ion, Short Depth SMTL1500RM3UC 120VAC UPS Isometric View
UPS General Arrangement	Smart-UPS Li-Ion, Short Depth SMTL1500RM3UC 120VAC UPS General Arrangement
UPS Rear View	Smart-UPS Li-Ion, Short Depth SMTL1500RM3UC 120VAC UPS Rear View
System One Line Diagram	Smart-UPS Li-Ion, Short Depth SMTL1500RM3UC 120VAC System One Line Diagram

LEGEND			
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
	CIRCUIT BREAKER		DC-AC CONVERTER (INVERTER)
	RELAY		BATTERY
	GND		

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: APC Smart-UPS Li-Ion
 Input: 120VAC, (L+N+G), 50/60Hz, 1PH, NEMA 5-15P
 UPS Output: 120VAC, (L+N+G), 50/60Hz, 1PH, (6)NEMA 5-15R
 SHORT DEPTH 1500VA UPS WITH SmartConnect
 DRAWING GUIDE

PROJECT: DRAWINGS **SHEET** 1 OF 5

DWG NO: SMTL1500RM3UC

DRAWN BY: JAYAPRAKASH 12-MAR-18

ENGINEER: JIM BRIGGS 04-APR-18


APPROVED BY: JEFFREY AUGUST 04-APR-18

REV. 0

ANGLE


PROJECTION

N.A.

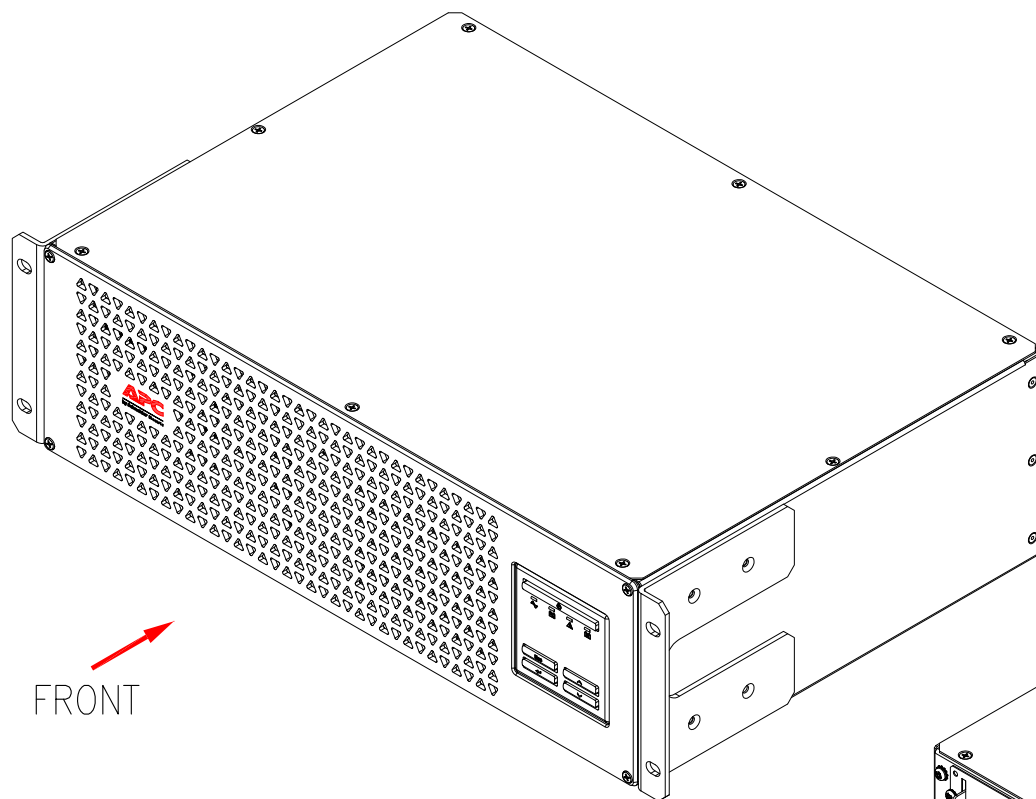

FRONT

UPS-ISOMETRIC VIEW

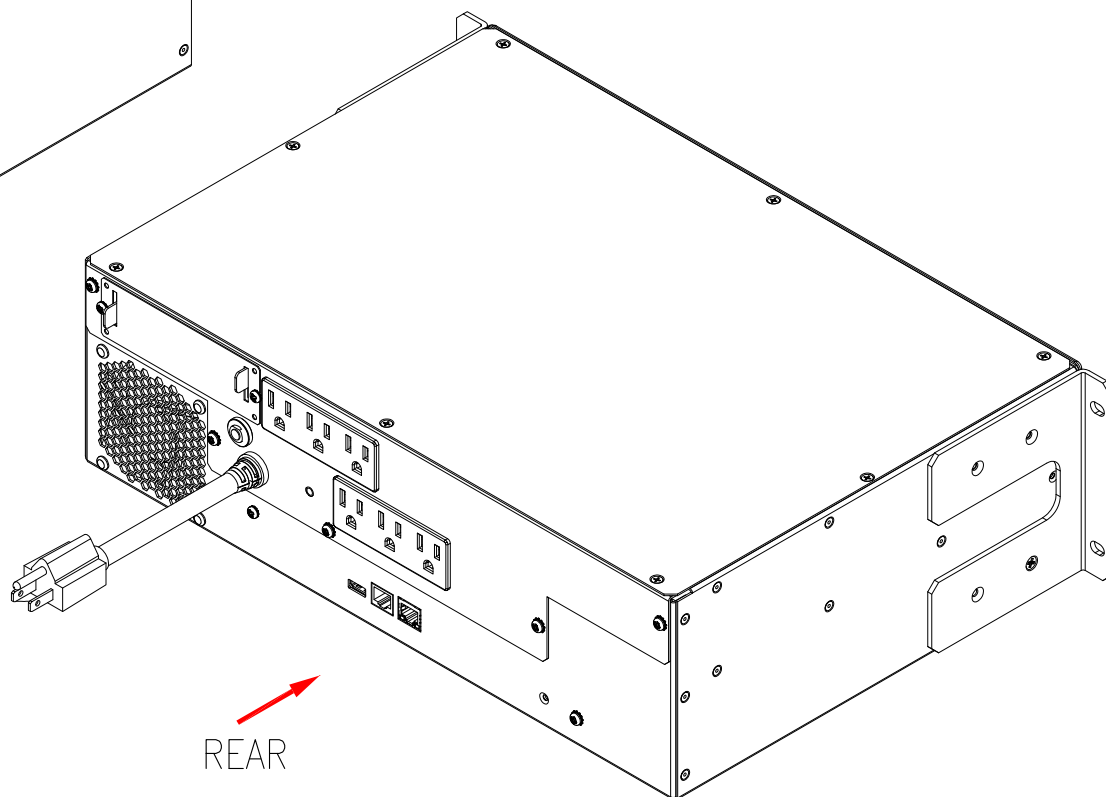

REAR

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Schneider
Electric

TITLE: APC Smart-UPS Li-Ion
Input: 120VAC, (L+N+G), 50/60Hz, 1PH, NEMA 5-15P
UPS Output: 120VAC, (L+N+G), 50/60Hz, 1PH, (6)NEMA 5-15R
SHORT DEPTH 1500VA UPS WITH SmartConnect
UPS-ISOMETRIC VIEW

PROJECT: DRAWINGS **SHEET** 2 OF 5

DWG NO: SMTL1500RM3UC

DRAWN BY: JAYAPRAKASH 12-MAR-18

ENGINEER: JIM BRIGGS 04-APR-18


APPROVED BY: JEFFREY AUGUST 04-APR-18

REV. 0


THIRD

ANGLE


PROJECTION

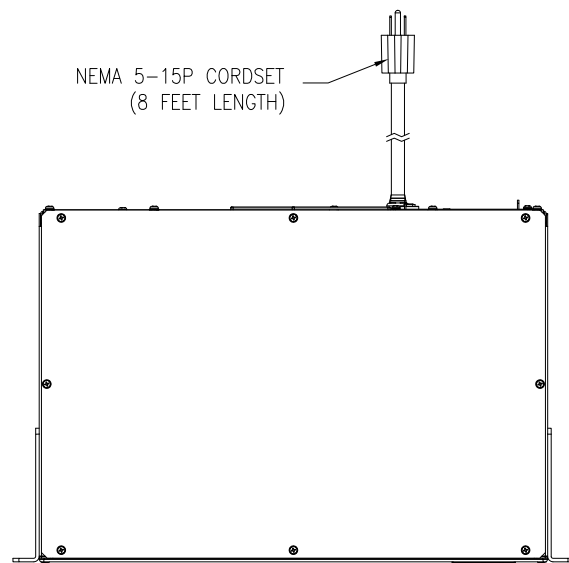


TOP VIEW

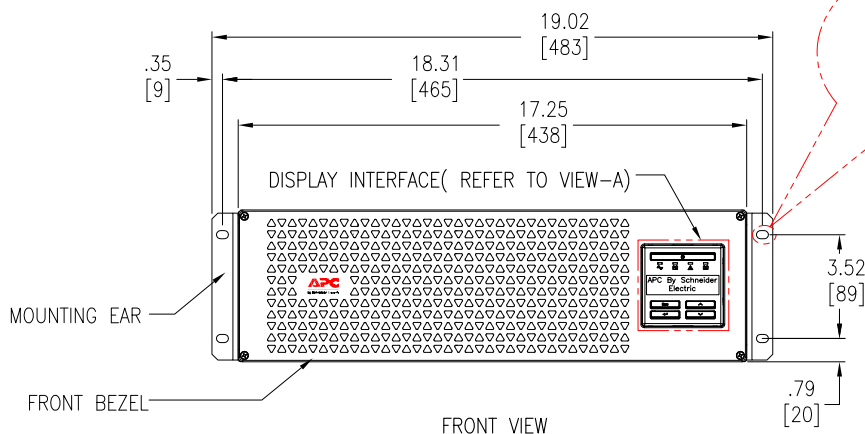

FRONT VIEW

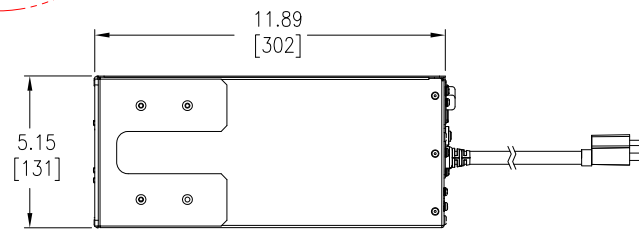


SIDE VIEW

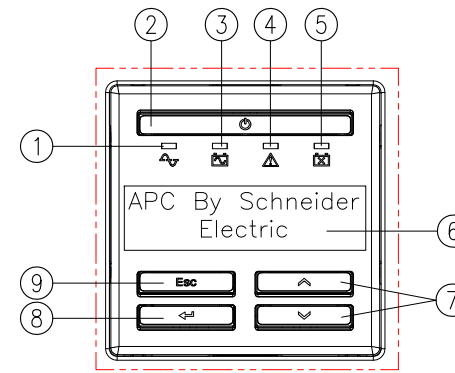

VIEW - A (ENLARGED VIEW)

1. Online Indicator LED.
2. Ups Output ON/OFF Button.
3. On Battery Indicator LED.
4. Error Detected LED
5. Replace Battery Indicator LED
6. Multi Lingual Display Screen
7. UP/DOWN Selection Arrows
8. ENTER Button
9. ESCAPE Button

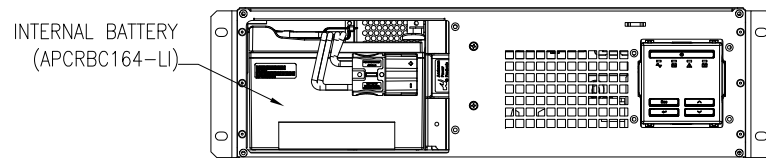

FRONT VIEW (INTERNAL)
(BEZEL REMOVED)

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
3. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
4. CABLE ENTRY IS FROM REAR OF UNIT.
5. WEIGHT OF UNIT IS 43 lb [19.5 kg].


THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Schneider
Electric

TITLE: APC Smart-UPS Li-Ion
Input: 120VAC, (L+N+G), 50/60Hz, 1PH, NEMA 5-15P
UPS Output: 120VAC, (L+N+G), 50/60Hz, 1PH, (6)NEMA 5-15R
SHORT DEPTH 1500VA UPS WITH SmartConnect
GENERAL ARRANGEMENT

PROJECT: DRAWINGS **SHEET** 3 OF 5

DWG NO: SMTL1500RM3UC	REV. 0
DRAWN BY: JAYAPRAKASH	12-MAR-18
ENGINEER: JIM BRIGGS	04-APR-18
APPROVED BY: JEFFREY AUGUST	04-APR-18
THIRD	ANGLE
PROJECTION	

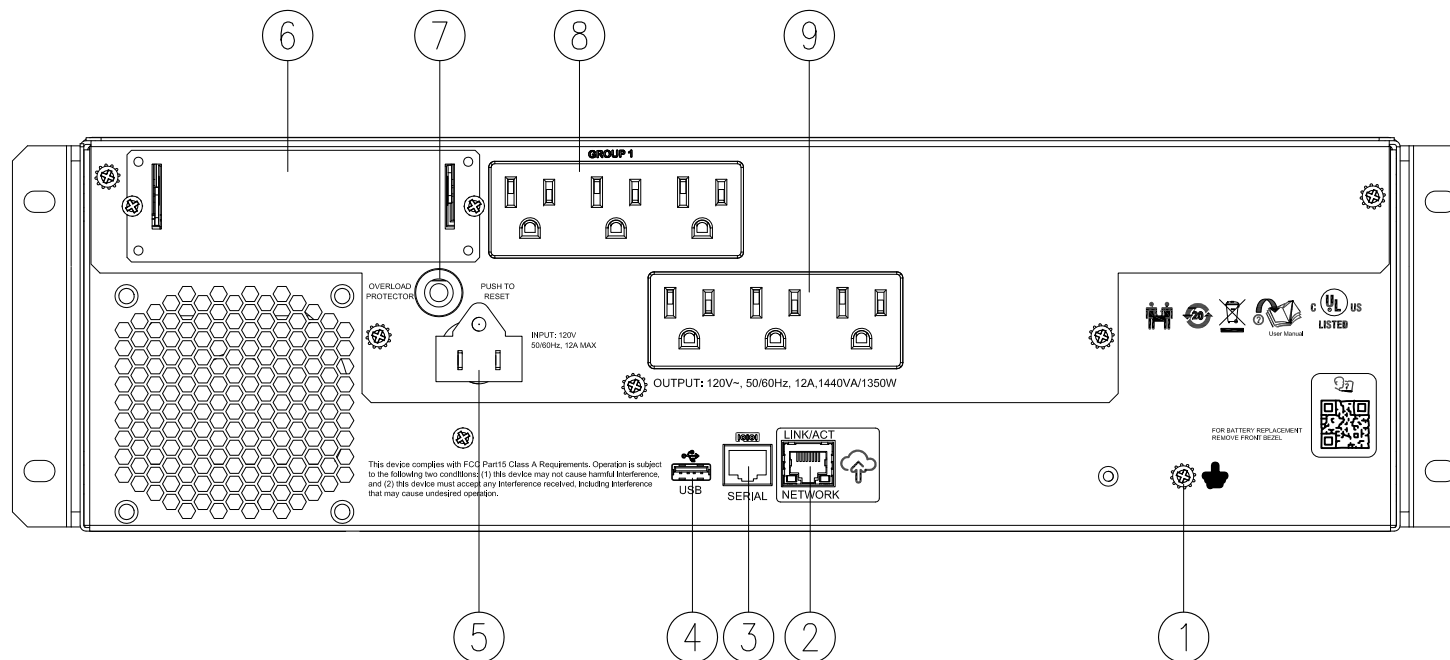

REAR VIEW (ENLARGED)

1. Chassis Ground Connection Screw.
2. APC SmartConnect Port.
3. Serial Port.
4. USB Port.
5. UPS Input (NEMA 5-15P Cordset).
6. Smart Slot
7. Input Circuit Breaker.
8. Controlled Outlet Group 1 – NEMA 5-15R Outlets x (3).
9. Main Outlet Group – NEMA 5-15R Outlets x (3).

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.


THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Schneider
Electric

TITLE: APC Smart-UPS Li-Ion
Input: 120VAC, (L+N+G), 50/60Hz, 1PH, NEMA 5-15P
UPS Output: 120VAC, (L+N+G), 50/60Hz, 1PH, (6)NEMA 5-15R
SHORT DEPTH 1500VA UPS WITH SmartConnect
REAR VIEW

PROJECT: DRAWINGS **SHEET** 4 OF 5

DWG NO: SMTL1500RM3UC	REV. 0
DRAWN BY: JAYAPRAKASH	12-MAR-18
ENGINEER: JIM BRIGGS	04-APR-18
APPROVED BY: JEFFREY AUGUST	04-APR-18
	THIRD ANGLE PROJECTION

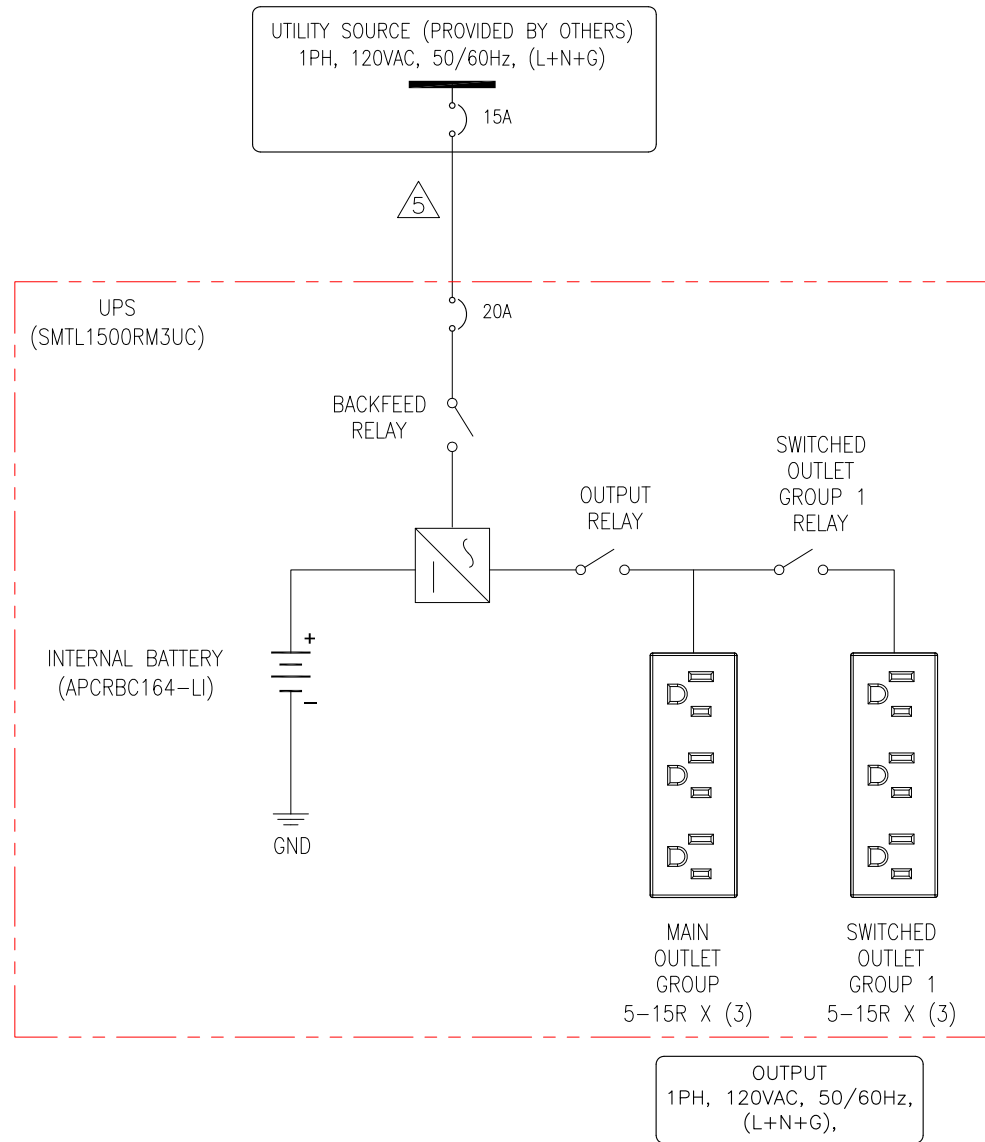

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. REFER TO PRODUCT DOCUMENTATION FOR ADDITIONAL DETAILS PRIOR TO INSTALLATION AND SITE PREPARATION WORK.
3. DRAWING DEPICTS POWER SYSTEM CONNECTIONS AND IS NOT REPRESENTATIVE OF PHYSICAL LAYOUT. PLEASE REFER TO MECHANICAL DRAWINGS FOR MORE SPECIFIC PHYSICAL DATA.
4. UTILITY SOURCE MUST BE 1PH, 120VAC (L+N+G), 50/60Hz PROVIDED BY OTHERS.
- △5. CORDSET 8 FEET, NEMA 5-15P IS PART OF UPS.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Schneider
Electric

TITLE: APC Smart-UPS Li-Ion
Input: 120VAC, (L+N+G), 50/60Hz, 1PH, NEMA 5-15P
UPS Output: 120VAC, (L+N+G), 50/60Hz, 1PH, (6)NEMA 5-15R
SHORT DEPTH 1500VA UPS WITH SmartConnect
SYSTEM ONLINE DIAGRAM

PROJECT: DRAWINGS **SHEET** 5 OF 5

DWG NO: SMTL1500RM3UC **REV.** 0

DRAWN BY: JAYAPRAKASH	12-MAR-18	ANGLE
ENGINEER: JIM BRIGGS	04-APR-18	PROJECTION
APPROVED BY: JEFFREY AUGUST	04-APR-18	N.A.