



51-75 KVA 3Ø 60HZ
460V DELTA PRIMARY

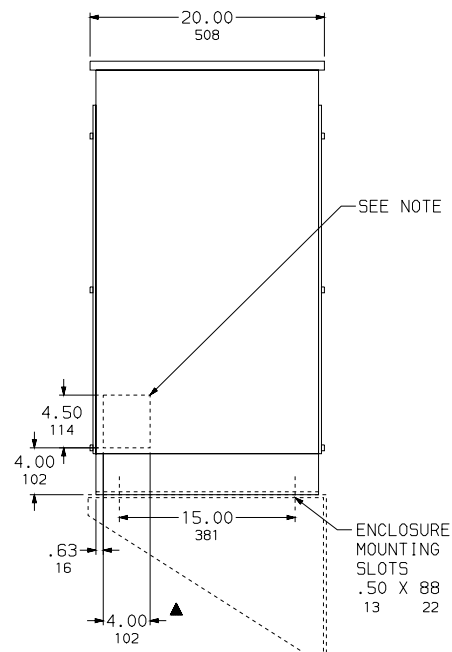

IN EACH PHASE CONNECT TO TAP	
PRIMARY VOLTS	1-5% FCAN 1-5% FCBN
483	1
460	2
437	3

DUAL DIMENSIONS: INCHES
MILLIMETERS

KVA	CATALOG NUMBER		GUAR. SOUND LEVEL	WGT. LBS	AVG % Z
	230V SECONDARY	460V SECONDARY			
51	51T144HD1T	51T145HD1T	50 DB	445	5.9
63	63T144HD1T	63T145HD1T	50 DB	465	6.5
75	75T144HD1T	75T145HD1T	50 DB	550	5.4

NOTES:
UL LISTED
NEMA 2 VENTILATED ENCLOSURE
MINIMUM CLEARANCE OF 6.00 IN/152 MM MUST BE MAINTAINED
BETWEEN VENT OPENINGS AND OTHER OBSTRUCTIONS.
ALUMINUM WOUND
USE WEATHERSHIELD CAT WS364 FOR NEMA 3R OUTDOOR USE
220°C INSULATION SYSTEM FOR 150°C RISE
● WALL MOUNTING BRACKETS MMB363-364
▲ SPACE AVAILABLE IN BOTTOM FOR CUSTOMERS CONDUIT ENTRANCE.
± SPACE AVAILABLE ON BOTH ENDS FOR CUSTOMERS CONDUIT.

51-75 KVA 3Ø 60HZ
460V DELTA PRIMARY



DWG. NO. 3686