


9080GT6  
Terminal block, Linergy, transient voltage  
suppressor, natural colored block, 120 VAC

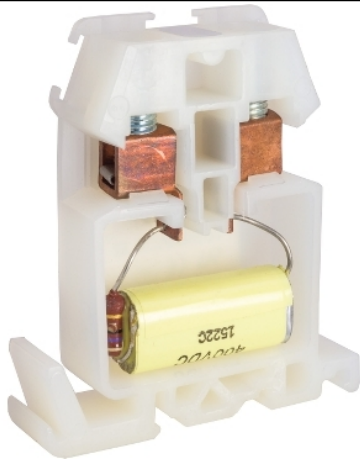

Main

Range of Product	9080G
Product Type	Terminal block
Localisation on Device	Transient voltage suppressor
Color	Natural
Quantity	Set of 5

Complementary

Voltage Rating	120 V AC
Wire Size	AWG 18...AWG 10 copper
Mounting Type	9080GH track 35 mm DIN rail
Certifications	UL recognized E60616 CCN XCFR2[RETURN]CSA file 62144 class 6228 01[RETURN]CE
Protection Type	Fingersafe DIN 57470
Electrical Connection	Copper box lugs
Material	Nylon: block
Ambient Air Temperature for Operation	-40...257 °F (-40...125 °C)
Electrical Connrection Tightening Torque	Lug copper 18...20 lbf.in (2.03...2.26 N.m) : AWG 18...AWG 10 copper)
Height	2.55 in (64.77 mm)
Width	2.16 in (54.86 mm)
Depth	0.5 in (12.70 mm)
Density	24 per foot
Compatible End Barrier	GT6B


Ordering and shipping details

Category	21702-9080 G (NOT GCB)
Discount Schedule	CP5
GTIN	785901652441
Returnability	Yes
Country of origin	MX

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the Schneider Electric group. It is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 <a href="#">Yes</a>
PVC free	Yes
<b>Contractual warranty</b>	
Warranty	18 months