

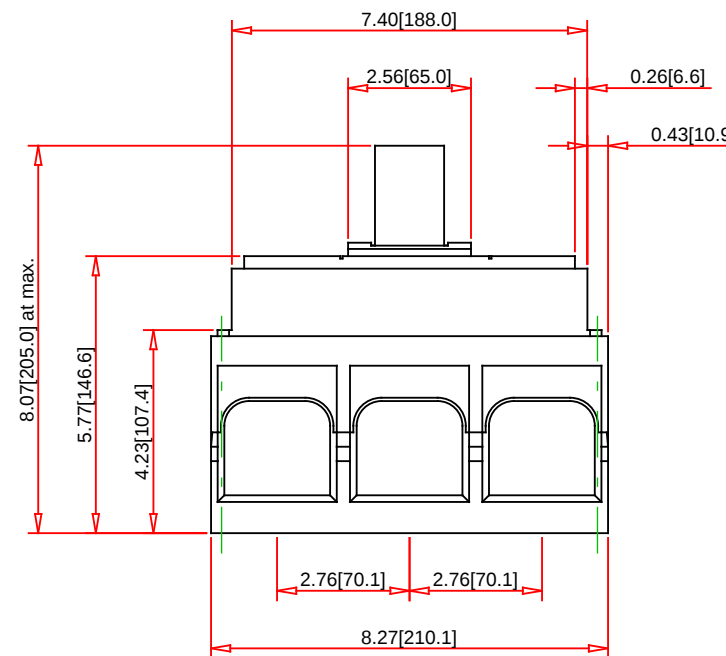
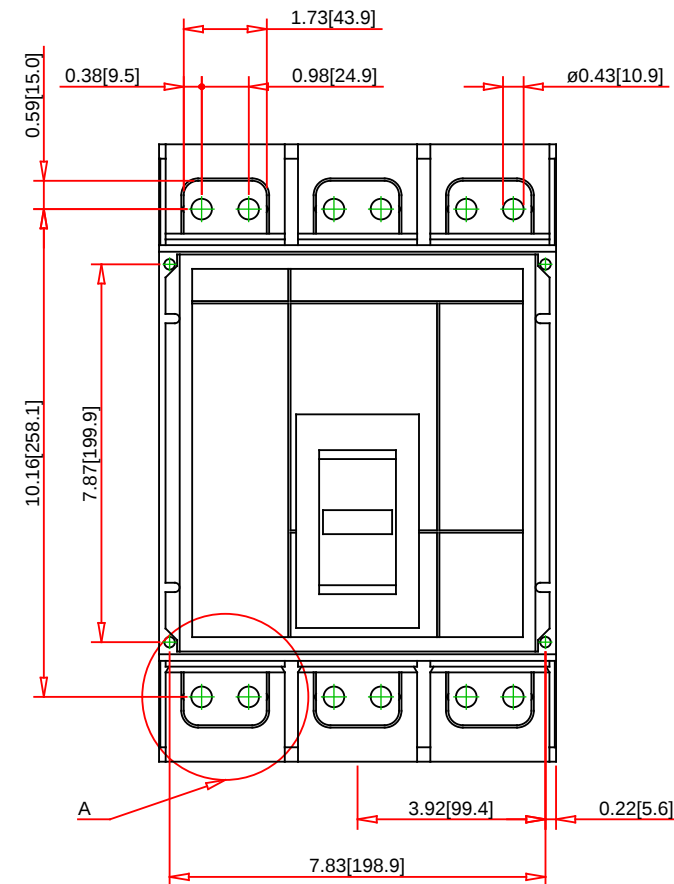


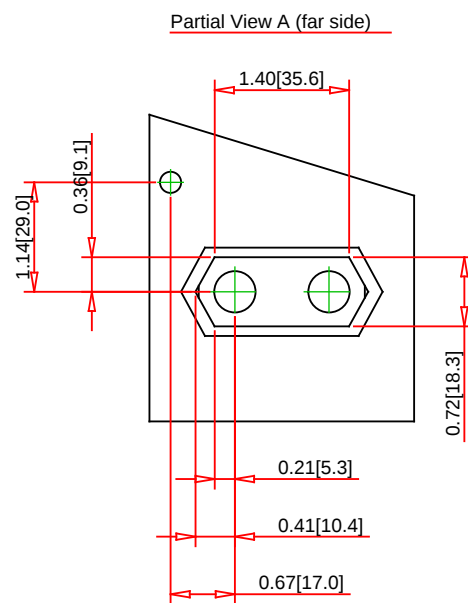

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
PKF36080CU43A

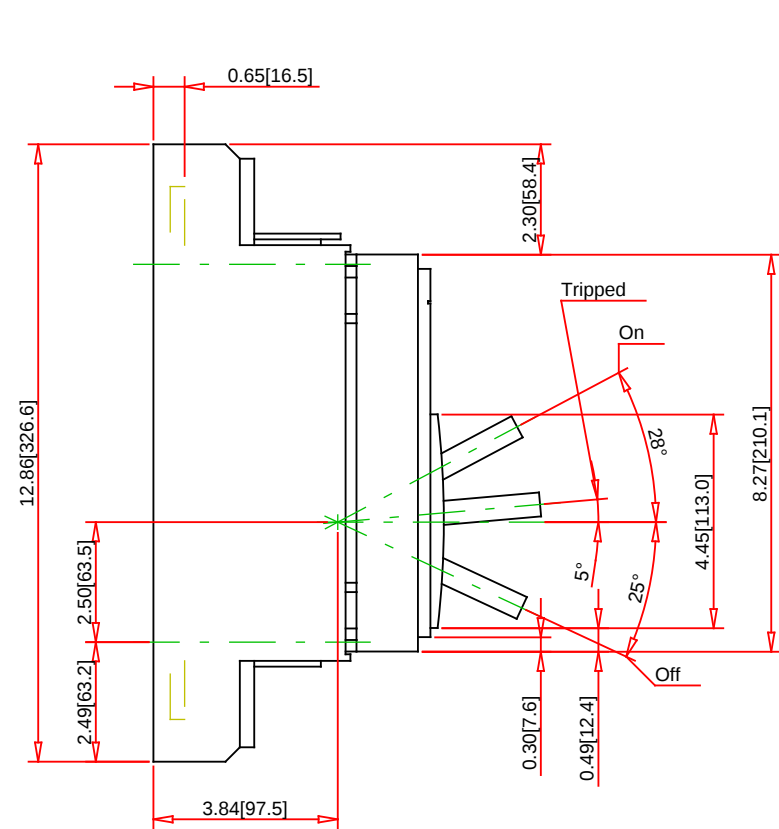

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

General Application:	Provides overload and short circuit protection
For Use With:	Panelboards and Switchboards
Approvals:	UL Listed - CSA Certified - IEC Rated
Mounting Type:	Unit Mount
Terminal Type:	No Lugs (Includes terminal nut kit for ON and OFF)
Wire Size:	#3/0-500 AWG/kcmil(Al/Cu)
Weight:	34 Pounds
Depth:	8.07 Inches
Height:	12.86 Inches
Width:	8.27 Inches

Specification:

Description:	PowerPact P-frame Electronic Trip Circuit Breaker
Number of Poles:	3-Pole
Sensor Rating:	800A
Voltage Rating:	600VAC
Interrupting Rating:	65kA at 240VAC - 50kA at 480/600VAC
Circuit Breaker Rating:	100% Rated
Electronic Trip Unit:	Micrologic Ammeter Trip Unit (5.0A)
Trip Function:	LSI
Installed Rating Plug:	Type A
Rating Plug Range:	0.4A to 1A