


KNOCKOUTS							
SYMBOL	A	B	C	D	E	F	G
IN	.50	.75	1.00	1.25	1.50	2.00	2.50
MM	13	19	25	32	38	51	64

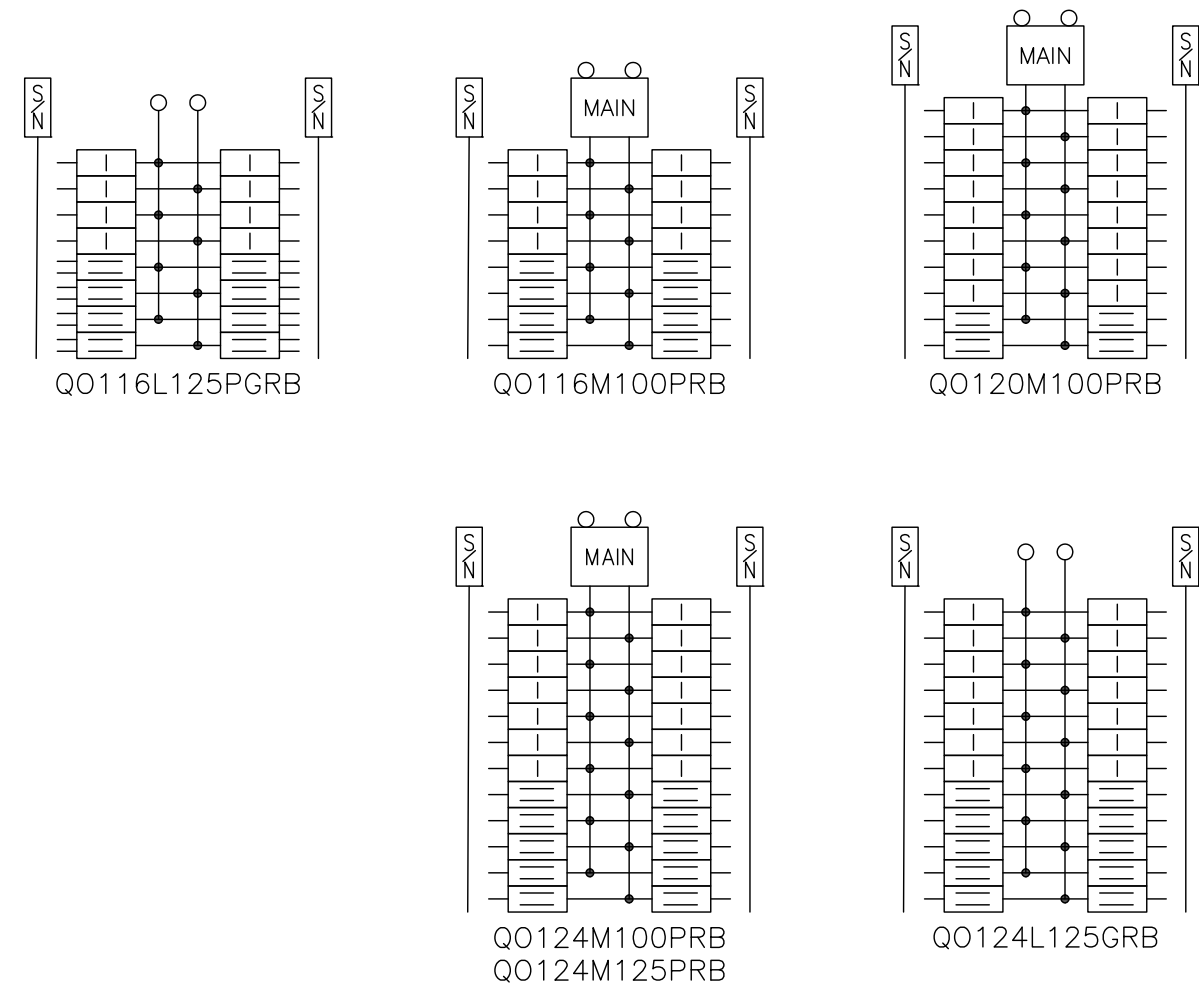

DUAL DIMENSIONS: INCHES  
MILLIMETERS

CATALOG NUMBER	MAXIMUM SYSTEM VOLTAGE	MAINS AMPERE RATING	SPACES	MAXIMUM NUMBER OF SINGLE POLE CIRCUITS	MAIN WIRE SIZE AWG AL/CU
QO116L125PGRB	120/240VAC 1Ø 3W	125	16	24	#6-2/0
QO116M100PRB		100	20		
QO120M100PRB				24	
QO124M100PRB			125		
QO124M125PRB					
QO124L125PGRB					

NOTES:  
 FINISH - GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPATIZED STEEL.  
 UL LISTED - FILE E-6294  
 NEUTRALS - INSULATED GROUNDABLE.  
 LOAD CENTERS WITH "G" IN CATALOG NUMBER INCLUDE A FIELD INSTALLABLE EQUIPMENT GROUND BAR KIT.  
 LOAD CENTERS WITH "P" IN CATALOG NUMBER INCLUDE EXTENDED NEUTRALS FOR PLUG ON NEUTRAL READY INTERIOR.  
 WHEN MOUNTING THESE LOAD CENTERS, ALLOW 1.25 INCHES OF CLEARANCE ON HINGED SIDE FOR THE DOOR TO OPEN

QO PLUG-ON NEUTRAL LOAD CENTERS  
 RAINPROOF NEMA 3R ENCLOSURE  
 SIDE HINGED  
 OUTDOOR



DWG# PWFDS-SYRS-0214  
 NO.