


# Product data sheet

## Characteristics

# 8910DP12V02Y248

Contacteur, Definite Purpose, 20A, 2 pole, 110/120VAC 50/60Hz coil, open, with cover

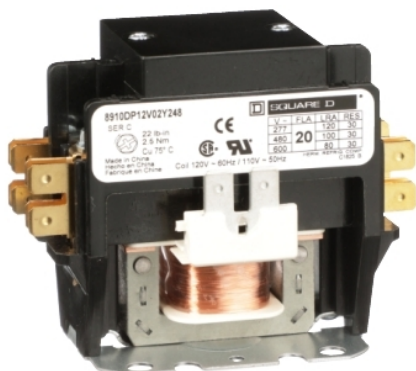

### Main

Product or Component Type	Definite Purpose Contactor
Line Rated Current	20 A
Number of Poles	2P
Pole contact composition	2 NO
Range of Product	DP
Provided equipment	Terminal cover

### Complementary

Maximum Horse Power Rating	1 Hp 115 V AC, 1 phase 2 hp 230 V AC, 1 phase
Locked rotor rated current	100 A 460 V AC 80 A 575 V AC 120 A 277 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	120 V AC 60 Hz 110 V AC 50 Hz
Phase	1 phase
Electrical Connection	Binder head Quick connect terminals

### Environment

Product Certifications	UL Recognized[RETURN]CSA
------------------------	--------------------------

### Ordering and shipping details

Category	21352-8910 DP 12
Discount Schedule	CP1B
GTIN	785901397182
Returnability	Yes
Country of origin	CN

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.30 in (5.842 cm)
Package 1 Width	2.70 in (6.858 cm)
Package 1 Length	3.50 in (8.89 cm)
Package 1 Weight	10.08 oz (285.763 g)

## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>

## Contractual warranty

Warranty	18 months
----------	-----------