


# Product data sheet

## Characteristics

# 9065SEO15

Overload Relay, Type S, melting alloy, separate mount overload, NEMA size 4, 3 pole, 3 phase, 133A, 600VAC

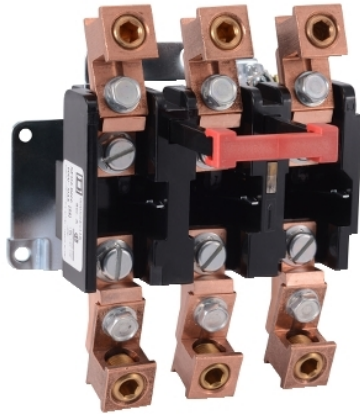

### Main

Range of Product	Separate Mounting
Thermal overload type	Melting alloy

### Complementary

NEMA size	4
Number of thermal units required	3
Mounting Support	Panel
[Ue] rated operational voltage	600 V AC
Height	6.97 in (177 mm)
Width	5.31 in (134.9 mm)
Depth	5.75 in (146.1 mm)

### Ordering and shipping details

Category	21661-9065 A,C,F,G,S(NOT SS)
Discount Schedule	CP1
GTIN	785901850823
Returnability	No
Country of origin	MX

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.40 in (16.256 cm)
Package 1 Width	8.50 in (21.59 cm)
Package 1 Length	6.40 in (16.256 cm)
Package 1 Weight	4.29 lb(US) (1.946 kg)

### Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
EU RoHS Directive	Not compliant
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

### Contractual warranty

Warranty	18 months
----------	-----------