
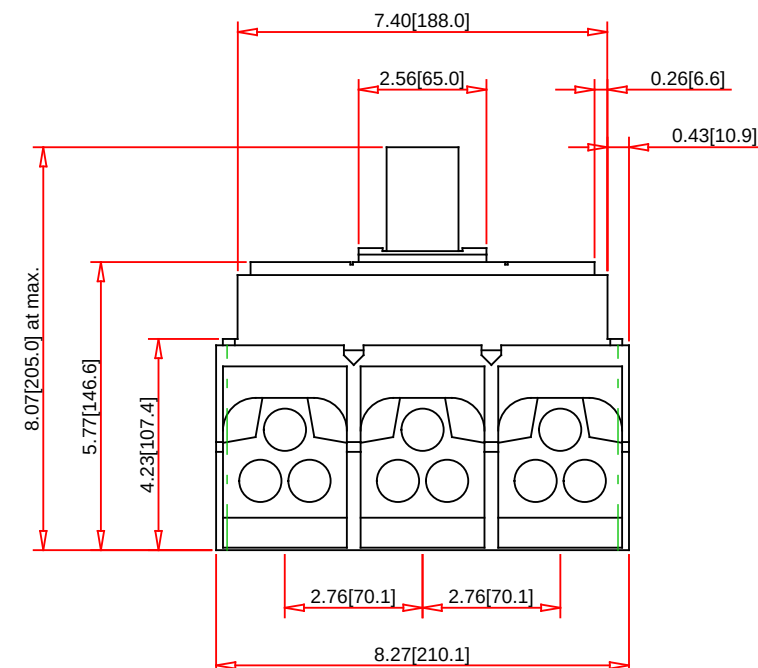
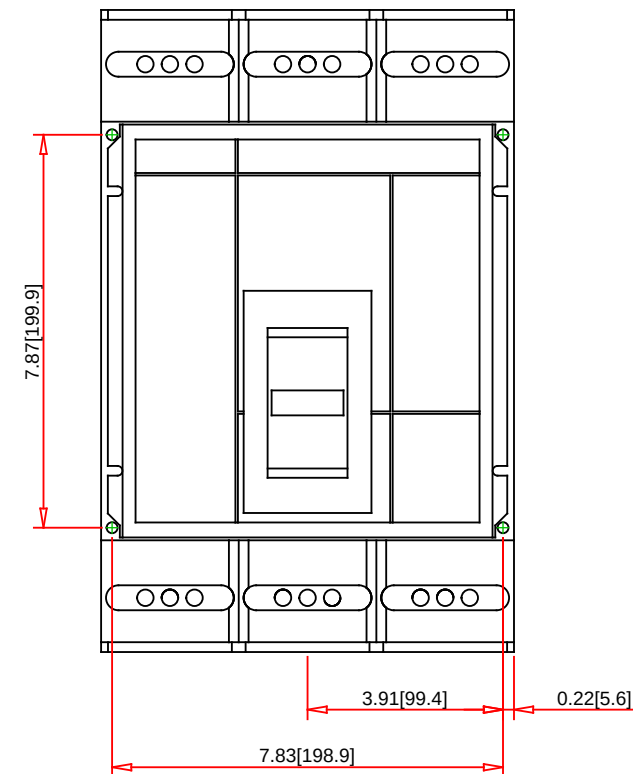


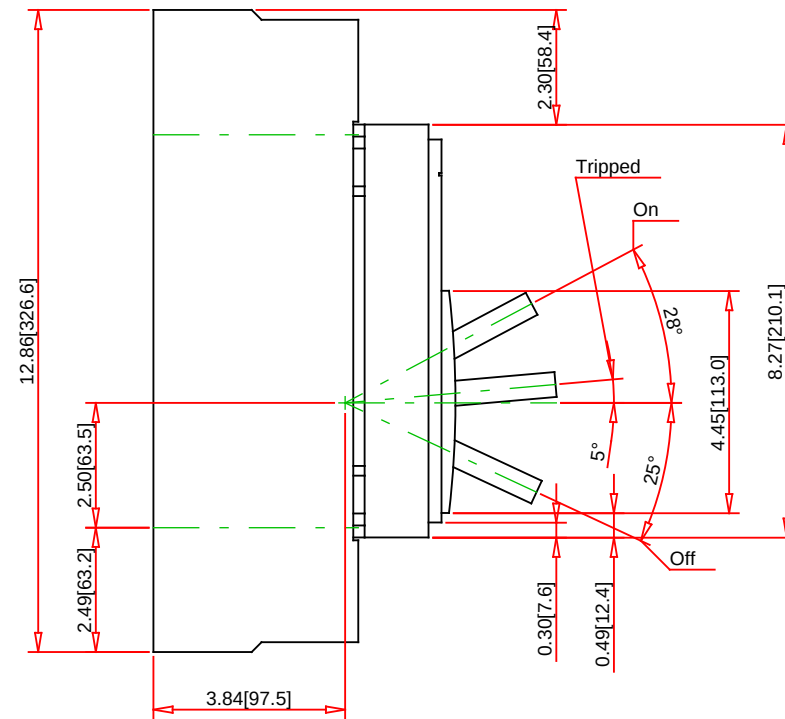

Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

PKL36060CU33A



by Schneider Electric

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

General Application:	Provides overload and short circuit protection
For Use With:	Panelboards and Switchboards
Approvals:	UL Listed - CSA Certified - IEC Rated
Mounting Type:	Unit Mount
Terminal Type:	Lugs (ON and OFF ends)
Wire Size:	#3/0-500 AWG/kcmil(Al/Cu)

Depth:	8.07 Inches
Height:	12.86 Inches
Width:	8.27 Inches

Description:

Description:
 Number of Poles:
 Sensor Rating:
 Voltage Rating:
 Interrupting Rating:
 Circuit Breaker Rating:
 Electronic Trip Unit:
 Trip Function:
 Installed Rating Plug:
 Rating Plug Range:

PowerPact P-frame Electronic Trip Circuit Breaker

Power Act I Frame Electronic Trip Circuit
3-Pole
600A
600VAC
65kA at 240VAC - 50kA at 480/600VAC
100% Rated
Micrologic Standard Trip Unit (5.0)
LSI
Type A
0.4A to 1A