




REV	DESCRIPTION	BY	DATE				
---	---	---	---	---	---	---	---

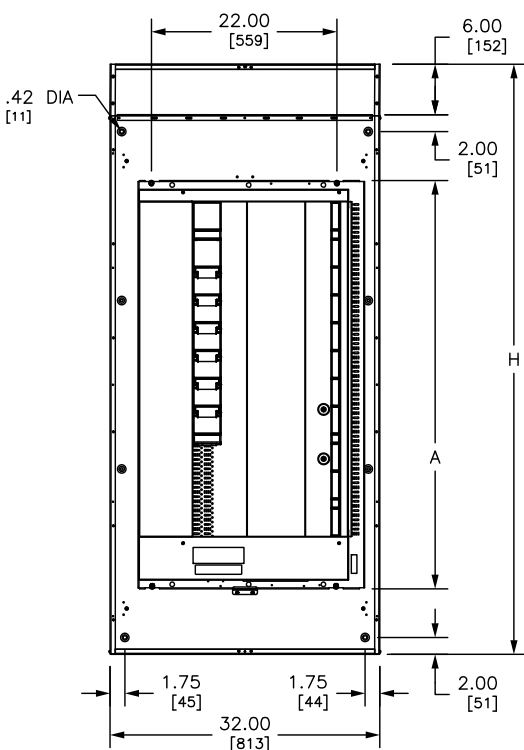


TYPICAL BOX WITH INTERIOR

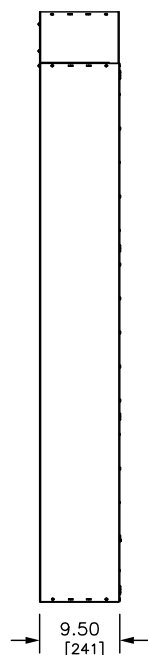


TYPICAL BOX SIDE VIEW

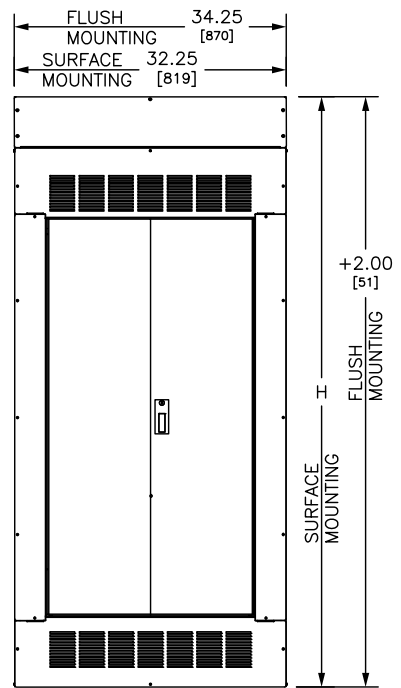


TYPICAL FRONT (4 PIECE TRIM - WITH DOOR)



TYPICAL MOUNTING OF BD, BG, BJ, BK, FA, FC, FD, FG, FH, FI, FJ, FK, FY, HD, HG, HJ, HL, JD, JG, JJ, JL, KA, KH Q2, Q2H, Q2-H, QB, QD, QG, QJ OR QO BREAKERS



BRANCH CONNECTION PHASING IS DETERMINED BY CIRCUIT BREAKER SELECTION

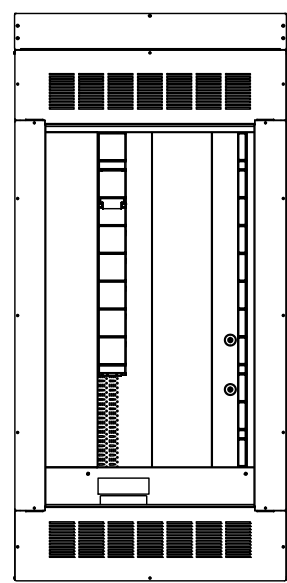

TYPICAL FRONT (4 PIECE TRIM - NO DOOR)

DUAL DIMENSIONS: INCHES MILLIMETERS

REFER TO DP CATALOG CLASS 2110 FOR ADDITIONAL INFORMATION

I-LINE HCM PANELBOARDS MEET THE APPLICABLE REQUIREMENTS OF UL AND CSA.

BOX: CODE GAUGE STEEL WITH REMOVABLE BLANK ENDWALLS.

FRONT: CODE GAUGE STEEL. GRAY BAKED ENAMEL FINISH ELECTRODEPOSITED OVER CLEANED PHOSPHATIZED STEEL.

LOCK: (COVERS WITH DOORS) HAVE 2 FLUSH LOCKS WITH NSR-251 KEY.

MAXIMUM MAIN BREAKER AMPERE RATING	BRANCH BREAKER MOUNTING SPACE (INCHES)	H		A	
		IN	MM	IN	MM
600/800	36	79.00	2007	47.10	1196
	72	97.00	2464	65.10	1654

NON-LINEAR

600/800	72	97.00	2464	65.10	1654
---------	----	-------	------	-------	------

NOTE: VENTED TRIM ONLY

JOB NAME: ---	EQUIPMENT DESIGNATION: ---
JOB LOCATION: ---	EQUIPMENT TYPE: I-LINE HCM VERTICAL MCB
DRAWN BY: ---	DRAWING TYPE: ---
ENGR: ---	
DATE: AUGUST 2018	
DRAWING STATUS: ---	DWG# PBA404TBX

