

SOLID STATE OVERLOAD RELAY - 600V AC MAXIMUM

NEMA SIZE	FULL LOAD CURRENT RANGE (AMPERES)	BASE UNIT		FEATURE UNIT
		TRIP CLASS 10 CODE (1)	TRIP CLASS 20 CODE (1)	TRIP CLASS 10/20 CODE (1)
00C	3-9	C10	C20	C20
0	6-18	010	020	020
1	9-27	110	120	120
00B	1.5-4.5	-	-	B20


TIGHTENING TORQUE			
POWER WIRE (*) (PRESSURE WIRE)	#14-8 AWG	20 lb-in	
CONTROL WIRE (TWO PER TERMINAL)	#16-12 AWG	-	

* = Optional lug kit available, suitable for #14-4 AWG wire, 50 lb-in tightening torque.

TYPE CODE (2)	SOLID STATE OVERLOAD RELAY
SS	BASE UNIT
SF	FEATURE UNIT

BASE UNIT RELAYS INCLUDE:
3 to 1 adjustment for trip current;
Phase loss and unbalance protection;
Direct replacement for Type S melting alloy;
and LED power indication.
They are ambient insensitive and self powered.
Electrical remote reset is also available.

FEATURE UNIT RELAYS INCLUDE:
All the features found on the Base Unit plus:
Switch selectable trip class;
and Class II ground fault detection.
These units accept the Analog Output Module.

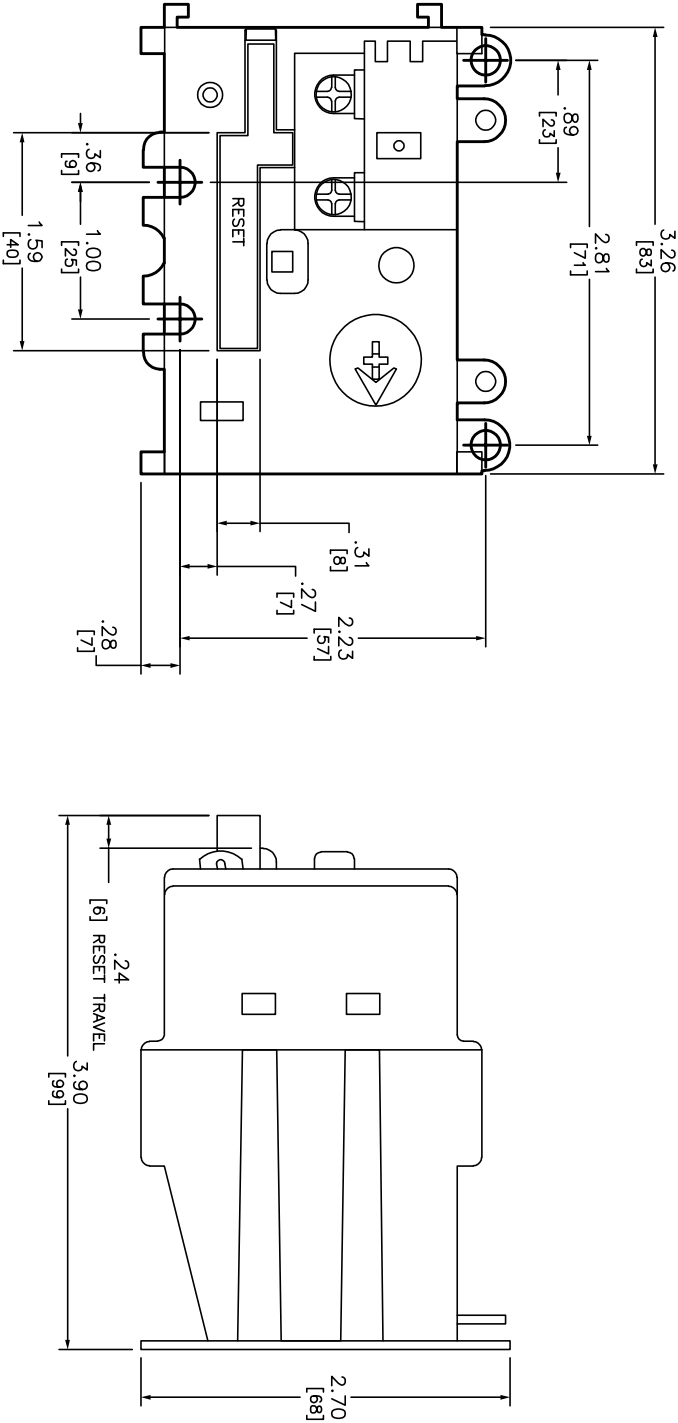

Catalog Number: 9065-(2)(1)
Ratings: SEE CHART
UL File/CCN: NKCR-7
CSA File/Class: 32011-03
Meets Standards: -
Weight: 1.06 lb
Wire Size: SEE CHART
Terminal torque: SEE CHART
Mounting Hwd.: (4) #8 screws

SOLID STATE OVERLOAD RELAY
CLASS 9065 TYPE DPA (2) (1)



DWG# E0320001-01