
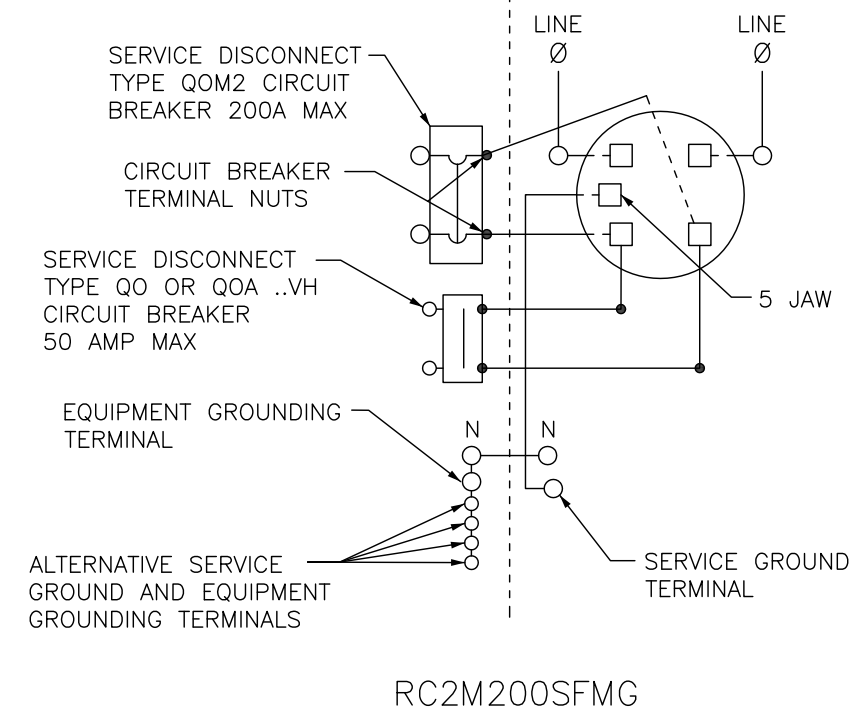
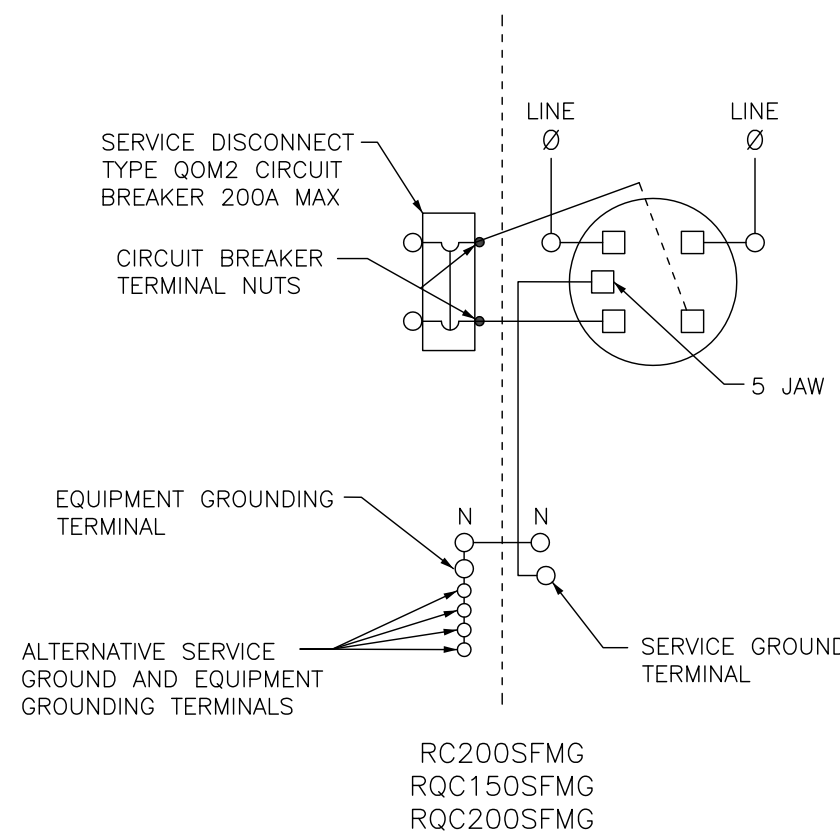
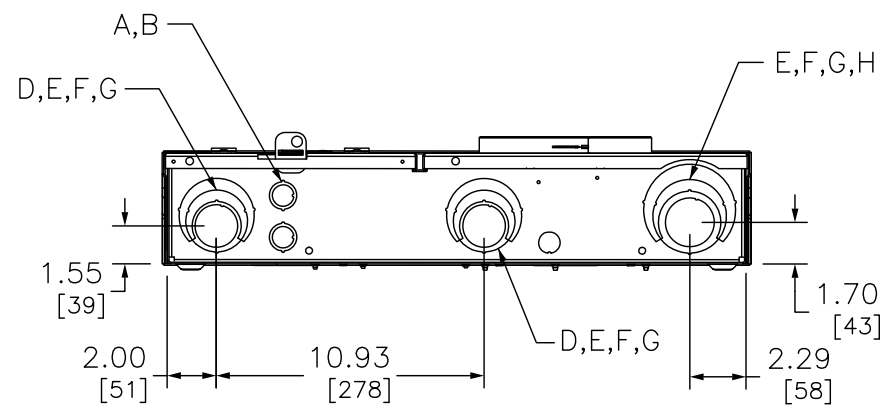


SYMBOL	KNOCKOUTS	
	CONDUIT SIZE	
	IN	MM
A	.50	13
B	.75	19
C	1.00	25
D	1.25	32
E	1.50	38
F	2.00	51
G	2.50	64
H	3.00	76

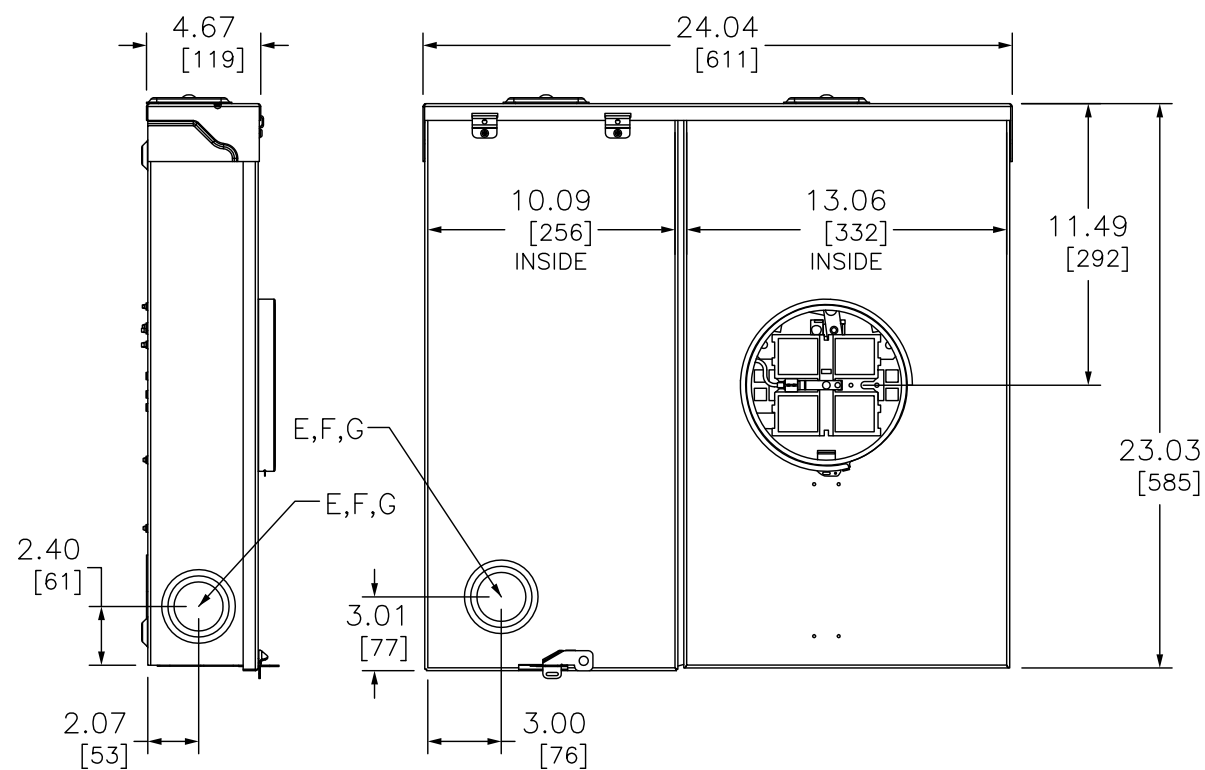

DUAL DIMENSIONS: INCHES
MILLIMETERS

AMPERE RATING	BYPASS TYPE	MAXIMUM SYSTEM VOLTAGE	SHORT CIRCUIT CURRENT RATING	CATALOG NUMBER	SERIES	LINE SIDE PHASE AND NEUTRAL LUGS AWG/HCMIL
200	NONE	120/240 VAC 1Ø 3W OR 208Y/120V (FROM A 3Ø 4W SYSTEM)	22K	RC200SFMG	M01	#6-350 CU/AL #6-350 CU/AL
			22K	RQC150SFMG	M01	
			22K	RQC200SFMG	M01	
			22K	RC2M200SFMG	M01	

NOTES
FINISH - GRAY BAKED ENAMEL POWDER COAT PAINT OVER CLEANED GALVANNEALED STEEL.
UL LISTED - FILE E-6294, VOL M.
SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT
SUITABLE FOR OVERHEAD OR UNDERGROUND SERVICE.

COMBINATION SERVICE ENTRANCE DEVICES
RINGLESS TYPE METER MAIN
RAINPROOF NEMA TYPE 3R ENCLOSURE
SURFACE ONLY



DWG# RQC200SFMG
NO.