

power contactor, AC-3 80 A, 37 kW / 400 V 1 NO + 1 NC, 24 V DC 3-pole, 3 NO, Size S3 Spring-type terminal integrated varistor Suitable for 2 A PLC outputs



|                          |                |
|--------------------------|----------------|
| product brand name       | SIRIUS         |
| product designation      | Coupling relay |
| product type designation | 3RT2           |

| General technical data  |        |
|---|--------|
| size of contactor   | S3     |
| product extension   |        |
| <ul style="list-style-type: none"> <li>function module for communication</li> </ul>                 | No     |
| <ul style="list-style-type: none"> <li>auxiliary switch</li> </ul>                                  | Yes    |
| power loss [W] for rated value of the current   |        |
| <ul style="list-style-type: none"> <li>at AC in hot operating state</li> </ul>                      | 15.9 W |
| <ul style="list-style-type: none"> <li>at AC in hot operating state per pole</li> </ul>             | 5.3 W  |
| power loss [W] for rated value of the current without load current share typical                    | 0.9 W  |
| surge voltage resistance  |        |
| <ul style="list-style-type: none"> <li>of main circuit rated value</li> </ul>                       | 8 kV   |
| <ul style="list-style-type: none"> <li>of auxiliary circuit rated value</li> </ul>                  | 6 kV   |
| maximum permissible voltage for safe isolation  |        |
| <ul style="list-style-type: none"> <li>between coil and main contacts acc. to EN 60947-1</li> </ul> | 690 V  |

|   |                             |
|---|-----------------------------|
| <b>protection class IP</b>  |                             |
| • on the front  | IP20                        |
| • of the terminal   | IP00                        |
| <b>shock resistance at rectangular impulse</b>                                      |                             |
| • at AC   | 6.3 g / 5 ms, 3.6 g / 10 ms |
| • at DC   | 6.3 g / 5 ms, 3.6 g / 10 ms |
| <b>shock resistance with sine pulse</b>   |                             |
| • at AC   | 9.8 g / 5 ms, 5.6 g / 10 ms |
| • at DC   | 9.8 g / 5 ms, 5.6 g / 10 ms |
| <b>mechanical service life (switching cycles)</b>                                   |                             |
| • of contactor typical  | 10 000 000                  |
| • of the contactor with added electronics-compatible auxiliary switch block typical | 5 000 000                   |
| • of the contactor with added auxiliary switch block typical                        | 10 000 000                  |
| <b>reference code acc. to DIN EN 81346-2</b>  | Q                           |

|   |                |
|---|----------------|
| <b>Ambient conditions</b>                                 |                |
| • installation altitude at height above sea level maximum | 2 000 m        |
| <b>ambient temperature</b>                                |                |
| • during operation  | -25 ... +60 °C |
| • during storage  | -55 ... +80 °C |

|   |         |
|---|---------|
| <b>Main circuit</b>                                     |         |
| <b>number of poles for main current circuit</b>         | 3       |
| <b>number of NO contacts for main contacts</b>          | 3       |
| <b>operating voltage</b>                                |         |
| • at AC-3 rated value maximum                           | 1 000 V |
| <b>operating current</b>                                |         |
| • at AC-1 at 400 V                                      |         |
| — at ambient temperature 40 °C rated value              | 125 A   |
| • at AC-1   |         |
| — up to 690 V at ambient temperature 40 °C rated value  | 125 A   |
| — up to 690 V at ambient temperature 60 °C rated value  | 105 A   |
| — up to 1000 V at ambient temperature 40 °C rated value | 60 A    |
| — up to 1000 V at ambient temperature 60 °C rated value | 50 A    |
| • at AC-3   |         |
| — at 400 V rated value                                  | 80 A    |
| — at 500 V rated value                                  | 80 A    |

|  |        |
|--|--------|
| — at 690 V rated value   | 58 A   |
| • at AC-4 at 400 V rated value                                       | 66 A   |
| • at AC-5a up to 690 V rated value                                   | 110 A  |
| • at AC-5b up to 400 V rated value                                   | 80 A   |
| • at AC-6a   |        |
| — up to 230 V for current peak value n=20 rated value                | 80 A   |
| — up to 400 V for current peak value n=20 rated value                | 80 A   |
| — up to 500 V for current peak value n=20 rated value                | 80 A   |
| — up to 690 V for current peak value n=20 rated value                | 58 A   |
| • at AC-6a   |        |
| — up to 230 V for current peak value n=30 rated value                | 54 A   |
| — up to 400 V for current peak value n=30 rated value                | 54 A   |
| — up to 500 V for current peak value n=30 rated value                | 54 A   |
| — up to 690 V for current peak value n=30 rated value                | 54 A   |
| <b>minimum cross-section in main circuit</b>                         |        |
| • at maximum AC-1 rated value  | 50 mm² |
| <b>operating current for approx. 200000 operating cycles at AC-4</b> |        |
| • at 400 V rated value   | 34 A   |
| • at 690 V rated value   | 24 A   |
| <b>operating current</b>   |        |
| • at 1 current path at DC-1  |        |
| — at 24 V rated value  | 100 A  |
| — at 110 V rated value   | 9 A    |
| — at 220 V rated value   | 2 A    |
| — at 440 V rated value   | 0.6 A  |
| — at 600 V rated value   | 0.4 A  |
| • with 2 current paths in series at DC-1                             |        |
| — at 24 V rated value  | 100 A  |
| — at 110 V rated value   | 100 A  |
| — at 220 V rated value   | 10 A   |
| — at 440 V rated value   | 1.8 A  |
| — at 600 V rated value   | 1 A    |
| • with 3 current paths in series at DC-1                             |        |
| — at 24 V rated value  | 100 A  |

|  |         |
|--|---------|
| — at 110 V rated value   | 100 A   |
| — at 220 V rated value   | 80 A    |
| — at 440 V rated value   | 4.5 A   |
| — at 600 V rated value   | 2.6 A   |
| <b>operating current</b>   |         |
| • at 1 current path at DC-3 at DC-5                                |         |
| — at 24 V rated value  | 40 A    |
| — at 110 V rated value   | 2.5 A   |
| — at 220 V rated value   | 1 A     |
| — at 440 V rated value   | 0.15 A  |
| — at 600 V rated value   | 0.06 A  |
| • with 2 current paths in series at DC-3 at DC-5                   |         |
| — at 24 V rated value  | 100 A   |
| — at 110 V rated value   | 100 A   |
| — at 220 V rated value   | 7 A     |
| — at 440 V rated value   | 0.42 A  |
| — at 600 V rated value   | 0.16 A  |
| • with 3 current paths in series at DC-3 at DC-5                   |         |
| — at 24 V rated value  | 100 A   |
| — at 110 V rated value   | 100 A   |
| — at 220 V rated value   | 35 A    |
| — at 440 V rated value   | 0.8 A   |
| — at 600 V rated value   | 0.35 A  |
| <b>operating power</b>   |         |
| • at AC-2 at 400 V rated value                                     | 37 kW   |
| • at AC-3  |         |
| — at 230 V rated value   | 22 kW   |
| — at 400 V rated value   | 37 kW   |
| — at 500 V rated value   | 45 kW   |
| — at 690 V rated value   | 55 kW   |
| <b>operating power for approx. 200000 operating cycles at AC-4</b> |         |
| • at 400 V rated value   | 17.9 kW |
| • at 690 V rated value   | 21.8 kW |
| <b>operating apparent output at AC-6a</b>                          |         |
| • up to 230 V for current peak value n=20 rated value              | 31 kV·A |
| • up to 400 V for current peak value n=20 rated value              | 55 kV·A |
| • up to 500 V for current peak value n=20 rated value              | 69 kV·A |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• up to 690 V for current peak value n=20 rated value</li> </ul>   | 69 kV·A   |
| <b>operating apparent output at AC-6a</b> <ul style="list-style-type: none"> <li>• up to 230 V for current peak value n=30 rated value</li> <li>• up to 400 V for current peak value n=30 rated value</li> <li>• up to 500 V for current peak value n=30 rated value</li> <li>• up to 690 V for current peak value n=30 rated value</li> </ul>  | 21.5 kV·A<br>37.4 kV·A<br>46.7 kV·A<br>64.5 kV·A  |
| <b>short-time withstand current in cold operating state up to 40 °C</b> <ul style="list-style-type: none"> <li>• limited to 1 s switching at zero current maximum</li> <li>• limited to 5 s switching at zero current maximum</li> <li>• limited to 10 s switching at zero current maximum</li> <li>• limited to 30 s switching at zero current maximum</li> <li>• limited to 60 s switching at zero current maximum</li> </ul> | 1 500 A; Use minimum cross-section acc. to AC-1 rated value<br>1 186 A; Use minimum cross-section acc. to AC-1 rated value<br>851 A; Use minimum cross-section acc. to AC-1 rated value<br>538 A; Use minimum cross-section acc. to AC-1 rated value<br>423 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>no-load switching frequency</b> <ul style="list-style-type: none"> <li>• at DC</li> </ul>  | 1 000 1/h   |
| <b>operating frequency</b> <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> <li>• at AC-2 maximum</li> <li>• at AC-3 maximum</li> <li>• at AC-4 maximum</li> </ul>   | 900 1/h<br>400 1/h<br>1 000 1/h<br>300 1/h  |
| <b>Control circuit/ Control</b>   |   |
| <b>type of voltage of the control supply voltage</b>  | DC  |
| <b>control supply voltage at DC</b> <ul style="list-style-type: none"> <li>• rated value</li> </ul>   | 24 V  |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b> <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>   | 0.8<br>1.2  |
| <b>design of the surge suppressor</b>   | with varistor   |
| <b>inrush current peak</b>  | 2.7 A   |
| <b>duration of inrush current peak</b>  | 50 µs   |
| <b>starting current average value</b>   | 0.9 A   |
| <b>Peak starting current</b>  | 2.1 A   |
| <b>Duration of starting current</b>   | 150 ms  |

|  |                  |
|--|------------------|
| <b>Holding current average value</b>                     | 40 mA            |
| <b>closing power of magnet coil at DC</b>                | 25 W             |
| <b>holding power of magnet coil at DC</b>                | 0.9 W            |
| <b>closing delay</b>                                     |                  |
| • at DC  | 50 ... 70 ms     |
| <b>opening delay</b>                                     |                  |
| • at DC  | 38 ... 57 ms     |
| <b>arcing time</b>                                       | 10 ... 20 ms     |
| <b>control version of the switch operating mechanism</b> | Standard A1 - A2 |

#### Auxiliary circuit

|   |   |
|---|---|
| <b>number of NC contacts for auxiliary contacts</b> |   |
| • instantaneous contact                             | 1   |
| <b>number of NO contacts for auxiliary contacts</b> |   |
| • instantaneous contact                             | 1   |
| <b>operating current at AC-12 maximum</b>           | 10 A  |
| <b>operating current at AC-15</b>                   |   |
| • at 230 V rated value                              | 6 A   |
| • at 400 V rated value                              | 3 A   |
| • at 500 V rated value                              | 2 A   |
| • at 690 V rated value                              | 1 A   |
| <b>operating current at DC-12</b>                   |   |
| • at 24 V rated value                               | 10 A  |
| • at 48 V rated value                               | 6 A   |
| • at 60 V rated value                               | 6 A   |
| • at 110 V rated value                              | 3 A   |
| • at 125 V rated value                              | 2 A   |
| • at 220 V rated value                              | 1 A   |
| • at 600 V rated value                              | 0.15 A  |
| <b>operating current at DC-13</b>                   |   |
| • at 24 V rated value                               | 10 A  |
| • at 48 V rated value                               | 2 A   |
| • at 60 V rated value                               | 2 A   |
| • at 110 V rated value                              | 1 A   |
| • at 125 V rated value                              | 0.9 A   |
| • at 220 V rated value                              | 0.3 A   |
| • at 600 V rated value                              | 0.1 A   |
| <b>contact reliability of auxiliary contacts</b>    | 1 faulty switching per 100 million (17 V, 1 mA) |

#### UL/CSA ratings

|   |      |
|---|------|
| <b>full-load current (FLA) for three-phase AC motor</b> |      |
| • at 480 V rated value                                  | 77 A |
| • at 600 V rated value                                  | 62 A |

|   |   |
|---|---|
| <b>yielded mechanical performance [hp]</b>  |   |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for three-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul> | 7.5 hp<br>15 hp<br><br>25 hp<br>30 hp<br>60 hp<br>60 hp |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / P600   |

## Short-circuit protection

|   |   |
|---|---|
| <b>design of the fuse link</b>  |   |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul> | gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)<br>gG: 160A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A (415V,80kA)<br>gG: 10 A (500 V, 1 kA) |

## Installation/ mounting/ dimensions

|  |  |
|--|--|
| <b>mounting position</b>   | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>mounting type</b>   | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715   |
| <ul style="list-style-type: none"> <li>• side-by-side mounting</li> </ul>  | Yes  |
| <b>height</b>  | 140 mm   |
| <b>width</b>   | 70 mm  |
| <b>depth</b>   | 152 mm   |
| <b>required spacing</b>  |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> </ul> </li> </ul> | 20 mm<br>10 mm<br>10 mm<br>0 mm<br><br>20 mm<br>10 mm<br>10 mm<br>10 mm<br><br>20 mm   |

|               |       |
|---------------|-------|
| — upwards     | 10 mm |
| — downwards   | 10 mm |
| — at the side | 10 mm |

## Connections/ Terminals

|   |   |
|---|---|
| <b>type of electrical connection</b>  |   |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> <li>• at contactor for auxiliary contacts</li> <li>• of magnet coil</li> </ul>  | screw-type terminals<br>spring-loaded terminals<br>Spring-type terminals<br>Spring-type terminals                             |
| <b>type of connectable conductor cross-sections</b>   |   |
| <ul style="list-style-type: none"> <li>• for main contacts               <ul style="list-style-type: none"> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG conductors for main contacts</li> </ul>  | 2x (2.5 ... 35 mm <sup>2</sup> ), 1x (2.5 ... 50 mm <sup>2</sup> )<br>2x (10 ... 1/0), 1x (10 ... 2)                          |
| <b>connectable conductor cross-section for main contacts</b>  |   |
| <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> <li>• finely stranded with core end processing</li> </ul>   | 2.5 ... 16 mm <sup>2</sup><br>6 ... 70 mm <sup>2</sup><br>2.5 ... 50 mm <sup>2</sup>  |
| <b>connectable conductor cross-section for auxiliary contacts</b>   |   |
| <ul style="list-style-type: none"> <li>• single or multi-stranded</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> </ul>   | 0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>                                     |
| <ul style="list-style-type: none"> <li>• type of connectable conductor cross-sections for auxiliary contacts               <ul style="list-style-type: none"> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• type of connectable conductor cross-sections at AWG conductors for auxiliary contacts</li> </ul> | 2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16) |
| <b>AWG number as coded connectable conductor cross section</b>  |   |
| <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• for auxiliary contacts</li> </ul>   | 10 ... 2<br>20 ... 14   |






## Safety related data




|   |              |
|---|--------------|
| <b>B10 value</b>  |              |
| <ul style="list-style-type: none"> <li>• with high demand rate acc. to SN 31920</li> </ul>  | 1 000 000    |
| <b>proportion of dangerous failures</b>   |              |
| <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> <li>• with high demand rate acc. to SN 31920</li> </ul> | 40 %<br>73 % |
| <b>failure rate [FIT]</b>   |              |



|   |  |
|---|--|
| • with low demand rate acc. to SN 31920                                   | 100 FIT  |
| <b>product function</b>   |  |
| • mirror contact acc. to IEC 60947-4-1                                    | Yes  |
| • positively driven operation acc. to IEC 60947-5-1                       | No   |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b> | 20 y   |
| <b>protection against electrical shock</b>                                | finger-safe when touched vertically from front acc. to IEC 60529 |
| suitability for use safety-related switching OFF                          | Yes  |

#### Certificates/ approvals

| General Product Approval  |   |   |                    |   | EMC   |
|---|---|---|--------------------|---|---|
|  |  |  | <a href="#">KC</a> |  |  |
| CCC   | CSA   | UL  |                    |   | RCM   |

| Declaration of Conformity   | Test Certificates             |  | Marine / Shipping   |   |
|---|-------------------------------|--|---|---|
|  | <a href="#">Miscellaneous</a> | <a href="#">Type Test Certificates/Test Report</a> | <a href="#">Special Test Certificate</a>  |   |
| EG-Konf.  |                               |  |  |  |
|   |                               |  | ABS   | LRS   |

| Marine / Shipping   | other                        | Railway                             |
|---|------------------------------|-------------------------------------|
|  | <a href="#">Confirmation</a> | <a href="#">Vibration and Shock</a> |
|  |                              |                                     |
|  |                              |                                     |
|  |                              |                                     |
| PRS   |                              |                                     |
| RINA  |                              |                                     |
| RMRS  |                              |                                     |
|   |                              |                                     |

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2045-3KB40>

##### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2045-3KB40>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-3KB40>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2045-3KB40&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2045-3KB40&lang=en)


##### Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-3KB40/char>

##### Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2045-3KB40&objecttype=14&gridview=view1>

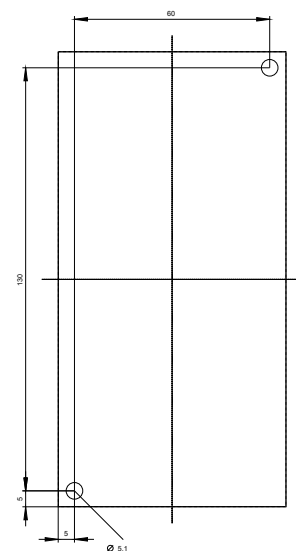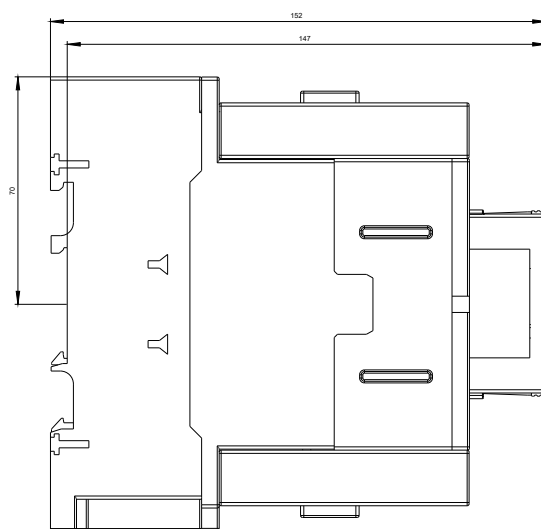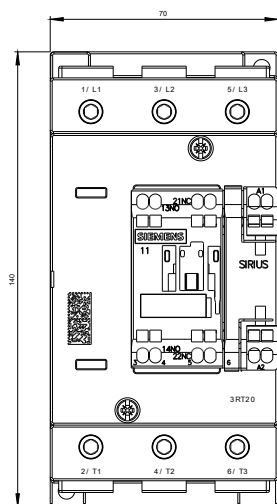

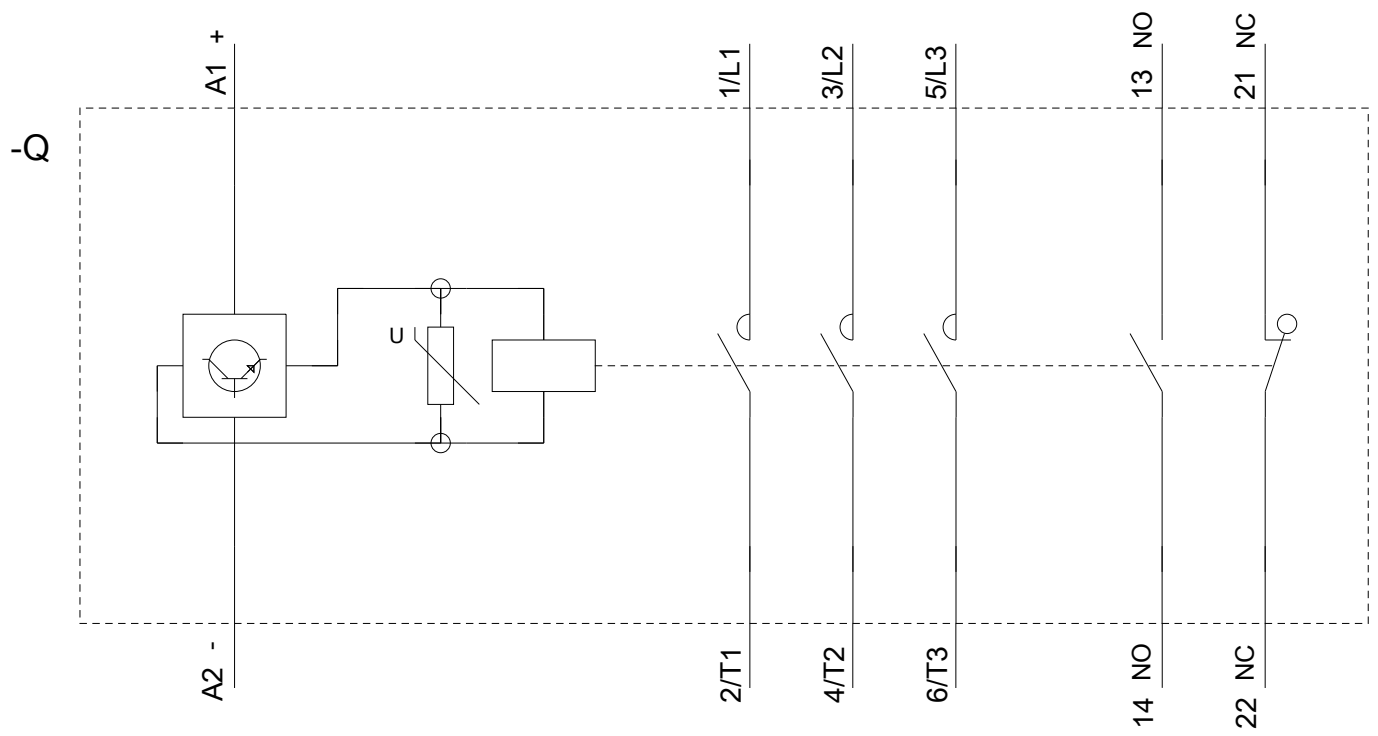

last modified:

09/24/2020