


product type designation
product description

IE TP XP CORD RJ45/RJ45
Crossover patch cable, preferred length, preassembled with two RJ45 connectors (10/100MB)
Industrial Ethernet TP XP Cord RJ45/RJ45, TP cord Pre-assembled with 2 RJ45 connector, Send and receive line crossed, Length 2 m

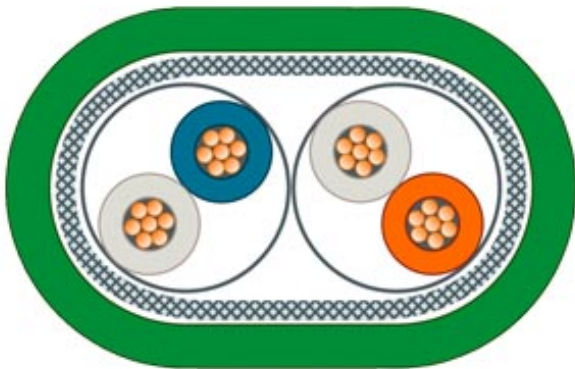

suitability for use	Easy connection of terminal devices to the IE FC cabling system
cable designation	LI 02YSCY 2x2x0,15/0,98 PIMF ICCS GN
wire length	2 m

electrical data	
damping ratio per length	
<ul style="list-style-type: none"> at 10 MHz / maximum 	0.09 dB/m
<ul style="list-style-type: none"> at 100 MHz / maximum 	0.285 dB/m
<ul style="list-style-type: none"> at 300 MHz / maximum 	0.495 dB/m
<ul style="list-style-type: none"> at 600 MHz / maximum 	0.75 dB/m
impedance	
<ul style="list-style-type: none"> at 1 MHz ... 100 MHz 	100 Ω
<ul style="list-style-type: none"> at 10 MHz ... 600 MHz 	100 Ω
relative symmetrical tolerance	
<ul style="list-style-type: none"> of the characteristic impedance at 1 MHz ... 100 MHz 	15 %
<ul style="list-style-type: none"> of the characteristic impedance at 10 MHz ... 600 MHz 	6 %

transfer impedance per length / at 10 MHz	10 mΩ/m
loop resistance per length / maximum	300 mΩ/m
insulation resistance coefficient	150 GΩ·m
operating voltage	
• RMS value	80 V

mechanical data

number of electrical cores	4
design of the shield	Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires
core diameter	
• of AWG26 core	0.48 mm
outer diameter	
• of inner conductor	0.48 mm
• of the wire insulation	0.98 mm
width / of cable sheath	5.8 mm
symmetrical tolerance of width / of cable sheath	0.2 mm
thickness / of cable sheath	3.7 mm
symmetrical tolerance of thickness / of cable sheath	0.2 mm
material	
• of the wire insulation	polyethylene (PE)
• of cable sheath	PVC
color	
• of the insulation of data wires	white/blue, white/orange
• of cable sheath	green
bending radius	
• with single bend / minimum permissible	24 mm
• with multiple bends / minimum permissible	42 mm
weight per length	32 kg/km

ambient conditions

ambient temperature	
• during operation	-40 ... +70 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
• during installation	-40 ... +70 °C
burning behavior	flame resistant according to IEC 60332-2-1
chemical resistance	
• to mineral oil	oil resistant according to IEC 60811-2-1 (4 h / 70°C)
• to grease	Conditional resistance
protection class IP	IP20

product features, product functions, product components / general

product feature	
-----------------	--

- halogen-free
- silicon-free

No
Yes

standards, specifications, approvals

UL/ETL listing / 300 V Rating	No
UL/ETL style / 600 V Rating	No
certificate of suitability	
• EAC approval	Yes
• UL approval	Yes
standard for structured cabling	Cat5
Marine classification association	
• American Bureau of Shipping Europe Ltd. (ABS)	No
• Bureau Veritas (BV)	No
• Det Norske Veritas (DNV)	No
• Germanische Lloyd (GL)	No
• Lloyds Register of Shipping (LRS)	No
• Nippon Kaiji Kyokai (NK)	No
• Polski Rejestr Statkow (PRS)	No

further information / internet-Links

Internet-Link

- to website: Selector SIMATIC NET SELECTION TOOL
- to website: Industrial communication
- to website: Industry Mall
- to website: Information and Download Center
- to website: Image database
- to website: CAx Download Manager
- to website: Industry Online Support

<http://www.siemens.com/snst>
<http://www.siemens.com/simatic-net>
<https://mall.industry.siemens.com>
<http://www.siemens.com/industry/infocenter>
<http://automation.siemens.com/bilddb>
<http://www.siemens.com/cax>
<https://support.industry.siemens.com>

last modified:

09/08/2020