









Indicator lights, 22 mm, round, metal, shiny, green, lens, smooth, with holder, LED module with integrated LED 24 V AC/DC, screw terminal

product brand name	SIRIUS ACT
product designation	Indicator lights
design of the product	Complete unit
product type designation	3SU1
product line	Metal, shiny, 22 mm
manufacturer's article number	
• of supplied LED module	3SU1401-1BB40-1AA0
• of the supplied holder	3SU1550-0AA10-0AA0
• of supplied repeater	3SU1051-6AA40-0AA0
Enclosure	
number of command points	1
Actuator	
product extension optional light source	Yes
color	
• of the actuating element	green
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	29.45 mm
Front ring	
product component front ring	No
Holder	
material of the holder	Metal
Display	
number of LED modules	1
General technical data	
product component light source	Yes
insulation voltage rated value	320 V
degree of pollution	3
surge voltage resistance rated value	4 kV
protection class IP	IP66, IP67, IP69(IP69K)
• of the terminal	IP20
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	
• acc. to IEC 60068-2-27	Sinusoidal half-wave 50g / 11 ms
vibration resistance	
• acc. to IEC 60068-2-6	10 ... 500 Hz: 5g
reference code acc. to IEC 81346-2	P

Supply voltage		
type of voltage of the supply voltage of the light source	AC/DC	
<ul style="list-style-type: none"> supply voltage 1 of the light source at AC at 50 Hz rated value supply voltage 1 of the light source at AC at 60 Hz rated value 	24 V	
<ul style="list-style-type: none"> supply voltage 1 of the light source at DC rated value 	24 V	
relative negative tolerance of the supply voltage	20 %	
relative positive tolerance of the supply voltage	20 %	
Control circuit/ Control		
inrush current maximum	2 A	
Connections/ Terminals		
type of electrical connection of modules and accessories	Screw-type terminal	
type of connectable conductor cross-sections		
<ul style="list-style-type: none"> solid with core end processing solid without core end processing finely stranded with core end processing finely stranded without core end processing at AWG cables 	2x (0.5 ... 0.75 mm ²) 2x (1.0 ... 1.5 mm ²) 2x (0.5 ... 1.5 mm ²) 2x (1,0 ... 1,5 mm ²) 2x (18 ... 14)	
tightening torque of the screws in the bracket	1 ... 1.2 N·m	
<ul style="list-style-type: none"> tightening torque with screw-type terminals 	0.8 ... 0.9 N·m	
Lamp		
type of light source	LED	
color of the light source	green	
light intensity	900 ... 1 800 mcd	
Ambient conditions		
<ul style="list-style-type: none"> ambient temperature during operation ambient temperature during storage 	-25 ... +70 °C -40 ... +80 °C	
environmental category during operation acc. to IEC 60721	3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95 %, no condensation in operation permitted for all devices behind front panel)	
Installation/ mounting/ dimensions		
fastening method	front panel mounting	
<ul style="list-style-type: none"> of modules and accessories 	Front plate mounting	
height	40 mm	
width	30 mm	
shape of the installation opening	round	
mounting diameter	22.3 mm	
positive tolerance of installation diameter	0.4 mm	
mounting height	11.8 mm	
installation width	29.5 mm	
installation depth	49.7 mm	
Certificates/ approvals		
General Product Approval	Declaration of Conformity	
     		
Declaration of Conformity	Test Certificates	Marine / Shipping

[Miscellaneous](#)

[Type Test
Certificates/Test
Report](#)



Marine / Shipping

other



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1152-6AA40-1AA0>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1152-6AA40-1AA0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1152-6AA40-1AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1152-6AA40-1AA0&lang=en

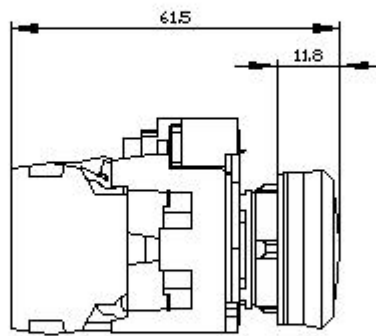

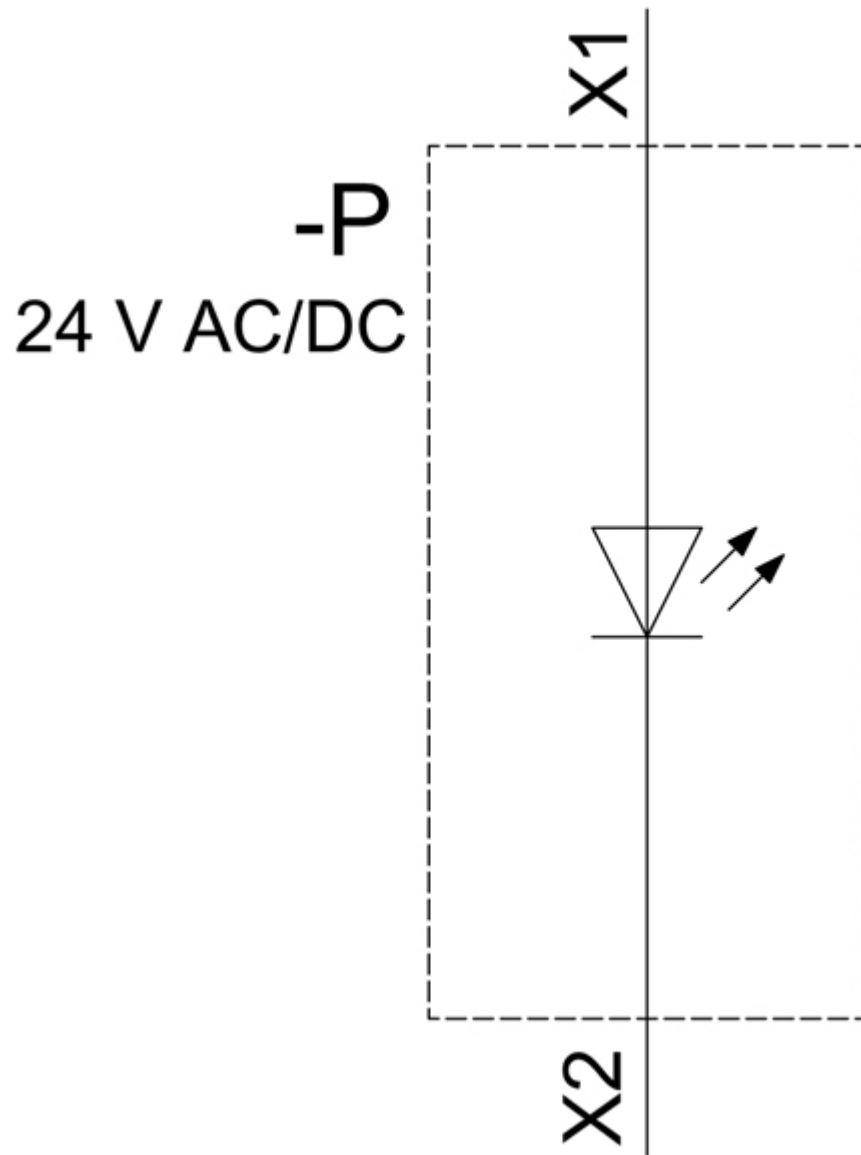

last modified:

8/31/2020 