



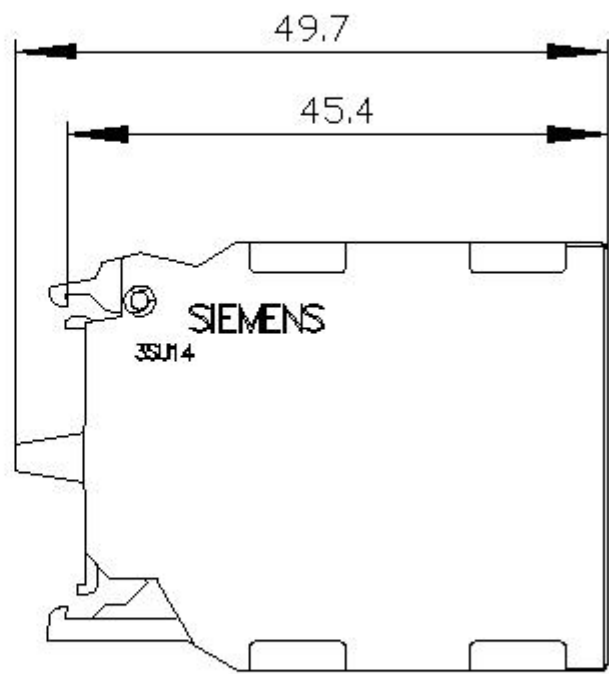


Contact module with 2 contact elements, 2 NC, spring-type terminal, for front plate mounting, Z=150-unit packaging

| | |
|---|--|
| product brand name | SIRIUS ACT |
| product designation | Contact module |
| product type designation | 3SU1 |
| General technical data | |
| product function positive opening | Yes |
| insulation voltage rated value | 500 V |
| degree of pollution | 3 |
| type of voltage | |
| • of the operating voltage | AC/DC |
| • of the input voltage | AC/DC |
| surge voltage resistance rated value | 6 kV |
| protection class IP | |
| • of the enclosure | IP40 |
| • of the terminal | IP20 |
| shock resistance | |
| • acc. to IEC 60068-2-27 | Sinusoidal half-wave 50g / 11 ms |
| • for railway applications acc. to DIN EN 61373 | Category 1, Class B |
| vibration resistance | |
| • acc. to IEC 60068-2-6 | 10 ... 500 Hz: 5g |
| • for railway applications acc. to DIN EN 61373 | Category 1, Class B |
| operating frequency maximum | 3 600 1/h |
| mechanical service life (switching cycles) typical | 10 000 000 |
| electrical endurance (switching cycles) typical | 10 000 000 |
| thermal current | 10 A |
| reference code acc. to IEC 81346-2 | S |
| continuous current of the C characteristic MCB | 10 A |
| • operating voltage at AC | |
| — at 50 Hz rated value | 5 ... 500 V |
| — at 60 Hz rated value | 5 ... 500 V |
| • operating voltage at DC rated value | 5 ... 500 V |
| Power Electronics | |
| contact reliability | One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) |
| Auxiliary circuit | |
| design of the contact of auxiliary contacts | Silver alloy |
| number of NC contacts for auxiliary contacts | 2 |
| • lagging switching | 0 |

| | |
|--|---|
| number of NO contacts for auxiliary contacts | 0 |
| • leading contact | 0 |
| operational current at AC-12 | |
| • at 24 V rated value | 10 A |
| • at 48 V rated value | 10 A |
| • at 110 V rated value | 10 A |
| • at 230 V rated value | 8 A |
| • at 400 V rated value | 8 A |
| operational current at AC-15 | |
| • at 24 V rated value | 6 A |
| • at 48 V rated value | 6 A |
| • at 110 V rated value | 6 A |
| • at 230 V rated value | 6 A |
| • at 400 V rated value | 3 A |
| • at 500 V rated value | 1.4 A |
| operational current at DC-12 | |
| • at 24 V rated value | 10 A |
| • at 48 V rated value | 5 A |
| • at 110 V rated value | 2.5 A |
| • at 230 V rated value | 1 A |
| • at 400 V rated value | 0.3 A |
| • at 500 V rated value | 0.3 A |
| operational current at DC-13 | |
| • at 24 V rated value | 3 A |
| • at 48 V rated value | 1.5 A |
| • at 110 V rated value | 0.7 A |
| • at 230 V rated value | 0.3 A |
| • at 400 V rated value | 0.1 A |
| • at 500 V rated value | 0.1 A |
| Connections/ Terminals | |
| type of electrical connection | spring-loaded terminals |
| type of connectable conductor cross-sections | |
| • solid without core end processing | 2x (0.25 ... 1.5 mm ²) |
| • finely stranded with core end processing | 2x (0.25 ... 0.75 mm ²) |
| • finely stranded without core end processing | 2x (0.25 ... 1.5 mm ²) |
| • at AWG cables | 2x (24 ... 16) |
| Ambient conditions | |
| • ambient temperature during operation | -25 ... +70 °C |
| • ambient temperature during storage | -40 ... +80 °C |
| environmental category during operation acc. to IEC 60721 | 3M6, 3S2, 3B2, 3C3 (without salt spray), 3K6 (with relative humidity of 10 ... 95%, no condensation in operation permitted) |
| Installation/ mounting/ dimensions | |
| fastening method | front panel mounting |
| • of modules and accessories | Front plate mounting |
| height | 36 mm |
| width | 9.8 mm |
| depth | 49.7 mm |
| Certificates/ approvals | |
| Further information | |
| Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10 | |
| Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1400-1AA10-3EA0-Z X90 | |
| Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1400-1AA10-3EA0-Z X90 | |
| Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3SU1400-1AA10-3EA0-Z X90 | |
| Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1400-1AA10-3EA0-Z X90&lang=en | |

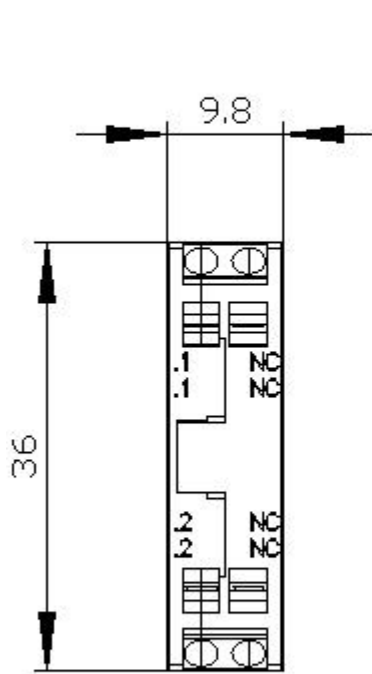

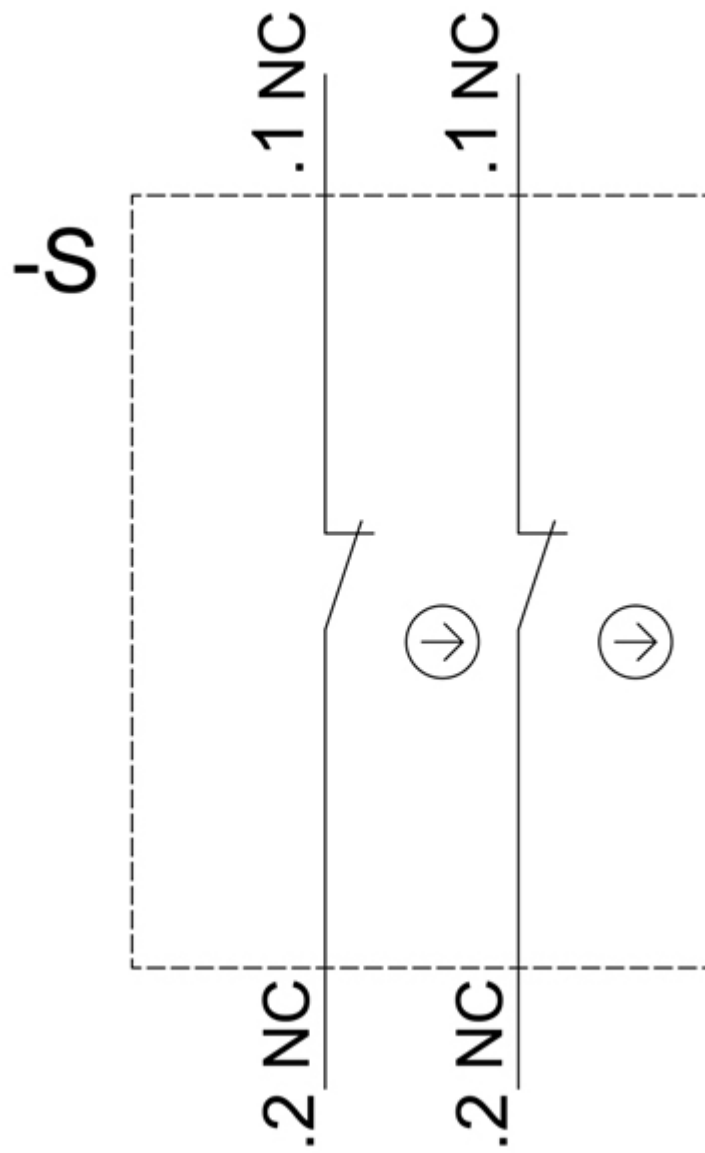

last modified:

12/23/2020 