



Direct starter, 3RM1, 500 V, 0.09 - 0.75 kW, 0.4 - 2 A, 24 V DC, spring-type terminals

<b>product brand name</b>	SIRIUS
<b>product category</b>	Motor starter
<b>product designation</b>	Direct-on-line starter
<b>design of the product</b>	with electronic overload protection
<b>product type designation</b>	3RM1
<b>General technical data</b>	
<b>trip class</b>	CLASS 10A
<b>product function</b>	
• intrinsic device protection	Yes
<b>suitability for operation device connector 3ZY12</b>	Yes
power loss [W] for rated value of the current at AC in hot operating state per pole	0.1 W
insulation voltage rated value	500 V
<b>surge voltage resistance rated value</b>	6 kV
<b>maximum permissible voltage for safe isolation</b>	
• between main and auxiliary circuit	500 V
• between control and auxiliary circuit	250 V
<b>shock resistance</b>	6g / 11 ms
<b>vibration resistance</b>	1 ... 6 Hz, 15 mm; 20 m/s <sup>2</sup> , 500 Hz
<b>operating frequency maximum</b>	1 1/s
mechanical service life (switching cycles) typical	30 000 000
<b>reference code acc. to IEC 81346-2</b>	Q
Substance Prohibitance (Date)	01.03.2017 00:00:00
<b>product function</b>	
• direct start	Yes
• reverse starting	No
<b>product function short circuit protection</b>	No
<b>Electromagnetic compatibility</b>	
<b>conducted interference</b>	
• due to burst acc. to IEC 61000-4-4	3 kV / 5 kHz
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV
• due to high-frequency radiation acc. to IEC 61000-4-6	10 V
<b>electrostatic discharge acc. to IEC 61000-4-2</b>	4 kV contact discharge / 8 kV air discharge
<b>conducted HF interference emissions acc. to CISPR11</b>	Class B for the domestic, business and commercial environments
<b>field-bound HF interference emission acc. to CISPR11</b>	Class B for the domestic, business and commercial environments

<b>Main circuit</b>	
number of poles for main current circuit	3
design of the switching contact as NO contact for signaling function	OUT, electronic, 24 V DC, 15 mA
adjustable current response value current of the current-dependent overload release	0.4 ... 2 A
minimum load [%]	20 %
type of the motor protection	solid-state
<ul style="list-style-type: none"> <li>operating voltage rated value</li> </ul>	48 ... 500 V
relative symmetrical tolerance of the operating voltage	10 %
operating frequency 1 rated value	50 Hz
operating frequency 2 rated value	60 Hz
relative symmetrical tolerance of the operating frequency	10 %
operational current <ul style="list-style-type: none"> <li>at AC at 400 V rated value</li> <li>at AC-53a at 400 V at ambient temperature 40 °C rated value</li> </ul>	2 A 2 A
ampacity when starting maximum	16 A
operating power for 3-phase motors at 400 V at 50 Hz	0.09 ... 0.75 kW
<b>Inputs/ Outputs</b>	
input voltage at digital input <ul style="list-style-type: none"> <li>at DC rated value</li> <li>with signal &lt;0&gt; at DC</li> <li>for signal &lt;1&gt; at DC</li> </ul>	24 V 0 ... 5 V 15 ... 30
input current at digital input <ul style="list-style-type: none"> <li>for signal &lt;1&gt; at DC</li> <li>with signal &lt;0&gt; at DC</li> </ul>	11 mA 1 mA
number of CO contacts for auxiliary contacts	1
operational current of auxiliary contacts at AC-15 at 230 V maximum	3 A
operational current of auxiliary contacts at DC-13 at 24 V maximum	1 A
<b>Control circuit/ Control</b>	
type of voltage of the control supply voltage	DC
<ul style="list-style-type: none"> <li>control supply voltage 1 at DC rated value</li> </ul>	24 V
operating range factor control supply voltage rated value at DC <ul style="list-style-type: none"> <li>initial value</li> <li>full-scale value</li> </ul>	0.8 1.25
control current at DC <ul style="list-style-type: none"> <li>in standby mode of operation</li> <li>when switching on</li> <li>during operation</li> </ul>	25 mA 150 mA 70 mA
<b>Response times</b>	
switch ON delay time	60 ... 90 ms
OFF delay time	60 ... 90 ms
<b>Installation/ mounting/ dimensions</b>	
mounting position	vertical, horizontal, standing (observe derating)
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail
height	100 mm
width	22.5 mm
depth	141.6 mm
required spacing <ul style="list-style-type: none"> <li>with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— backwards</li> <li>— upwards</li> </ul> </li> </ul>	0 mm 0 mm 50 mm

— downwards	50 mm
— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— backwards	0 mm
— upwards	50 mm
— at the side	3.5 mm
— downwards	50 mm
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	4 000 m
relative humidity during operation	10 ... 95 %
• air pressure acc. to SN 31205	900 ... 1 060 hPa
<b>Communication/ Protocol</b>	
product function bus communication	No
<b>Connections/ Terminals</b>	
<b>type of electrical connection</b>	spring-loaded terminals (push-in) for main circuit, spring-loaded terminals (push-in) for control circuit
• for main current circuit	spring-loaded terminals (push-in)
• for auxiliary and control circuit	spring-loaded terminals (push-in)
<b>type of electrical wiring</b>	
• for main current circuit	1 or 2 conductors
• for auxiliary and control circuit	1 or 2 conductors
<b>type of connectable conductor cross-sections</b>	
• for main contacts	
— solid	1x (0.5 ... 4 mm <sup>2</sup> )
— finely stranded with core end processing	1x (0.5 ... 2.5 mm <sup>2</sup> )
— finely stranded without core end processing	1x (0.5 ... 4 mm <sup>2</sup> )
• at AWG cables for main contacts	1x (20 ... 12)
<b>connectable conductor cross-section for main contacts</b>	
• solid or stranded	0.5 ... 4 mm <sup>2</sup>
• finely stranded with core end processing	0.5 ... 2.5 mm <sup>2</sup>
• finely stranded without core end processing	0.5 ... 4 mm <sup>2</sup>
<b>connectable conductor cross-section for auxiliary contacts</b>	
• solid or stranded	0.5 ... 1.5 mm <sup>2</sup>
• finely stranded with core end processing	0.5 ... 1 mm <sup>2</sup>
• finely stranded without core end processing	0.5 ... 1.5 mm <sup>2</sup>
<b>type of connectable conductor cross-sections</b>	
• for auxiliary contacts	
— solid	1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
— finely stranded with core end processing	1x (0.5 ... 1.0 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )
— finely stranded without core end processing	1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
• at AWG cables for auxiliary contacts	1x (20 ... 16), 2x (20 ... 16)
• AWG number as coded connectable conductor cross section for main contacts	20 ... 12
• AWG number as coded connectable conductor cross section for auxiliary contacts	20 ... 16
<b>UL/CSA ratings</b>	
<b>yielded mechanical performance [hp]</b>	
• for single-phase AC motor	
— at 230 V rated value	0.125 hp
• for 3-phase AC motor	
— at 200/208 V rated value	0.333 hp
— at 220/230 V rated value	0.333 hp
— at 460/480 V rated value	0.75 hp
<b>Certificates/ approvals</b>	
General Product Approval	EMC
	Declaration of

Declaration of  
Conformity

Test Certificates

other

Railway

[Miscellaneous](#)[Type Test  
Certificates/Test  
Report](#)[Confirmation](#)[Special Test  
Certificate](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1002-2AA04>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1002-2AA04>


Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)




<https://support.industry.siemens.com/cs/ww/en/ps/3RM1002-2AA04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RM1002-2AA04&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1002-2AA04&lang=en)

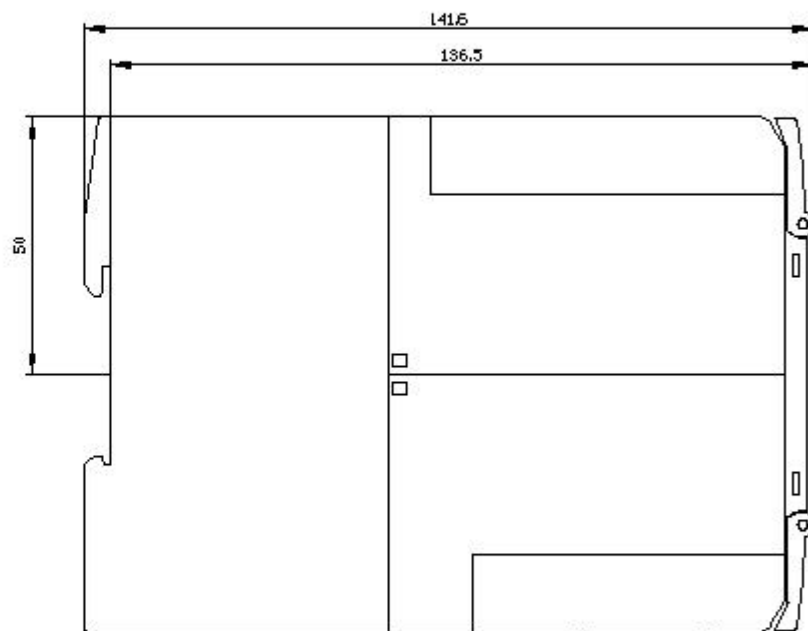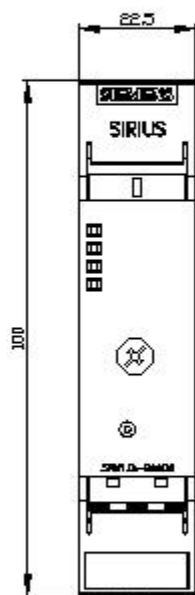

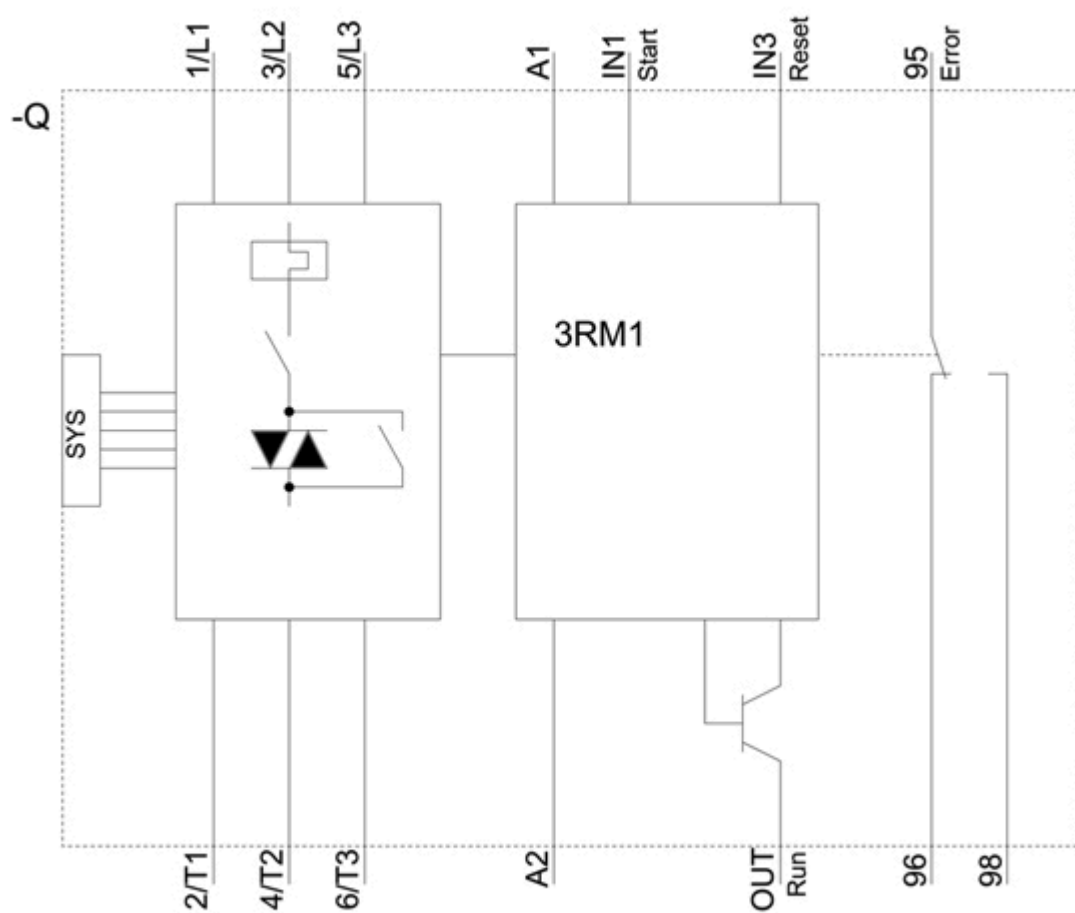

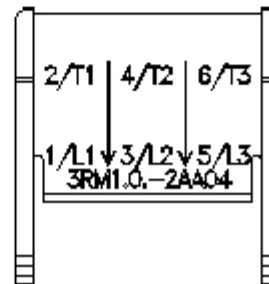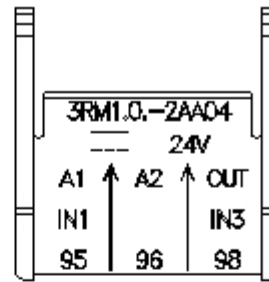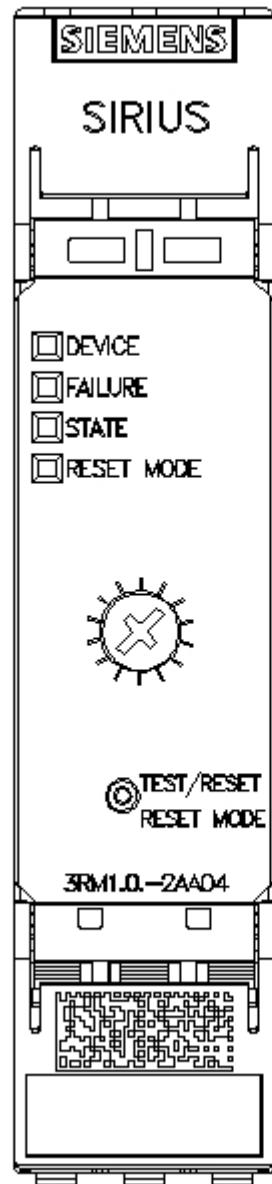

last modified:

12/23/2020