



Single-flash light element, w. built-in electronic flash, clear, 115 V AC, Diameter 70 mm

General technical data			
product brand name	SIRIUS		
product designation	Flashlight element		
design of the optical signal	flash light		
type of voltage of the operating voltage	AC		
operating voltage			
• 1 at AC at 50 Hz rated value	115 V		
• 1 at AC at 60 Hz rated value	115 V		
relative positive tolerance of the operating voltage	10 %		
relative negative tolerance of the operating voltage	-10 %		
material	PC		
color	clear		
fastening method	Bayonet		
reference code			
• acc. to DIN EN 61346-2	P		
• acc. to IEC 81346-2	P		
Mechanical data			
outer diameter of the signal column element	70 mm		
Lamp			
product component light source	Yes		
type of light source	Xenon gas discharge lamp		
flash frequency	1 Hz		
number of flashes of light element	4 000 000		
light intensity	32 098 cd		
Ambient conditions			
ambient temperature during operation	-20 ... +50 °C		
protection class IP	IP65		
height	65.5 mm		
width	70 mm		
Certificates/ approvals			
General Product Approval	EMC	Declaration of Conformity	other



[Miscellaneous](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=8WD4440-0CE>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=8WD4440-0CE>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WD4440-0CE>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=8WD4440-0CE&lang=en

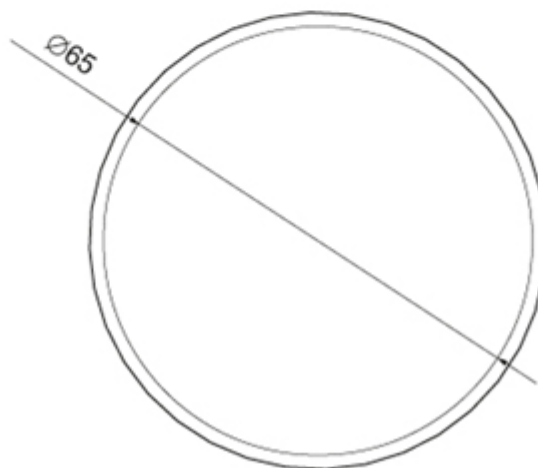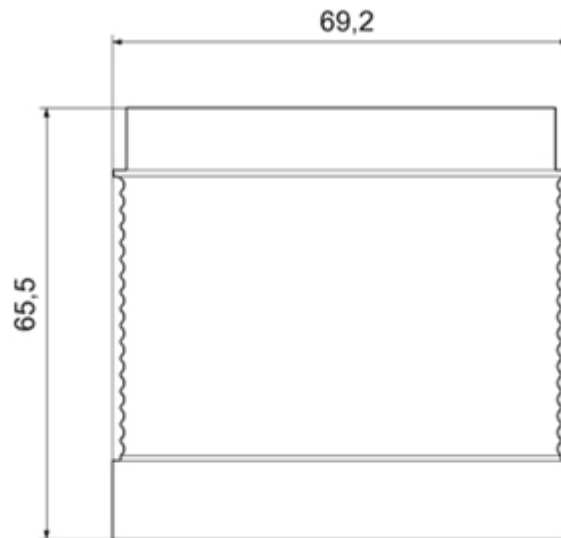

last modified:

12/23/2020 