SIEMENS

Data sheet 3RF2310-3AA04

Solid-state contactor 1-phase 3RF2 AC 51 / 10 A / 40 °C 48-460 V / 24 V DC Ring cable connection

product brand name	SIRIUS
product designation	solid-state contactor
design of the product	single-phase
product type designation	3RF23
manufacturer's article number	
● _1 of the accessories that can be ordered	3RF2900-3PA88
● _3 of the accessories that can be ordered	3RF2900-0EA18
● _4 of the accessories that can be ordered	3RF2920-0GA16
product designation	
● _1 of the accessories that can be ordered	terminal cover
● _3 of the accessories that can be ordered	converter
● _4 of the accessories that can be ordered	load monitoring
General technical data	
product function	zero-point switching
power loss [W] for rated value of the current at AC in hot operating state	11 W
● per pole	11 W
power loss [W] for rated value of the current without load current share typical	0.4 W
insulation voltage rated value	600 V
degree of pollution	3
type of voltage of the control supply voltage	DC
shock resistance acc. to IEC 60068-2-27	15g / 11 ms
vibration resistance acc. to IEC 60068-2-6	2g
reference code acc. to IEC 81346-2	Q
Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
● operating voltage at AC	
— at 50 Hz rated value	48 ... 460 V
— at 60 Hz rated value	48 ... 460 V
operating frequency rated value	50 ... 60 Hz
operating range relative to the operating voltage at AC	
● at 50 Hz	40 ... 506 V
● at 60 Hz	40 ... 506 V
operational current	
● at AC-1 at 400 V rated value	10.5 A

Subject to change without notice
© Copyright Siemens

● at AC-51 rated value	10.5 A
● acc. to UL 508 rated value	9.6 A
operational current minimum	100 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	500 V/µs
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	200 A
I2t value maximum	200 A²·s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1	
● at DC rated value	30 V
● at DC	15 ... 24 V
control supply voltage	
● at DC initial value for signal <1> detection	15 V
● at DC full-scale value for signal<0> recognition	5 V
control current at minimum control supply voltage	
● at DC	13 mA
control current at DC rated value	15 mA
switch ON delay time	1 ms; additionally max. one half-wave
OFF delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail
● side-by-side mounting	Yes
height	100 mm
width	22.5 mm
depth	91 mm; 94.0 mm up to product revision E05
Connections/ Terminals	
type of electrical connection	
● for main current circuit	Ring cable lug connection
● for auxiliary and control circuit	ring cable connection
type of connectable conductor cross-sections	
● for main contacts for JIS cable lug	JIS C 2805 R 2-5, 5,5-5, 8-5, 14-5
● for DIN cable lug for main contacts	DIN 46234 -5-2,5, -5-6, -5-10, -5-16, -5-25
type of connectable conductor cross-sections	
● for auxiliary and control contacts	
— solid	1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.0 mm²)
— finely stranded with core end processing	1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.0 mm²)
— finely stranded without core end processing	1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.0 mm²)
● at AWG cables for auxiliary and control contacts	1x (AWG 20 ... 12)
● tightening torque for main contacts with screw-type terminals	2 ... 2.5 N·m
● tightening torque for auxiliary and control contacts with screw-type terminals	0.5 ... 0.6 N·m
● tightening torque [lbf·in] for auxiliary and control contacts with screw-type terminals	4.5 ... 5.3 lbf·in
design of the thread of the connection screw	
● for main contacts	M5
● of the auxiliary and control contacts	M3
stripped length of the cable	
● for main contacts	10 mm

Subject to change without notice
© Copyright Siemens

● for auxiliary and control contacts	7 mm
UL/CSA ratings	
Safety related data	
protection class IP on the front acc. to IEC 60529	IP00; IP20 with cover
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front with cover
Ambient conditions	
installation altitude at height above sea level maximum	1 000 m
● ambient temperature during operation	-25 ... +60 °C
● ambient temperature during storage	-55 ... +80 °C
Electromagnetic compatibility	
conducted interference	
● due to burst acc. to IEC 61000-4-4	2 kV / 5 kHz behavior criterion 2
● due to conductor-earth surge acc. to IEC 61000-4-5	2 kV behavior criterion 2
● due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV behavior criterion 2
● due to high-frequency radiation acc. to IEC 61000-4-6	140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1
field-based interference acc. to IEC 61000-4-3	80 MHz ... 1 GHz 10 V/m, behavior criterion 1
electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
conducted HF interference emissions acc. to CISPR11	Class A for industrial environment
field-bound HF interference emission acc. to CISPR11	Class B for the domestic, business and commercial environments
Short-circuit protection, design of the fuse link	
manufacturer's article number	
● of gS fuse for semiconductor protection at NH design usable	3NE1813-0
● of full range R fuse link for semiconductor protection at cylindrical design usable	5SE1316
● of back-up R fuse link for semiconductor protection at NH design usable	3NE8015-1
● of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable	3NC1016
● of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	3NC1420
● of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable	3NC2220
manufacturer's article number of the gG fuse	
● at NH design usable	3NA6801
● at cylindrical design 10 x 38 mm usable	3NW6001-1; These fuses have a smaller rated current than the semiconductor relays
● at cylindrical design 14 x 51 mm usable	3NW6101-1; These fuses have a smaller rated current than the semiconductor relays
manufacturer's article number	
● of DIAZED fuse usable	5SB141
● of NEOZED fuse usable	5SE2306; These fuses have a smaller rated current than the semiconductor relays

Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity

Miscellaneous

Test Certificates	other

Type Test Certificates/Test Report

Confirmation

Subject to change without notice
© Copyright Siemens

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2310-3AA04
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2310-3AA04
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RF2310-3AA04
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2310-3AA04&lang=en

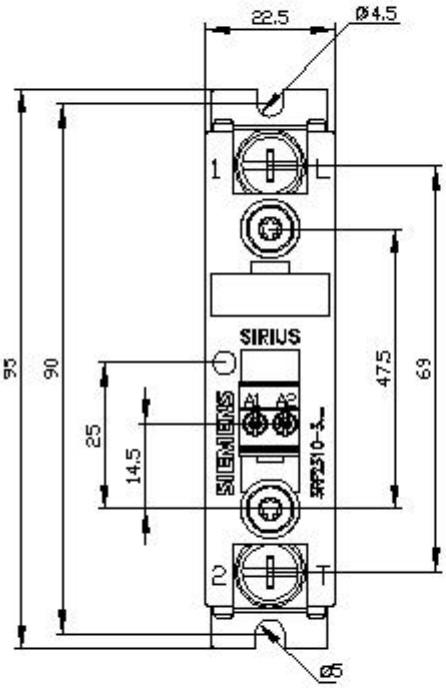

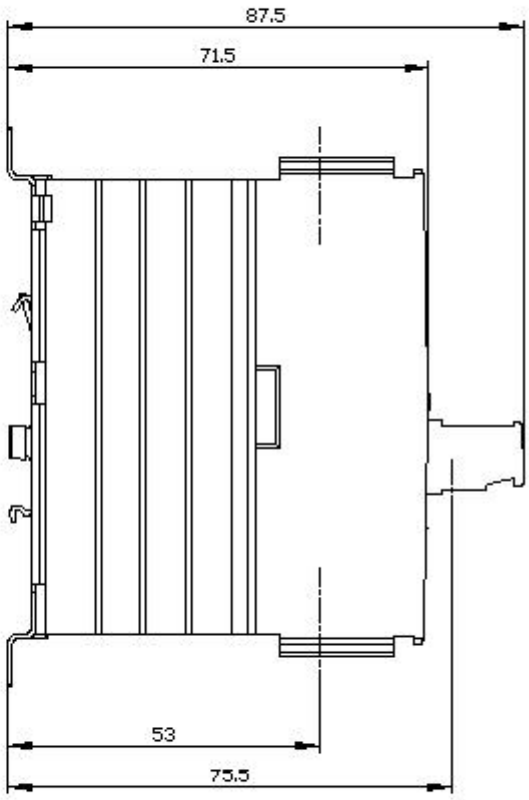

© Copyright Siemens

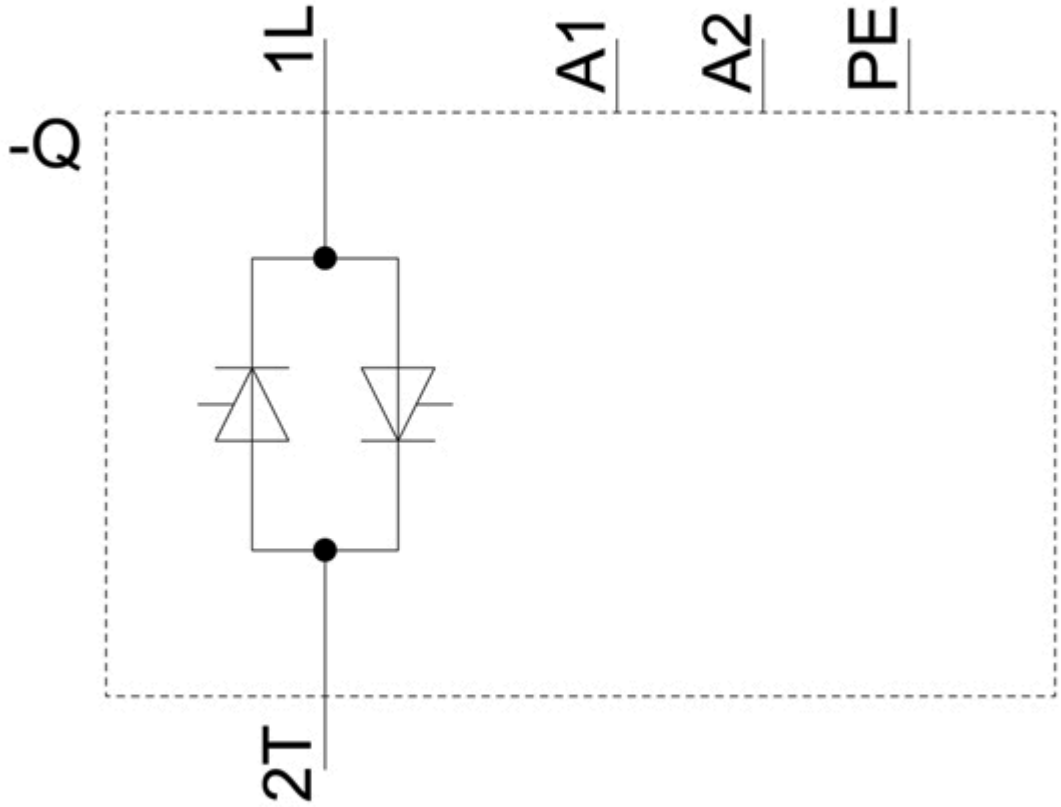

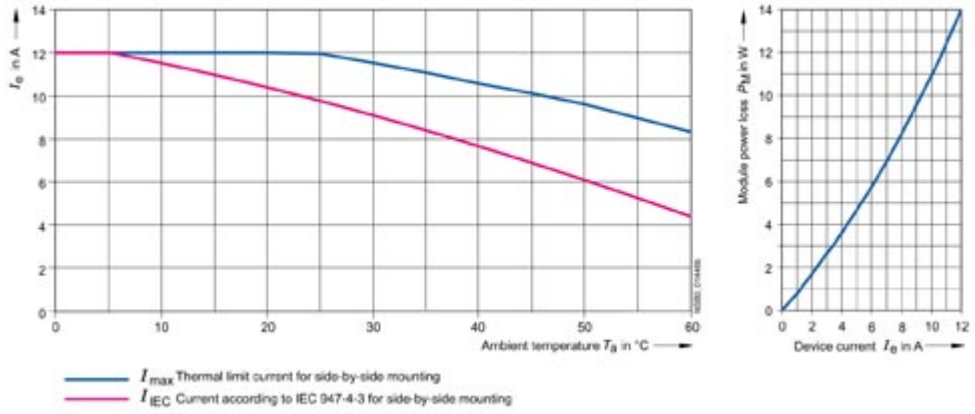

last modified: 12/15/2020

Subject to change without notice
© Copyright Siemens